


SPECIFICATION
 Current Rated:1.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contat:Phosphor Bronze,Tin Plated Over Nickel
 Insulator:PBT+15%G.F.(UL94V-0),Red
 RoHS Compliant

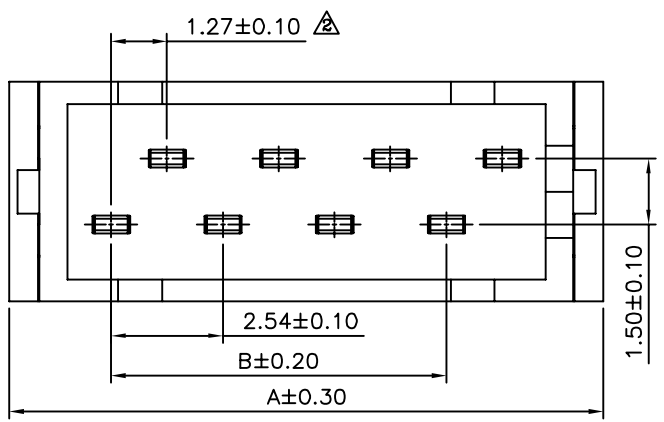

Pin	A	B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°			
PART No. MIMXXBC-H		CHECKED BY HZF					
DRAWING No. MIMXXBC-H		DRAWING BY WSS					
SCALE	NONE	REV.	A2				
UNIT mm				NO.REV.	REVISIONS	CHK	DATE

△ A2	Modify Data	HZF	10/20/2011
△ A1	Modify Data	HZF	02/21/2011
△ A0	NEW RELEASE	HZF	11/09/2008