
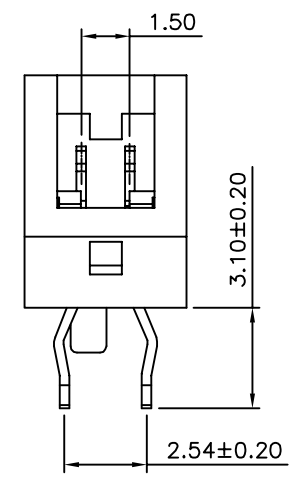
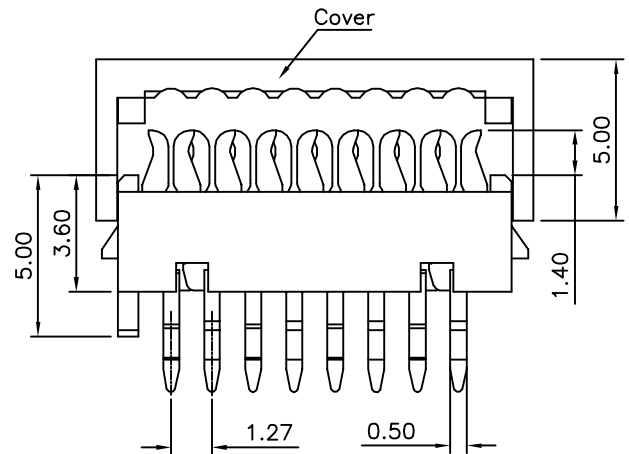


Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance: ±0.05)

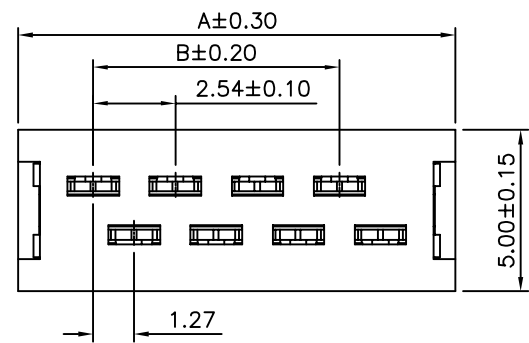

SPECIFICATION

Current Rating: 1.0 Amp
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -25°C ~ +85°C
 Contact: Phosphor Bronze, Tin Plated Over Nickel
 Insulator: PBT+15%G.F. (UL94V-0)
 RoHS Compliant

- MIM XX IP -H
 (1) (2) (3) (4)
 (1) MIM: 2.54mm Micro Match
 (2) XX: No. Of Position
 (3) IP: IDC Plug
 (4) H: RoHS Compliant

Pin	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.10 ANG. ±3°
PART No. MIMXXIP-H		CHECKED BY HZF		
DRAWING No. MIMXXIP-H		DRAWING BY HTP		
SCALE	NONE	REV.	A0	
UNIT	mm			

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	08/14/2011
		REVISIONS		