



△△ SPECIFICATION

Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Relative Humidity: 70% ±10%RH
 Insulation Resistance:500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance:20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability:750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Housing:PA9T(UL94V-0),Black
 Insert Housing:PA46(UL94V-0),Black
 Contact:Phosphor Bronze
 Shield:Brass,Nickel Plated
 LED Solder Tail:Steel,Tin Plated
 Cavity Conforms To FCC Rules And
 Regulations Part 68,Subpart F.
 RoHS Compliant





△ MJ UW 0808 F X XX P X X - H
 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10)

- (1) MJ:Modular Jack
- (2) UW:Upper LED Series SMT Right Angle
- (3) 0808:8P8C
- (4) F:Full Shielded
- (5) X:Without Panel Ground
- (6) XX:Contact Finish
 06:Gold Plated 6u" On Contact Area,
 Gold Flash On Solder Tails,Over Nickel
 15:Gold Plated 15u" On Contact Area,
 Gold Flash On Solder Tails,Over Nickel
 30:Gold Plated 30u" On Contact Area,
 Gold Flash On Solder Tails,Over Nickel
- (7) P:With Post
- (8) X:Right LED Color
- (9) X:Left LED Color
- (10) H:RoHS Compliant

LED Color					
Code	Forward	Reverse	Code	Forward	Reverse
A	Green	Red	J	Green	Orange
C	Green	Yellow(Amber)	K	Black	_____
D	Yellow	Red	L	Lime	_____
E	Yellow	Green	M	Orange	Green
F	Red	Green	N	Amber	_____
G	Green	_____	O	Orange	_____
H	Red	Yellow	R	Red	_____
I	Beige	_____	Y	Yellow	_____

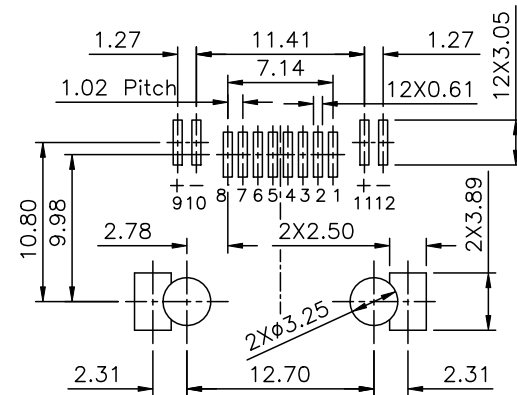

△ Recommended P.C.B. Layout

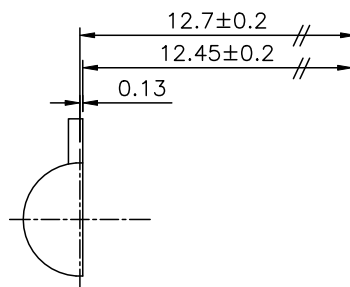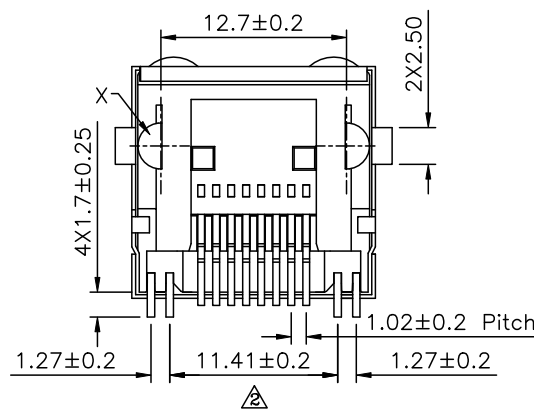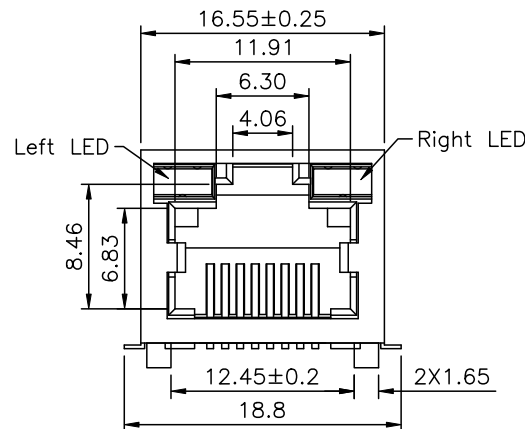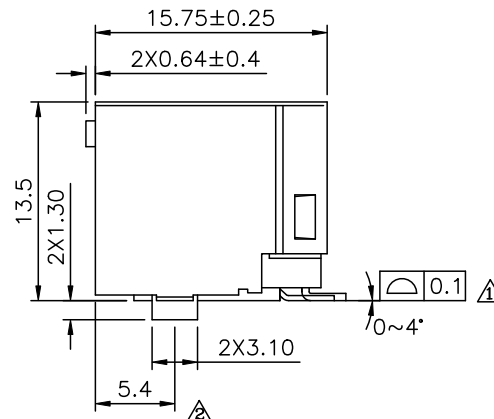

△△ Detail X

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.13 .XXX ±0.05	
PART No. MJUW0808FXXXPXX-H		MEI			
DRAWING No. MJUW0808FXXXPXX-H		CHECKED BY HZF			
		DRAWING BY CYP			
SCALE	NONE	REV.	A2	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/30/2017
△ A1		Modify Data	HZF	05/19/2014
△ A0		NEW RELEASE	HZF	09/07/2010