File No.	640HK04801	SHEET	1/1

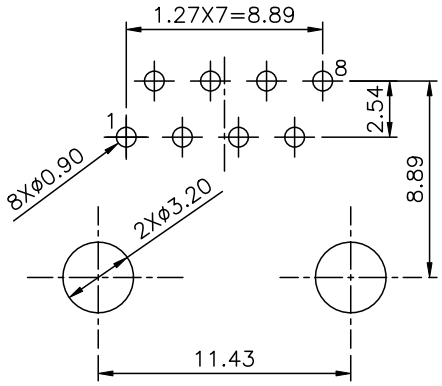

1 Recommended P.C.B. Layout
Thickness=1.6mm

2 1 SPECIFICATION
Voltage Rating:125V AC RMS
Current Rating:1.5 Amps @ 25°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. @ 500V DC
4 Withstand Voltage:1000V DC Or AC Peak; One Contact To All Other Contacts Connected Together
1500V DC Or AC Peak; All Contacts Connected Together To Shield (Housing/Mounting Plate)If Present
Housing:PBT(UL94V-0),Black
Contact:Phosphor Bronze ⌀0.46mm
Mating/Unmating Force:30N Max.
Retention Strength:50N For 60s±5s
Durability:750 Cycles Min.
Storage Temperature:-40°C~+85°C Relative Humidity<80%
Operation Temperature:-40°C~+85°C
Mates With Modular Plug Conforming To IEC-60603&TIA-1096
RoHS Compliant

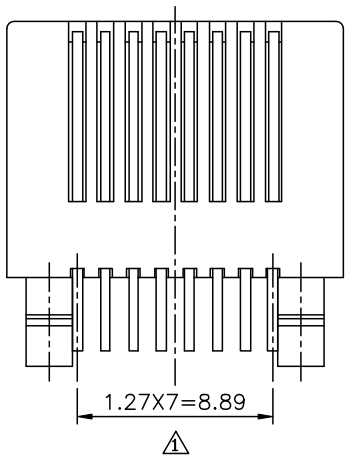

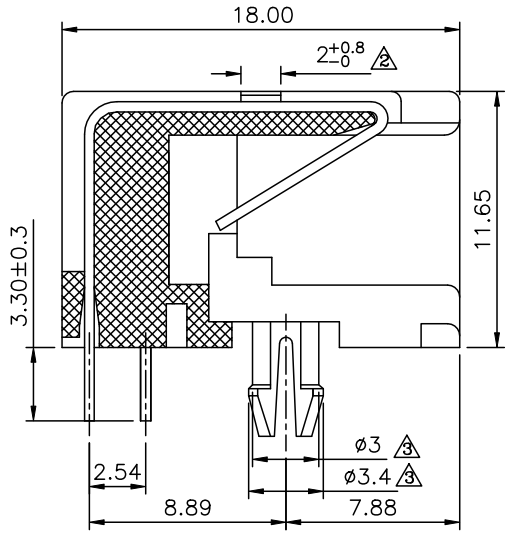

1 Section A-A

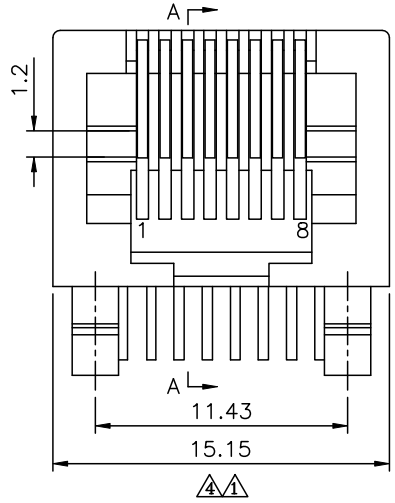

2 1 MJV (1) 0808 (2) K (3) X (4) XX (5) - H (6)

(1) MJV:Modular Jack Very Low Profile 11.65mm
(2) 0808:8P8C
(3) K:Insulator Color Black
(4) X:Without Panel Stop
(5) XX:Contact Finish
01:Gold Flash Over All,Over Nickel
06:Gold Plated 6u" Over All,Over Nickel
15:Gold Plated 15u" Over All,Over Nickel
30:Gold Plated 30u" Over All,Over Nickel
(6) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No.	MJV0808KXXX-H	CHECKED BY	HZF
DRAWING No.	MJV0808KXXX-H	DRAWING BY	CYP
SCALE	NONE	REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
0~15 ±0.15
15~30 ±0.20
1 30~ ±0.25
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	11/04/2017
3	A3	Modify Data	HZF	06/07/2017
2	A2	Modify Data	HZF	10/08/2013
1	A1	Modify Data	HZF	12/06/2010
0	A0	NEW RELEASE	HZF	12/30/2007