
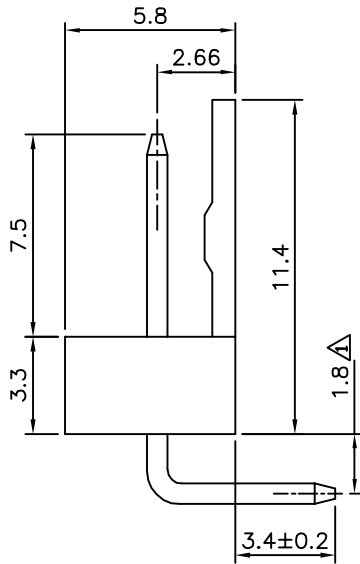
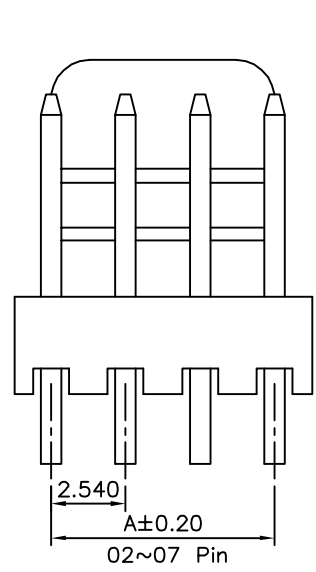
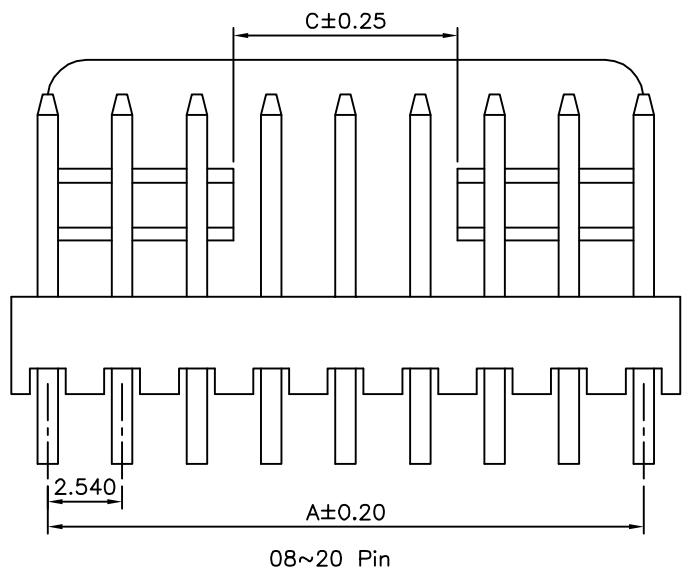
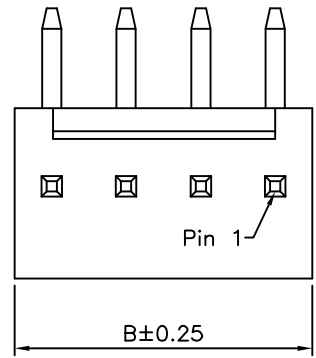
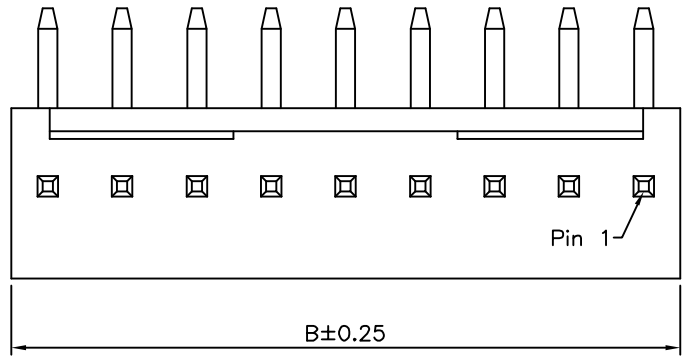


SPECIFICATION
 Current Rating:2.5A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1000V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2),Beige
 Contact:Brass,Tin Plated
 RoHS Compliant

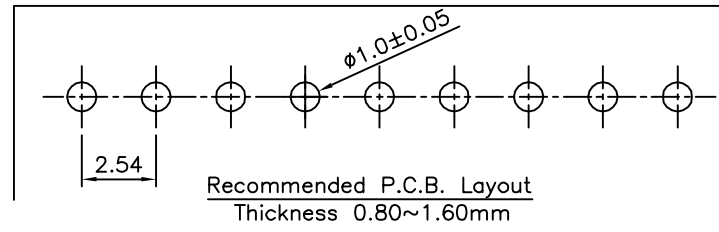

- △ MK XX R - H
 (1) (2) (3) (4)
- (1) MK:2.54mm MK Series
 - (2) XX:No. Of Position
 - (3) R:DIP Right Angle
 - (4) H:RoHS Compliant

Pin	A	B	C	Pin	A	B	C
02	2.54	5.08	/	12	27.94	30.48	15.24
03	5.08	7.62		13	30.48	33.02	17.78
04	7.62	10.16		14	33.02	35.56	20.32
05	10.16	12.70		15	35.56	38.10	22.86
06	12.70	15.24		16	38.10	40.64	25.40
07	15.24	17.78		17	40.64	43.18	27.94
08	17.78	20.32		18	43.18	45.72	30.48
09	20.32	22.86		19	45.72	48.26	33.02
10	22.86	25.40		20	48.26	50.80	35.56
11	25.40	27.94		12.70			

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05
PART No. MKXXR-H		EMILY		
DRAWING No. MKXXR-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY HAO		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify P/N Code	HZF	05/22/2015
△A1		Add Dim.	HZF	07/03/2012
△A0		NEW RELEASE	HZF	05/21/2011