


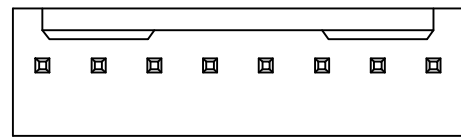


Recommended P.C.B. Layout


SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC Max.
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Terminal:Brass,Tin Plated Over Nickel
 Insulator:PA66(UL94V-2)
 RoHS Compliant



2~5 Pin

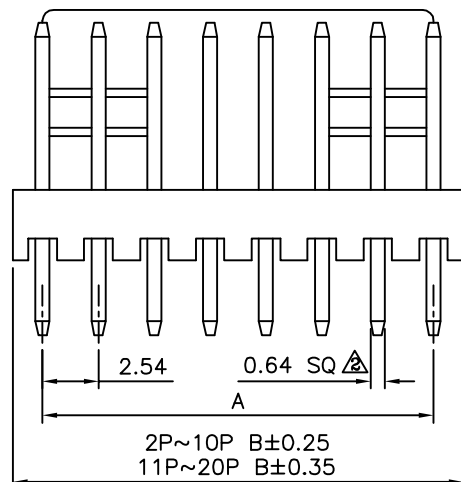

6~20 Pin

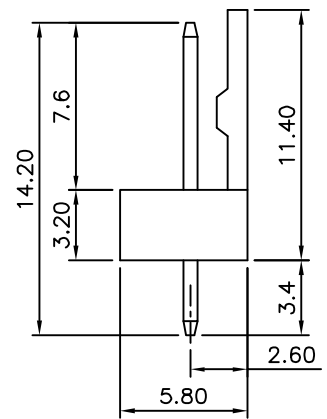

- MK XX D - XX - H**
 (1) (2) (3) (4) (5)
 (1) MK:2.54mm MK Series
 (2) XX:No. Of Position
 (3) D:DIP Straight
 (4) XX:Insulator Color
 Blank:Nature
 BK:Black
 BL:Blue
 GR:Green
 RD:Red
 (5) H:RoHS Compliant

Pin	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
20	48.26	50.80

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.25 ANG.	A4	Modify Data	HZF	06/02/2015
PART No. MKXXD-XX-H		CHECKED BY HZF			A3	Modify P/N Code	HZF	01/19/2013
DRAWING No. MKXXD-XX-H		DRAWING BY HAO			A2	Modify P/N:MKXXD-H --> MKXXD-XX-H	HZF	08/21/2010
SCALE	NONE	REV.	A4		A1	Add Tolerance	BECKY	2005/05/12
				UNIT			A0	NEW RELEASE
				mm			NO.REV.	REVISIONS
						CHK	DATE	