
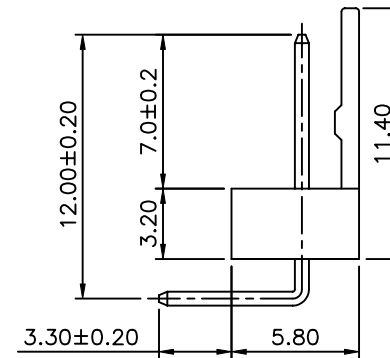
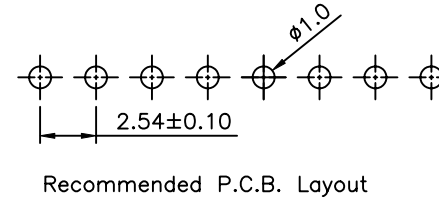


SPECIFICATION

Current Rating:3 A AC/DC
Voltage Rating:250V AC Max.
Dielectric Withstanding Voltage:1500V AC/Minute
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-25°C~+85°C
Insulator:PA66 UL94V-2,Natural
Terminal:Brass,Tin Plated
RoHS Compliant

MK XX L - H
(1) (2) (3) (4)

- (1) MK:2.54 MK Series
- (2) XX:No. Of Position/Per Row
- (3) L:DIP Right Angle Reverse Type
- (4) H:RoHS Compliant

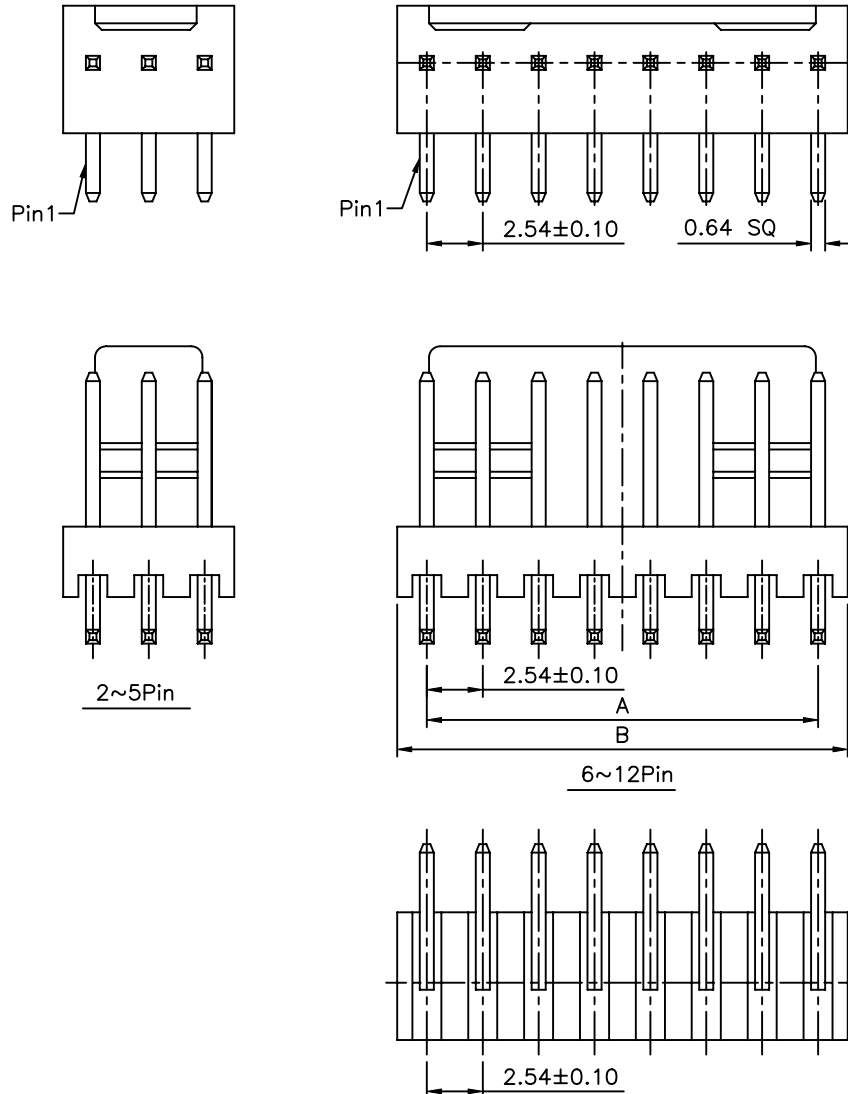

Pin	A	B	Tolerance
2	2.54	5.12	±0.20
3	5.08	7.66	
4	7.62	10.20	
5	10.16	12.74	
6	12.70	15.30	
7	15.24	17.94	±0.30
8	17.78	20.48	
9	20.32	23.02	
10	22.86	25.58	
11	25.40	28.12	
12	27.94	30.68	

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.25						
PART No. MKXXL-H		CHECKED BY HZF								
DRAWING No. MKXXL-H		DRAWING BY WZL								
SCALE	NONE	REV.	BO	UNIT mm		 BO	NEW RELEASE		HZF	11/24/2009
						NO. REV.	REVISIONS		CHK	DATE