


Recommended P.C.B. Layout (Top Side)  
(PCB Board Tolerance ±0.05)

**SPECIFICATION**


Current Rating: 3.0 Amp  
 Withstand Voltage: 1000V AC/DC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -25°C ~ +85°C  
 Insulator: PA66 (UL94V-0), White  
 Contact: Brass, Tin Plated Over Nickel  
 RoHS Compliant

MKL XX R - V0 - H  
 (1) (2) (3) (4) (5)



- (1) MKL: 2.54mm MKL Series
- (2) XX: No. Of Position
- (3) R: DIP Right Angle
- (4) V0: UL94V-0
- (5) H: RoHS Compliant

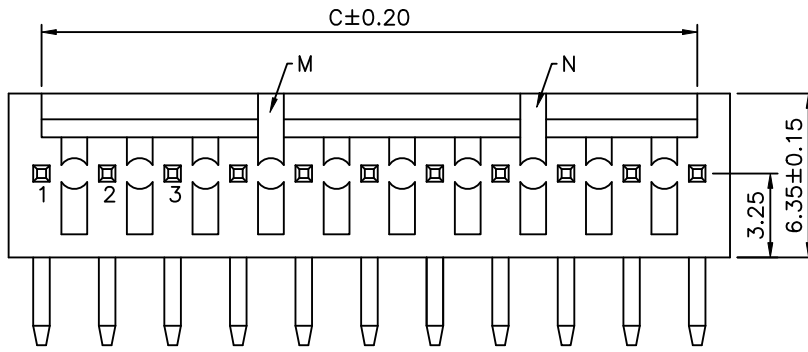

11~20 Pin

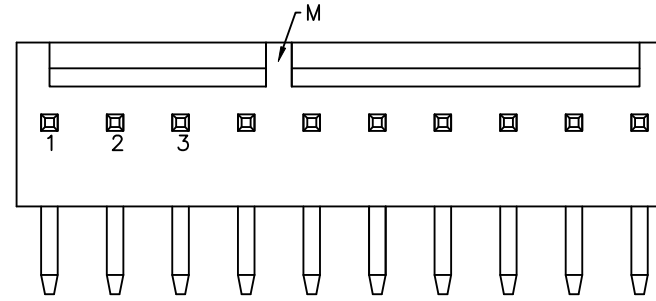

02~10 Pin

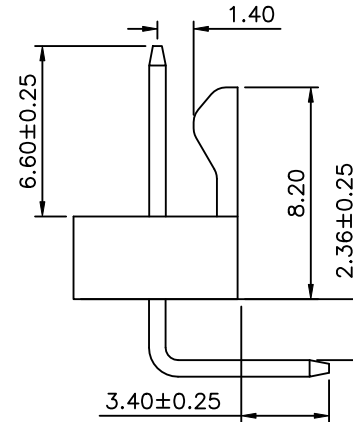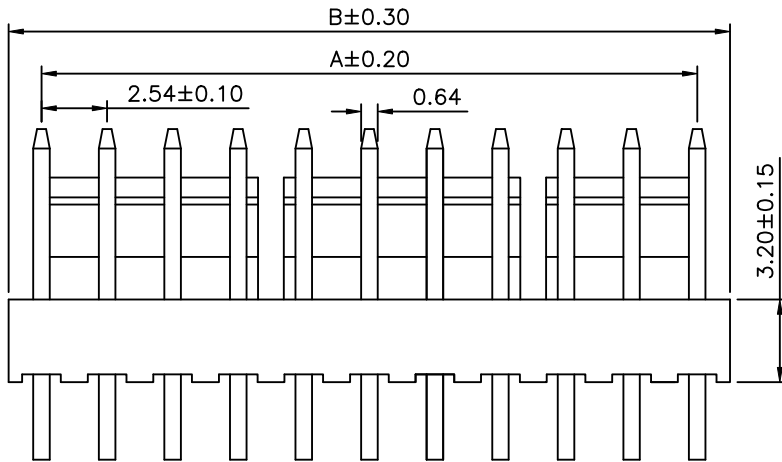

Pin	A	B	C
2	2.54	5.08	2.54
3	5.08	7.62	5.08
4	7.62	10.16	7.62
5	10.16	12.70	10.16
6	12.70	15.24	12.70
7	15.24	17.78	15.24
8	17.78	20.32	17.78
9	20.32	22.86	20.32
10	22.86	25.40	22.86
11	25.40	27.94	25.40
12	27.94	30.48	27.94
13	30.48	33.02	30.48
14	33.02	35.56	33.02
15	35.56	38.10	35.56
16	38.10	40.64	38.10
17	40.64	43.18	40.64
18	43.18	45.72	43.18
19	45.72	48.26	45.72
20	48.26	50.80	48.26

Pin	Slot M	Slot N
2~5P	None	None
6~10P		None
11~14P	Between Circuit 4,5P	Between Circuit 8,9P
15~18P		Between Circuit 12,13P
19~20P		Between Circuit 16,17P

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
PART No. MKLXXR-V0-H		MEI		
DRAWING No. MKLXXR-V0-H		HZF		
		CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	09/25/2016
		REVISIONS		