
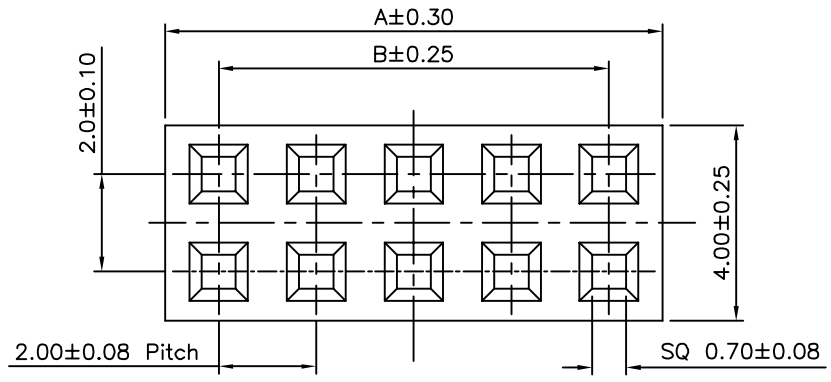


SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:200V AC/DC
 Withstanding Voltage:650V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Material:PBT+15%G.F.(UL94V-0),Black
 RoHS Compliant


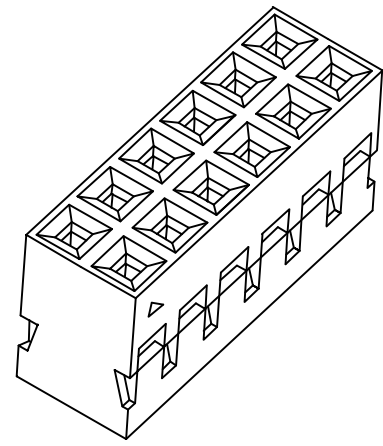


△ MPV $\frac{2}{(1)} \times \frac{XX}{(2)} - \frac{H}{(4)}$

- △ (1) MPV:2.0mm MPV Series
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) H: RoHS Compliant



Pin	A	B
04	4.40	2.0
06	6.40	4.0
08	8.40	6.0
10	10.40	8.0
12	12.40	10.0
14	14.40	12.0
16	16.40	14.0
18	18.40	16.0
20	20.40	18.0
22	22.40	20.0
24	24.40	22.0
26	26.40	24.0
28	28.40	26.0
30	30.40	28.0
32	32.40	30.0
34	34.40	32.0
36	36.40	34.0
38	38.40	36.0
40	40.40	38.0

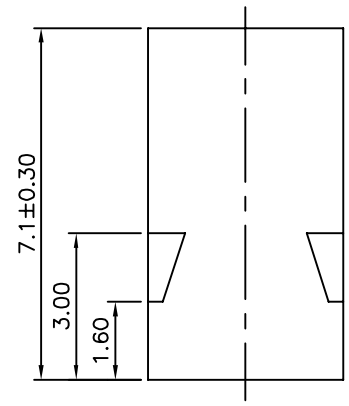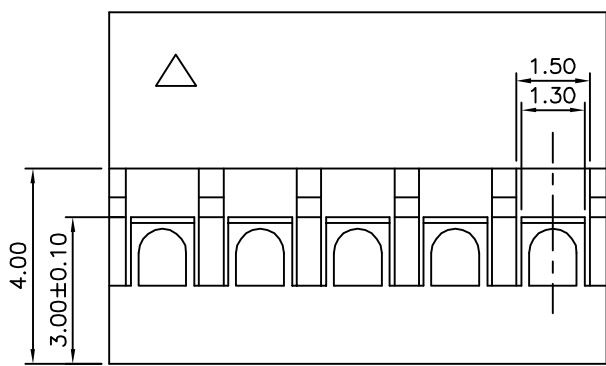

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
		MEI		
PART No.		CHECKED BY		.X ±0.25 .X* ±2* .XX ±0.20 .XX* ±1* .XXX ±0.10
MPV2XXX-H		HZF		
DRAWING No.		DRAWING BY		UNIT mm
MPV2XXX-H		CYP		
SCALE	NONE	REV.	B2	NO. REV.
				CHK
				DATE

△ B2	Modify Data	HZF	07/09/2015
△ B1	Modify Data	HZF	11/01/2013
△ B0	NEW RELEASE	HZF	03/03/2009