

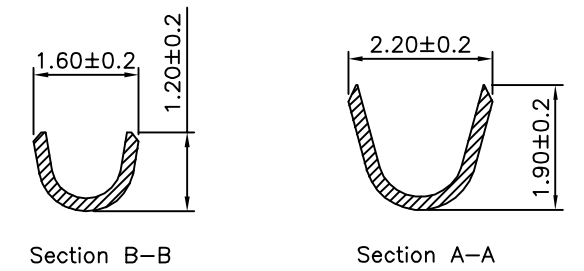
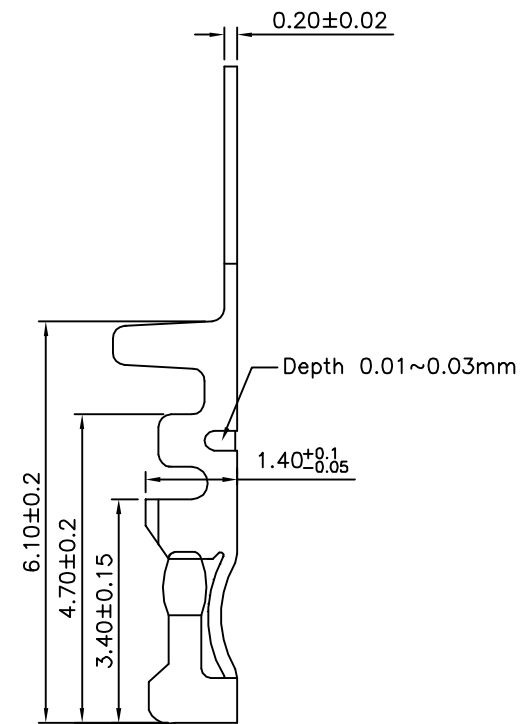


SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:200V AC/DC
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Material:Phosphor Bronze,Selective Gold Flash
 Over Nickel Stamping Before Plated
 Wire Range:AWG#26~#30
 O.D.:1.40mm Max.
 Q'ty:10000 PCS/Reel
 RoHS Compliant

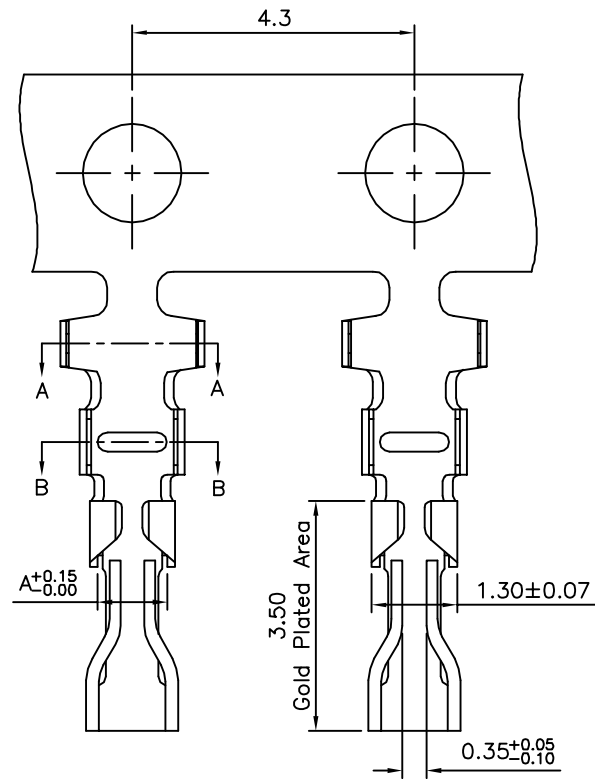

△	P/N	Mating Housing P/N	A
	MPVS-R10K-H	MPV1X02-H~MPV1X10-H MPV2X02-H~MPV2X10-H	0.80
	MPVS-L-R10K-H	MPV1X11-H~MPV1X16-H MPV2X11-H~MPV2X24-H	0.92

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

SERIES	MPV	APPROVED BY	EMILY
PART No.	△△ MPVS-X-R10K-H	CHECKED BY	HZF
DRAWING No.	MPVS-X-R10K-H	DRAWING BY	SONG
SCALE	NONE	REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25 .X' ±2'
 .XX ±0.20 .XX' ±1'
 .XXX ±0.10

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify P/N:MPVS-X-H --> MPVS-X-R10K-H	HZF	09/10/2014
△	B0	Modify P/N:MPV-G-H --> MPVS-X-H	HZF	01/15/2013
△	B0	NEW RELEASE	HZF	01/15/2013