


SPECIFICATION




Current Rating:1.5 Amps/Contact Max.
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

MV P 22 - 2 X XX C - H
 (1)(2)(3) (4) (5)(6) (7)

- (1) MV:2.0mm Pin Header SMT Straight
- (2) P:With Post
- (3) 22:SMT Height 2.2mm
- (4) 2:Dual Row
- (5) XX:No. Of Position/Per Row
- (6) C:With Cap
- (7) H:RoHS Compliant

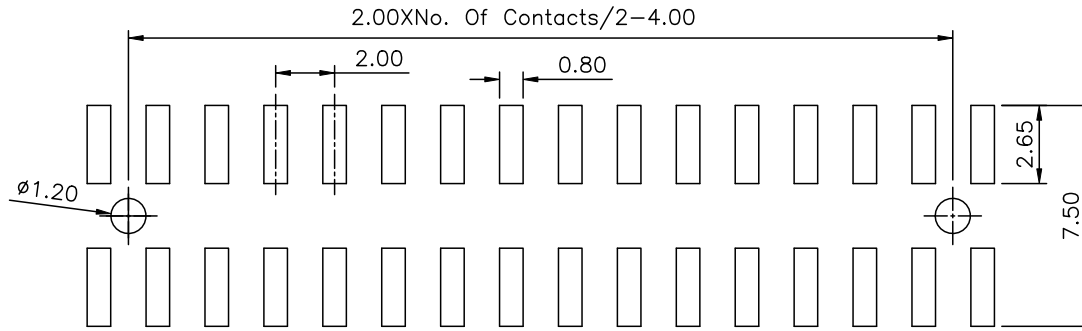

Recommended P.C.B. Layout

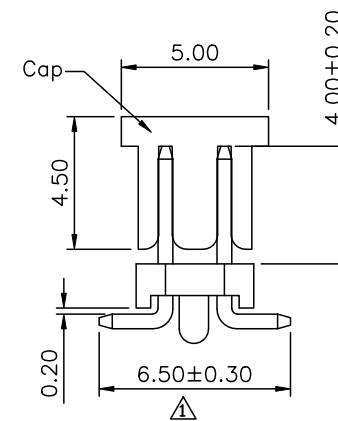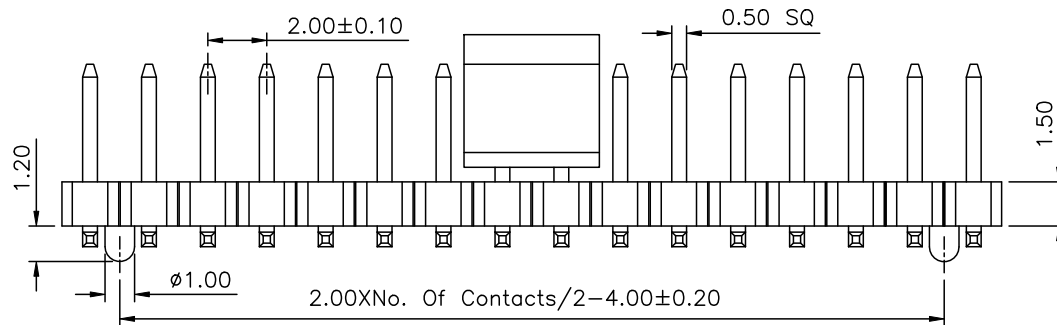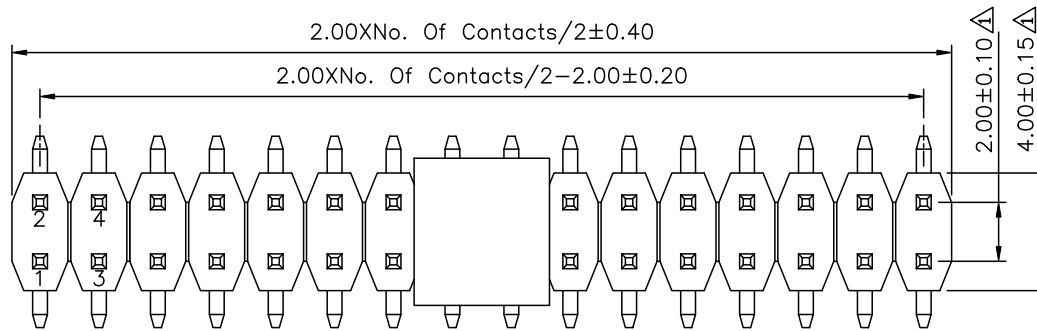

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.50 XX ±0.30 XXX ±0.20 XXXX ±0.10 ANG. ±5°
PART No. MVP22-2XXXC-H		MEI		
DRAWING No. MVP22-2XXXC-H		HZF		
SCALE		REV.		UNIT
NONE		A1		mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	12/06/2017
△A0		NEW RELEASE	HZF	09/12/2014