


NL6448AC26-47D

8.4" VGA
Industrial use

[Features]

- High contrast
- 6-bit digital RGB signals
- Reversible-scan direction
- DE (Data enable) function
- Long life LED backlight^{*1}
- Built in LED driver

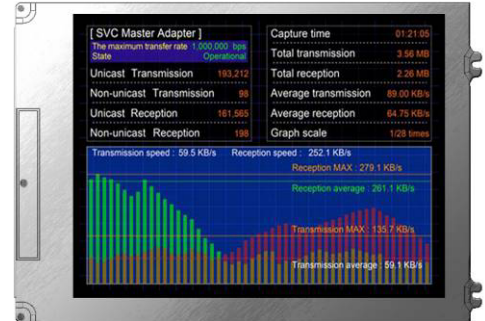

Pixel	640(H) x 480(V)
Display area	170.88(H) x 128.16(V)mm (8.4 inches (21cm) diagonal)
Display color	262,144 colors
Pixel pitch	0.267(H) x 0.267(V)mm
Luminance	380cd/m ² (typ.)
Contrast ratio	1,000:1 (typ.)
Viewing angle^{*2}	Up: 80° (typ.), Down: 80° (typ.), Left: 80° (typ.), Right: 80° (typ.)
Response time^{*3}	8ms (typ.)
Interface	CMOS, RGB 6-bit
Power supply voltage	LCD panel signal processing board: 3.3V or 5.0V (typ.) LED driver: 12.0V (typ.)
Power consumption	3.3W (typ.)
Operating temperature	-30°C to +80°C
Storage temperature	-30°C to +80°C
Polarizer surface	Antiglare
Module size	221.0 (typ.) x 152.4 (typ.) x 9.5 (max.) mm
Weight	285g (typ.)
Backlight	LED backlight (Replaceable)
LED driver	Built-in

*1: 100k hours long life LED, *2: Contrast ratio ≥ 10:1, *3: Ton+Toff (10%←→90%)

*All information is subject to change without notice.

*Screen image is simulated.

<NLT Technologies web site>

Japanese <http://www.nlt-technologies.co.jp/jp>

English <http://www.nlt-technologies.co.jp/en>

Published date: February 2016
©NLT Technologies, Ltd. 2016