


NL6448BC20-30F

6.5" VGA
Industrial use
[Features]

- **ColorXcell**^{※1}
- **High luminance (1000cd/m²)**
- **High contrast (800:1)**
- **16.77M/262K colors (LVDS RGB 8-bit/6-bit)**
- **Wide temperature(-30°C to +80°C)**
- **Reversible-scan direction**
- **Long-life LED backlight**^{※2}

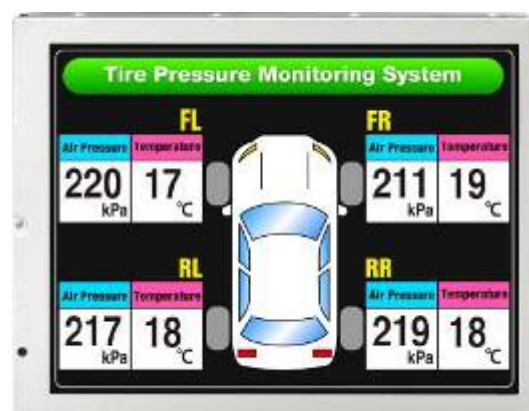

Pixel	640(H) x 480(V)
Display area	132.48(H) x 99.36(V)mm 6.5 inches (17cm)
Display color	16,777,216 colors/262,144 colors
Pixel pitch	0.207(H) x 0.207(V)mm
Luminance	1000cd/m ² (typ.)
Contrast ratio	800:1 (typ.)
Viewing angle ^{※3}	Up:80°, Down:80°, Left:80°, Right:80°
Response time ^{※4}	18ms (typ.)
Signal system	LVDS 1-port RGB 8-bit/6-bit
Power supply voltage	3.3V
Power consumption	3.8 W (typ.)
Operating temperature	-30°C to +80°C
Storage temperature	-30°C to +80°C
Polarizer surface	Clear
Module size	W 153.0 (typ.) x H 118.0 (typ.) x D 8.7 (max.) mm
Weight	150g (typ.)
Backlight	LED backlight (Replaceable)
LED driver	104PW03F

※1: ColorXcell Technology (Color Enhancement)

※1 70k hours long life LED

※2: Contrast ratio ≥ 10:1

※3: Ton+Toff (10%←→90%)

※All information is subject to change without notice.

※Screen images are simulated.

< NLT Technologies web site >

Japanese <http://www.nlt-technologies.co.jp/jp>

English <http://www.nlt-technologies.co.jp/en>

Last update:11/2015

©NLT Technologies,Ltd. 2011-2015