


NL6448BC20-35F

6.5" VGA
Industrial use
[Features]

- High luminance (1,000cd/m²)
- High contrast (800:1)
- 262K colors (CMOS RGB 6-bit)
- Wide temperature (-30°C to +80°C)
- Long-life LED backlight*¹

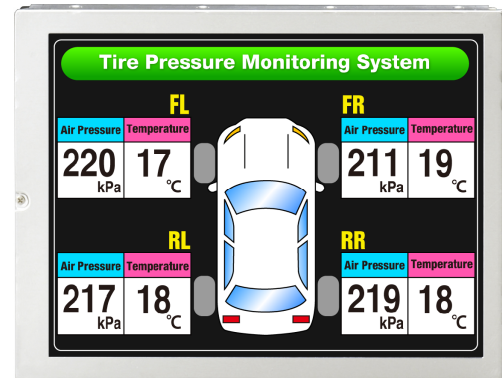

Pixel	640(H) x 480(V)
Display area	132.48(H) x 99.36(V)mm 6.5 inches (17cm)
Display color	262,144 colors
Pixel pitch	0.207(H) x 0.207(V) mm
Luminance	1,000cd/m ² (typ.)
Contrast ratio	800:1 (typ.)
Viewing angle * ²	Up: 80°, Down: 80°, Left: 80°, Right: 80°
Response time * ³	18ms (typ.)
Signal system	CMOS RGB 6-bit
Power supply voltage	3.3V/5.0V
Power consumption	3.9W (typ.)
Operating temperature	-30°C to +80°C
Storage temperature	-30°C to +80°C
Polarizer surface	Clear
Module size	W 153.0 (typ.) x H 118.0 (typ.) x D 8.7 (max.) mm
Weight	150g (typ.)
Backlight	LED backlight (Replaceable)
LED driver	104PW03F

*¹ 70k hours long life LED

*² Contrast ratio ≥ 10:1

*³ Ton+Toff (10%←→90%)

*All information is subject to change without notice.

*Screen images are simulated.

< NLT Technologies web site >

Japanese <http://www.nlt-technologies.co.jp/jp>

English <http://www.nlt-technologies.co.jp/en>