

RoHS Compliant
Directive 2011/65/EU

REFERENCE SPECIFICATION

Customer: _____

Item:	Crystal Unit
Type:	NX2520SA
Nominal frequency	16.000 MHz
Customer's Spec. No.:	---
NDK Spec. No.:	EXS00A-CS06042

For your reference we submit this specification.
Please study and keep in your related document file.

Charge:

Sales			Approved	M. Kubota
Engineer			Checked	---
			Drawn	M. Wada



Revision Record

Rev.	Rev. Date	Items	Contents	Remarks
---	06.Aug.2012	Issue	---	---


- 1.Customer specifications number : ---
- 2.NDK specification number : EXS00A-CS06042
- 3.Type : NX2520SA
- 4.Electrical characteristics
- 4.1 Nominal frequency : 16.000 MHz
- 4.2 Overtone order : Fundamental
- 4.3 Adjustment tolerance : $\pm 10 \times 10^{-6}$ max. (+25 °C)
- 4.4 Tolerance over the temperature range : $\pm 10 \times 10^{-6}$ max. (-20 to +70 °C)
The reference temperature shall be +25 °C.
- 4.5 Equivalent resistance (R_1) : 80 Ω max.
- 4.6 Insulation resistance : Terminal to terminal insulation resistance also terminal to cover insulation resistance must be 500M Ω (min) when DC100V \pm 15V is applied.
- 4.7 Maximum drive level : 200 μ W
5. Measurement circuit
- 5.1 Frequency measurement
- Measuring instrument : π network
- Load capacitance(C_L) : 8pF
- Level of drive : 10 μ W
- 5.2 Equivalent resistance measurement
- Measuring instrument : π network
- Load capacitance(C_L) : Series
- Level of drive : 10 μ W
6. Other performances
- 6.1 Operating Temperature range : -20 to +70°C
- 6.2 Storage temperature range : -40 to +85°C
- 6.3 Air-tightness : Less than 1.1×10^{-9} Pa m³/s (Helium leak detector)
7. Examination results document
- Since a performance is guaranteed, an examination results document does not submit.
8. Application drawing
- 8.1 External dimension : EXD14B-00420
- 8.2 Taping and reel figure : EXK17B-00161
- 8.3 Holder marking : EXH11B-00317
- 8.4 Reliability assurance Item : EXS30B-00249

9. Notice


Order items are manufactured according to specification. As to conditions, which are not indicated in the specification and unpredictable such as applied condition and oscillation margin, please check them beforehand.

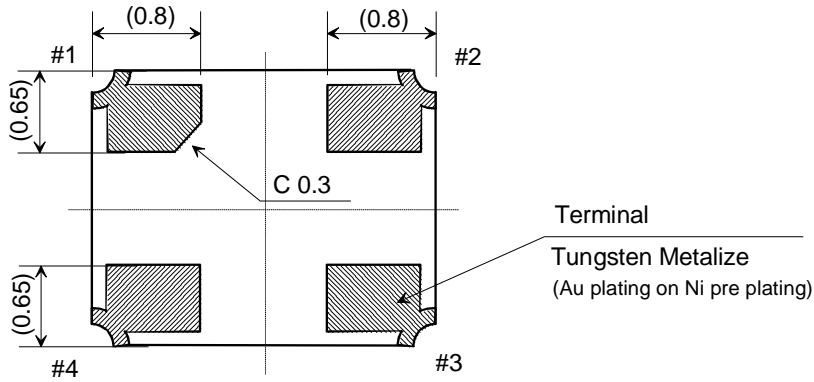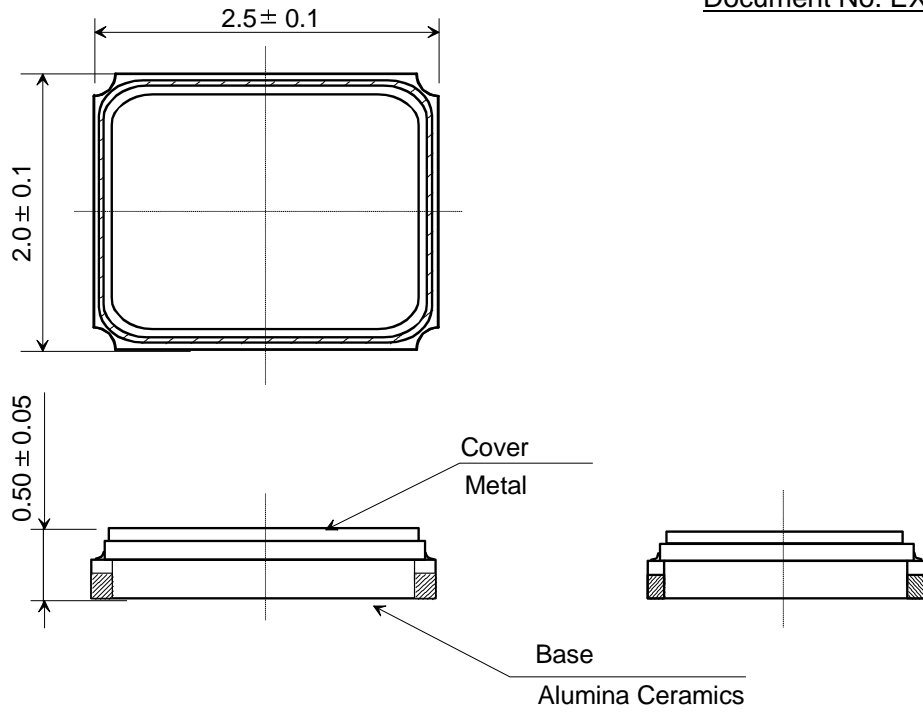

LAND PATTERN (TYPICAL)

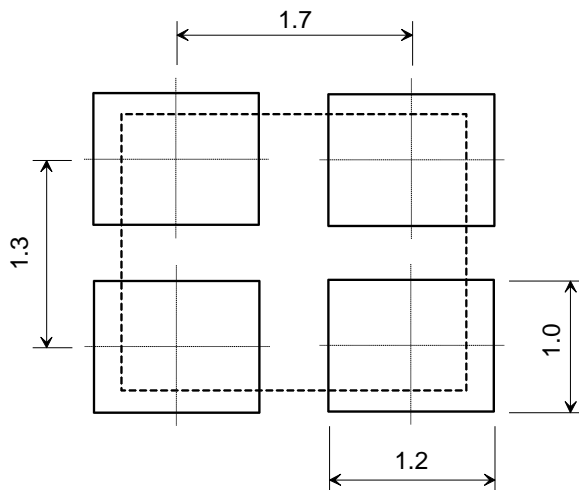




[TOP VIEW] PIN CONNECTION

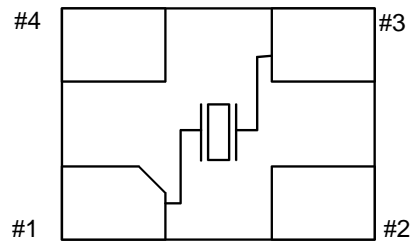

TERMINAL
#1,#3:X'tal
#2,#4:GND(CONNECTION COVER)


Date of Revise		Charge	Approved	Reason	
Drawn	30.Oct.2007	K.Sato	Third Angle Projection	Tolerance	Scale
Designed	30.Oct.2007	K.Sato	Dimension:mm	---	- / -
Checked	---	---	Title	Drawing No.	Rev.
Approved	30.Oct.2007	K.Kubota			
			NX2520SA Dimension Drawing		EXD14B-00420

NIHON DEMPA KOGYO CO., LTD.

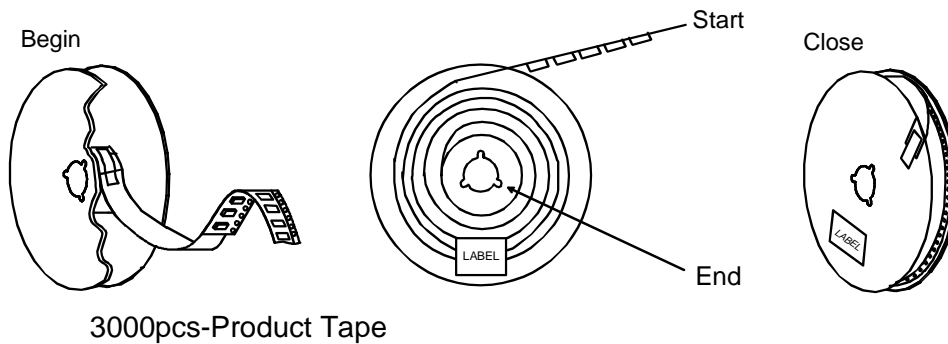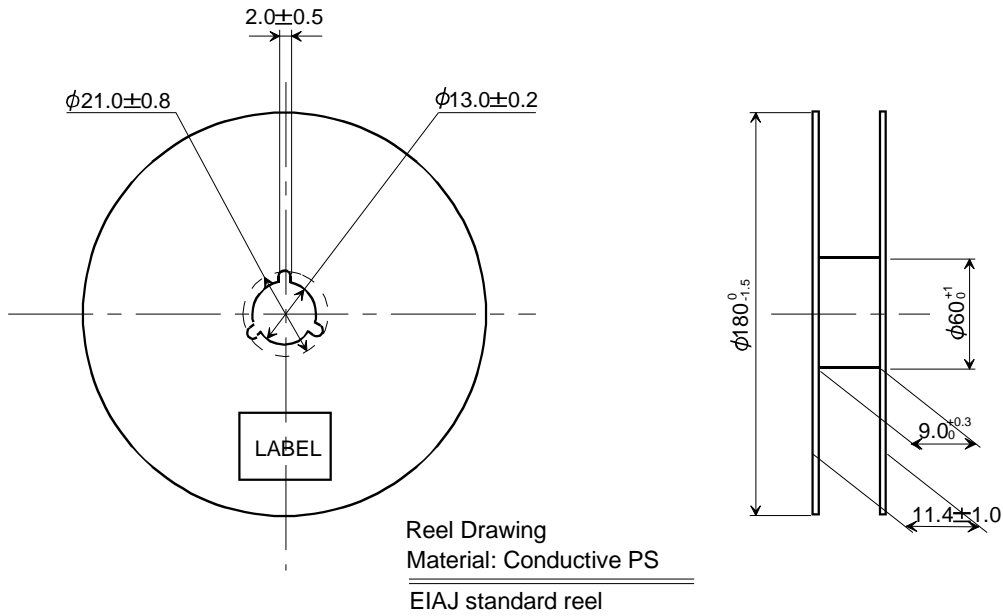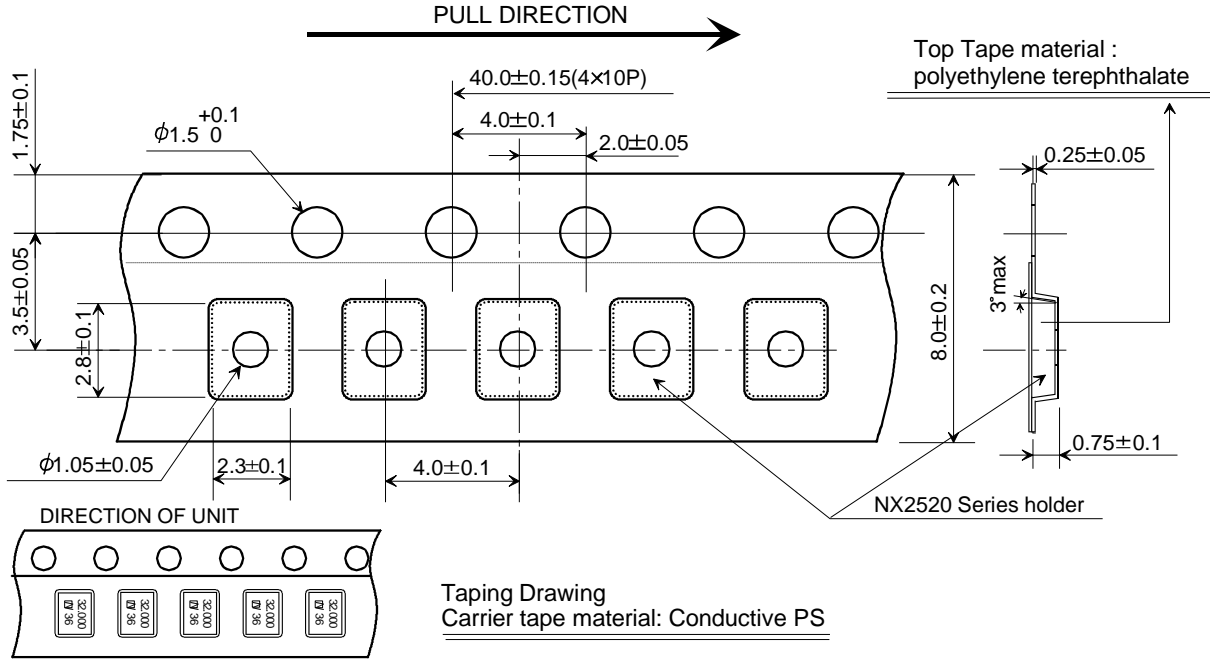

	Date of Revise	Charge	Approved	Reason	
B	14. Mar. 2008	Wada	Kubota	Changed drawing title	
	Date	Name	Third Angle Projection	Tolerance	
Drawn	19. Jun. 2003	H. Yagishita	Dimension: mm	----	
Designed	19. Jun. 2003	H. Yagishita	Title NX2520 Series Taping and Reel Spec.	Drawing No. EXK17B-00161	
Checked	19. Jun. 2003	K. Kubota			Rev. B
Approved	19. Jun. 2003	T. Ishii			

NIHON DEMPA KOGYO CO., LTD.

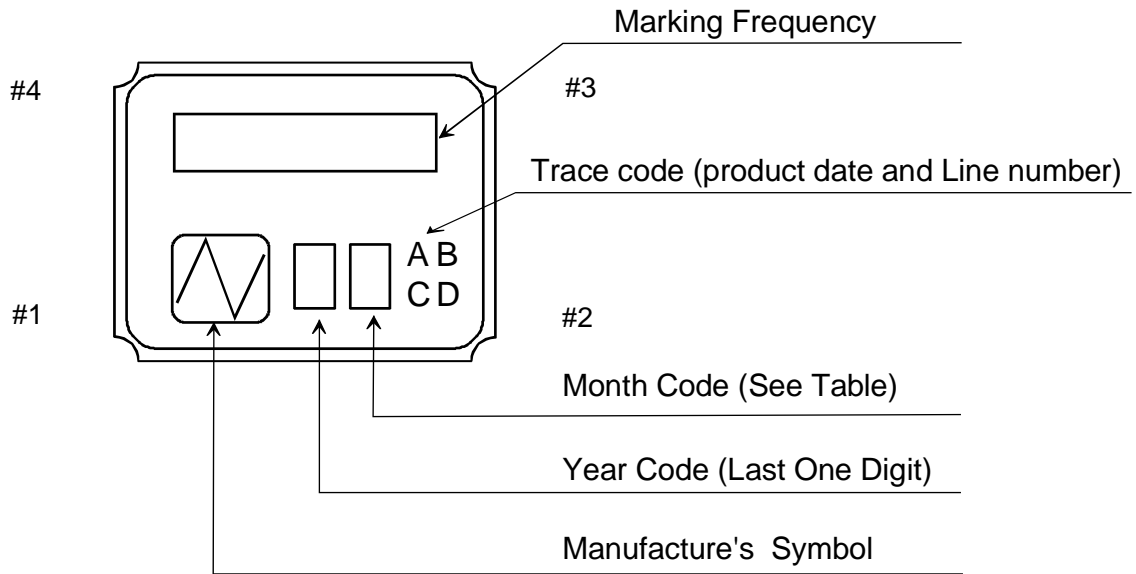

NOTE

1. Frequency Code

Marking Frequency is consist of five digits, first five digits of Nominal Frequency

Example

Nominal Frequency	28.636363 MHz
Frequency Code	28.636

2. Month Code Table

Month	1 Jan.	2 Feb.	3 Mar.	4 Apr.	5 May.	6 Jun.	7 Jul.	8 Aug.	9 Sep.	10 Oct.	11 Nov.	12 Dec.
Month Code	1	2	3	4	5	6	7	8	9	X	Y	Z

*Marking digits are not include a decimal point and dot mark.

	Date of Revise	Charge	Approved	Reason	
B	10.July.2008	Miyahara	K.Kubota	Delete application period.	
	Date	Name	Third Angle Projection	Tolerance	Scale
Drawn	16.Jan.2006	I.Miyahara	Dimension:mm		/
Designed	16.Jan.2006	I.Miyahara	Title	Drawing No.	Rev.
Checked	16.Jan.2006	---	Crystal Holder Marking	EXH11B-00317	B
Approved	16.Jan.2006	K.Okamoto			

NIHON DEMPA KOGYO CO., LTD.

Reliability assurance item

(page: 1/1)

No.	Test Item	Test Methods	Specification Code
1	High Temperature Storage *1	+85±3°C 720h	A
2	Low Temperature Storage	-40±3°C 500h	A
3	Temperature Humidity	+60±3°C 90~95%RH 500h	A
4	Temperature Cycling *1	-40±3°C / +85±3°C It is 500 cycles using 30 minutes each as 1 cycle.	A
5	Vibration	Frequency Range : 10~55Hz Amplitude : 1.52mm 1 cycle : 1 minutes Test time : Three mutually perpendicular axes each 2 hours.	A
6	Shock	Devices are shocked to half sine wave (981m/s ²) three mutually perpendicular axis each 3 times.	A
7	Drop	Devices are dropped from the height 75cm onto wooden block. (more than 30mm thickness.) Execution 3 times random drops	A
8	Solderability	Pre-heat temperature : +150±10°C Pre-heat time : 60~120s When the temperature of the specimen is reached at +215±3°C, it shall be left for 30±1sec. Peak temperature 240±5°C Material: Pb-free (Sn-3.0Ag-0.5Cu) Flux : Rosin resin methyl alcohol solvent (1 : 4)	B
9	Reflow resistance	Pre-heat temperature : +150~180°C Pre-heat time : 90±30s Heat temperature : more than +230°C Pre-heat time : less than 30s Peak temperature : +260±5°C Peak time : less than 10s	A

***1. High Temperature Storage and Temperature Cycling**

In case of customer spec on High temperature exceed +85°C, Low temperature exceed -40°C, above test according to customer spec high or low temperature will be perform and guarantee.

Specification code	Specification
A	$\Delta f/f \leq \pm 5$ ppm $\Delta CI/CI \leq \pm 15$ % or 5 Ω make use larger value
B	The electrodes should be covered by a new solder at least 90% of immersed area.