

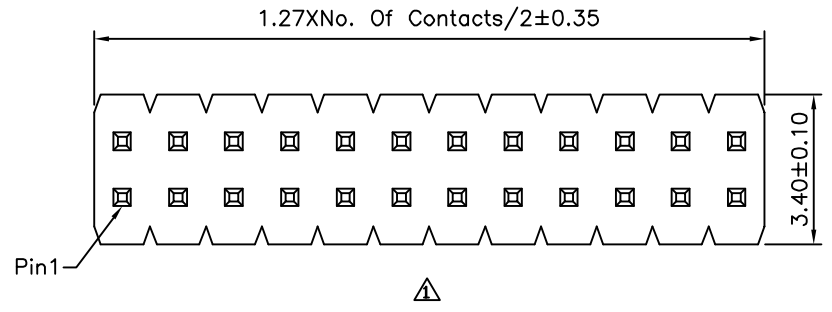


Recommended P.C.B. Layout

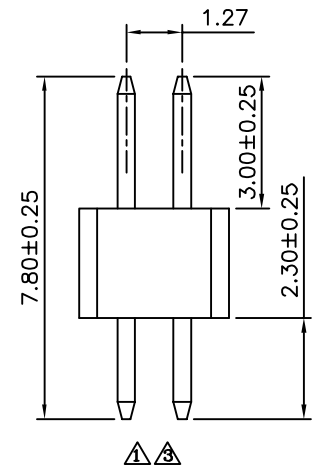

△

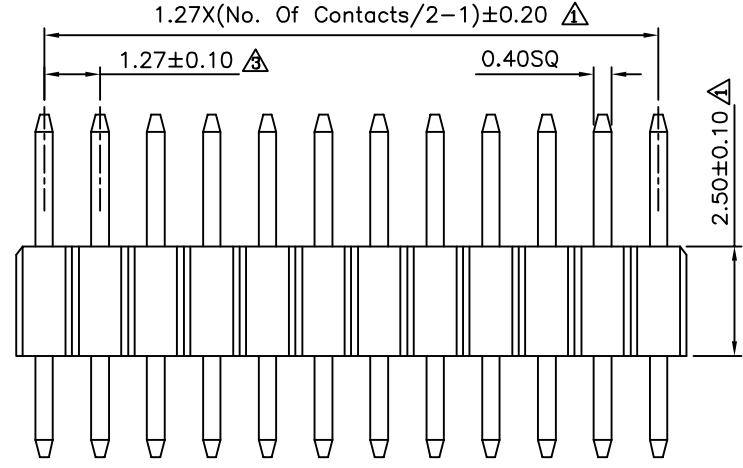

△ △

△ SPECIFICATION

- Current:1A
- Dielectric Strength:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:5000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- △ △ Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:04~100 Contacts
- RoHS Compliant

△ PA D 25 - 2 X XX - H H  
 (1) (2) (3) (4) (5) (6) (7)

- (1) PA:1.27X1.27 Pin Header
- (2) D:DIP Straight
- (3) 25:2.5mm Insulator Height
- (4) 2:Dual Row
- (5) XX:No. Of Position/Per Row
- (6) H:Withstand High Temperature Soldering
- (7) H:RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
PART No. △ PAD25-2XXX-HH		EMILY		
DRAWING No. PAD25-2XXX-HH		CHECKED BY HZF		
SCALE NONE		DRAWING BY HAO		
REV.	B3	UNIT mm		

NO. REV.	REVISIONS	CHK	DATE
△ B3	Modify Data	HZF	09/15/2014
△ B2	Modify Data	HZF	07/16/2012
△ B1	Modify P/N: PAD25-2XXXG-H --> PAD25-2XXX-HH	HZF	10/18/2010
△ B0	NEW RELEASE	HZF	09/07/2006