

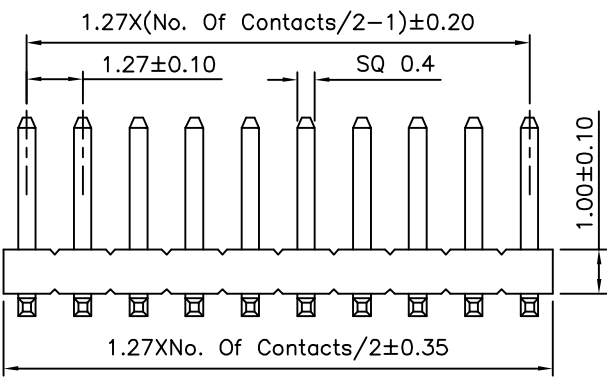


Recommended P.C.B. Layout

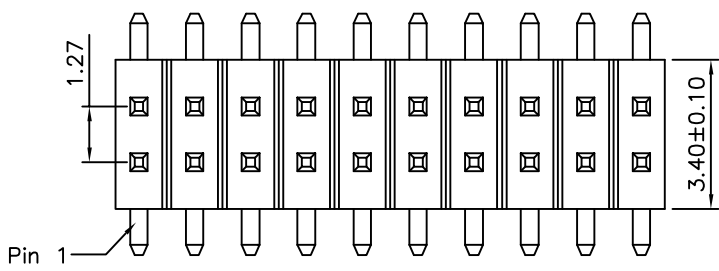

SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

PA V X 15 - 2 X XX - H
 (1) (2) (3) (4) (5) (6) (7)

- (1) PA:1.27X1.27 Pin Header
- (2) V:SMT Straight
- (3) X:Without Post
- (4) 15:SMT Height 1.5mm
- (5) 2: Dual Row
- (6) XX:No. Of Position/Per Row
- (7) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|------------------------------|------|-------------------|----|--|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5° |
| PART No. PAVX15-2XXX-H | | EMILY | | |
| DRAWING No. PAVX15-2XXX-H | | CHECKED BY HZF | | |
| SCALE | | DRAWING BY GAO | | |
| SCALE | NONE | REV. | CO | UNIT mm |

| | | | | | |
|-----|------|----|-------------|-----|------------|
| NO. | REV. | CO | NEW RELEASE | HZF | 04/17/2013 |
| | | | REVISIONS | CHK | DATE |