




REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

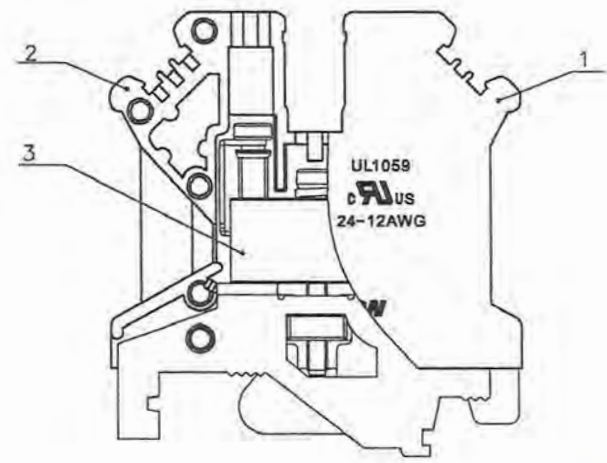

PC2.5-PE-01P-1Y-00AH
PC2.5-PE - series
 1 - single-row
 Y - color of housing (yellow-green color)
 00AH - no value

Rated surge voltage 1000 volts

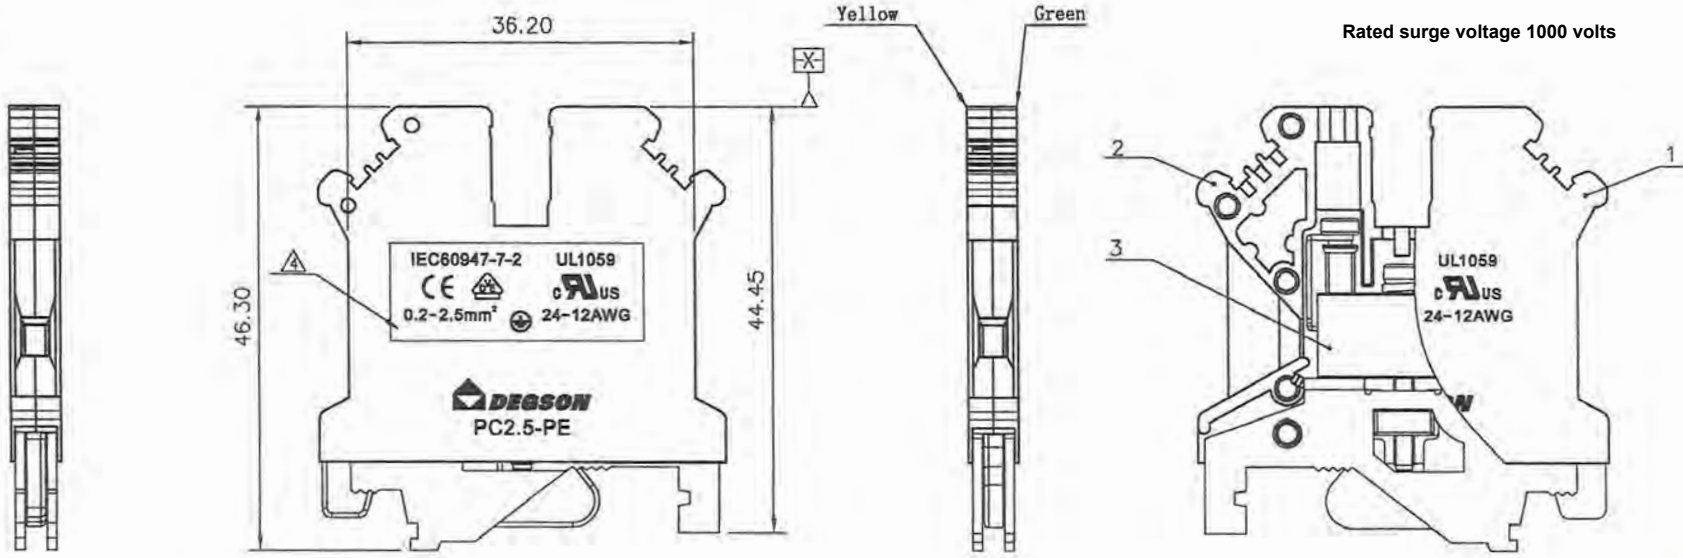

NOTES1:

- UL Standard**
 1. Torque value : M3 , 4.43Lb.in
 2. Wire range : 24~12AWG

IEC Standard

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

2. Torque value : M3 , 0.5N·m
 3. Wire range : 0.2~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.20mm, Poles : N=01P
 3. Stripping length : 9~10mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							0.1/10
TO 6	Over 6 TO 10	Over 10 TO 24	Over 24 TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6. RoHS Compliance

查复中心
 2016.10.21
 (收限片字发后, 对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
3	PC2.5-PE-Ground contact		
2	PC2.5-PE-Housing	PA66	UL94V-0
1	PC2.5-PE-Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: <i>Alan 10/18/16"</i>	NAME: PC2.5-PE-01P-1Y-00A(H)		
	CHKD: <i>ZYK 10/18/16"</i>	TITLE: CUSTOMER DRAWING		
	DRFT: <i>LM 11/16/05"</i>	REV TO		
THIRD ANGLE PROJECTION		DRAWING NO.: PC2.5-PE-C01		SHEET 1/1
DO NOT SCALE DRAWING		SCALE		1:1