

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

- UL Standard
 1.Torque value : M3 , 4.43Lb.in
 2.Wire range : 24~10AWG

IEC Standard

- 1.
- | | |
|--------------------------|-------|
| Pollution degree | 3 |
| Overvoltage category | III |
| Rate impulse voltage(KV) | 8.0KV |
- 2.Torque value : M3 , 0.5N·m
 3.Wire range : 0.2~4mm²

NOTES2:




- 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 6.20mm, Poles : N=01P
 3.Stripping length : 7~8mm
 4.Operating temperature: -40°C~+105°C
 5.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm						0.1/10	
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6.RoHS Compliance

PC4-PE - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

Rated surge voltage 1000 volts

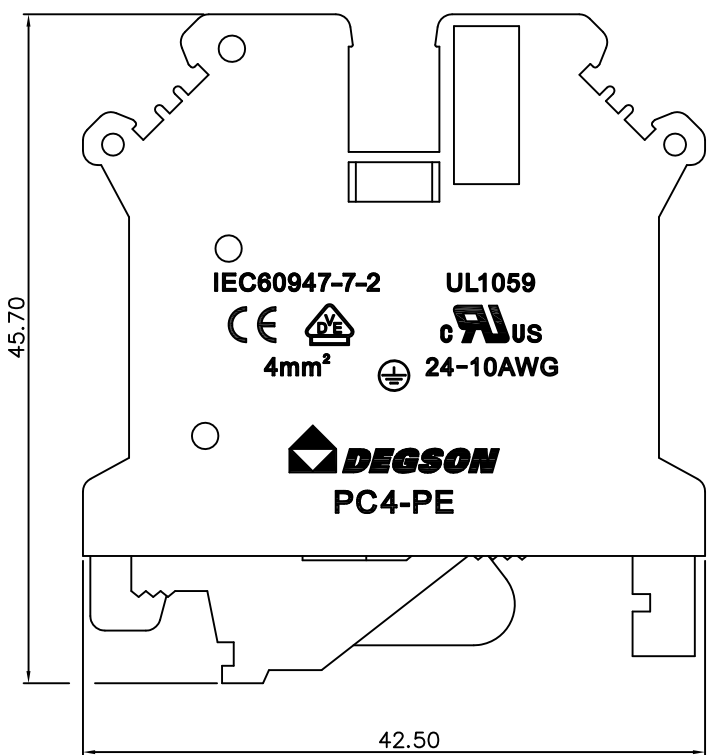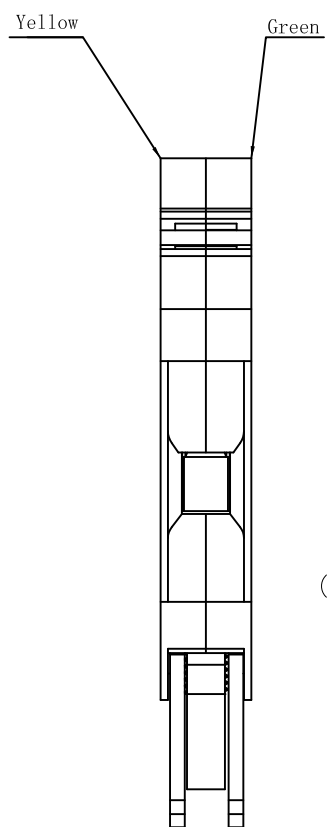

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
		<p>THIRD ANGLE PROJECTION</p>			
		DRAWING NO.:	/	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

PC4-PE-01P-1Y-00A(H)

TITLE: CUSTOMER DRAWING REV DO