

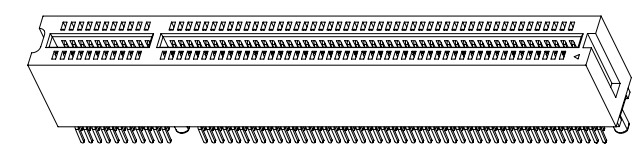
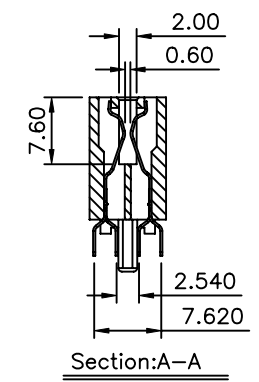

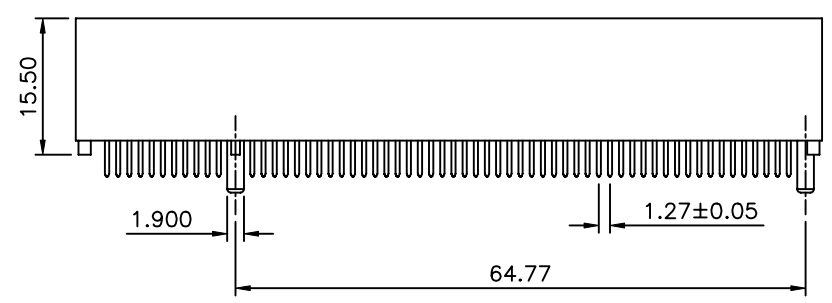


△ SPECIFICATION
 Voltage Rating:250V
 Current Rating:1A
 Contact Resistance Terminal:30 Milliohms Max.
 Dielectric Withstanding Voltage:500V AC/Min
 Insulation Resistance:1000 Megaohms Min.
 Housing:Nylon66, UL94V-0
 Contact:Brass
 Plating:Mating Area:Selective Gold Over Nickel
 Solder Area:Tin Over Nickel
 RoHS Compliant

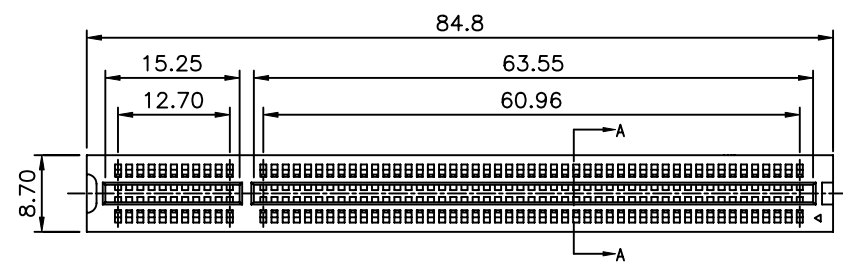

△ AUK P/N	Plated
PCI120D-H	Gold Flash
PCI120D-S15-H	15u"
PCI120D-S30-H	30u"

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.±0.20 .X±0.15 .XX±0.10 .XXX±0.05				
PART No. △ PCI120D-SXX-H		MEI			△ B3	Modify Dim.	HZF	04/14/2009
DRAWING No. PCI120D-SXX-H		CHECKED BY HZF			△ B2	Modify P/N: PCI120D-H → PCI120D-SXX-H	HZF	04/13/2009
SCALE NONE		DRAWING BY XYH			△ B1	Modify Specifications	HZF	10/15/2008
REV.	B3	UNIT mm	⊕	△ B0	NEW RELEASE	HZF	06/27/2007	
NO.	REV.	REVISIONS		CHK	DATE			