REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A	10-0641	增加UL刻字	COCO	06/27/10

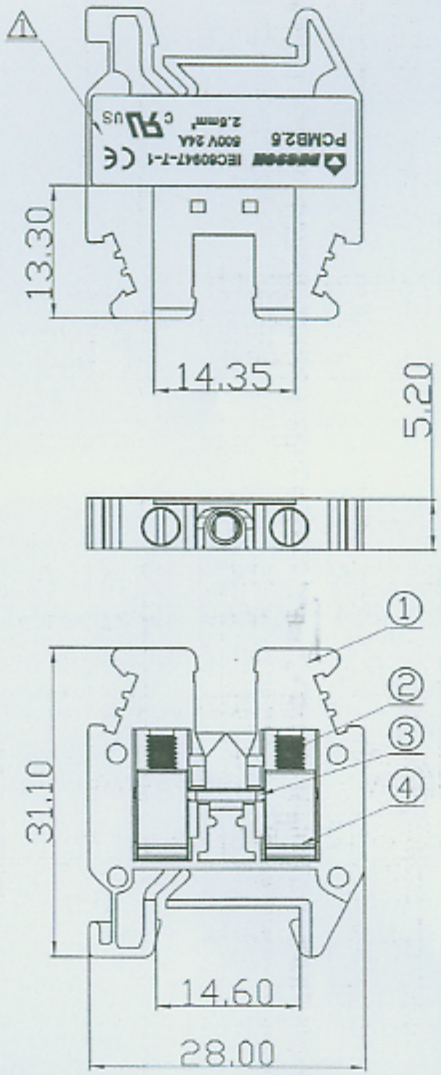

Notes:

1. Rated voltage/current: UL 300V/20A
   IEC 500V/24A
2. Operation temperatures: -40℃～+105℃
3. Withstanding Voltage: AC2500V/1Min
4. Insulation Resistance: 5000MΩ/DC1000V
5. Wire Range: 28～12AWG, 2.5mm²
6. Max. Torque Value: M3, 5.0kgf.cm
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.5

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	PCMB2.5-Housing	6074A0Y01A(H)	1	PA66	UL94V-0
4	PC2.5-Brass Cage	X000000880(H)	2	Brass	Ni Plated
3	PCMB2.5 Current Carrier	6074B00010(H)	1	Copper	SnCu Plated
2	PC2.5B M3"-"Screw	S000001100(H)	2	Brass	Ni Plated

DETAILED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ±	±
.00 ±	±
.000 ±	±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTD ZYH	DATE 08/03/09	
CHKD	DATE 8-7-10	
MFD	DATE	
APPVL	DATE 8/8/10	
MATERIAL :		
G.E :		
FINISH:		
SCALE : 1:1		

DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME PCMB2.5-01P-1Y-00A(H)

DRAWING NO. PCMB2.5-E01 /PART NO.

SIZE A4 REV 11 08/01/10

DO NOT SCALE DRAWING SHEET 1 OF 1

宁波高正电子有限公司 2010.6.09 文管中心

1