

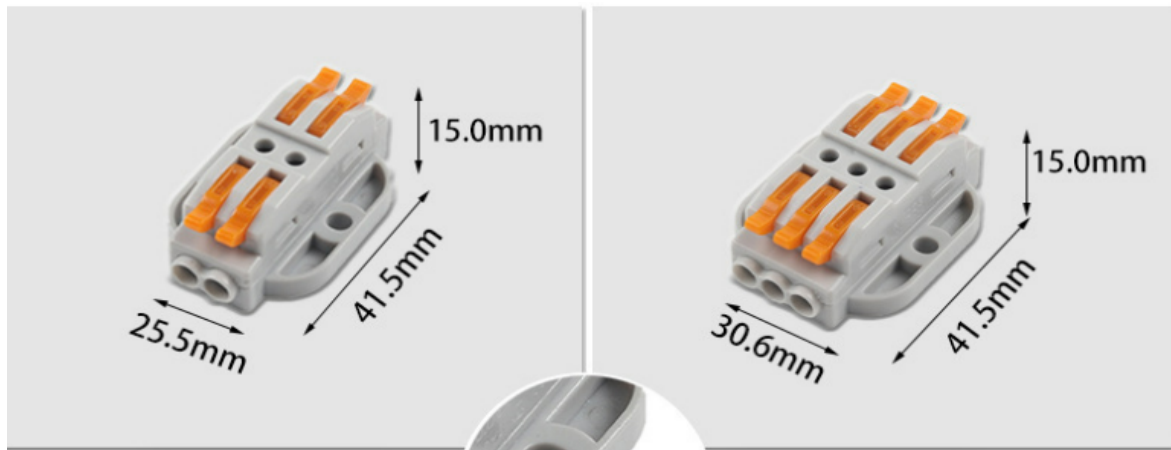


版次	修订描述	制图/日期
AO	新版发行	CHEN 2020/11/26

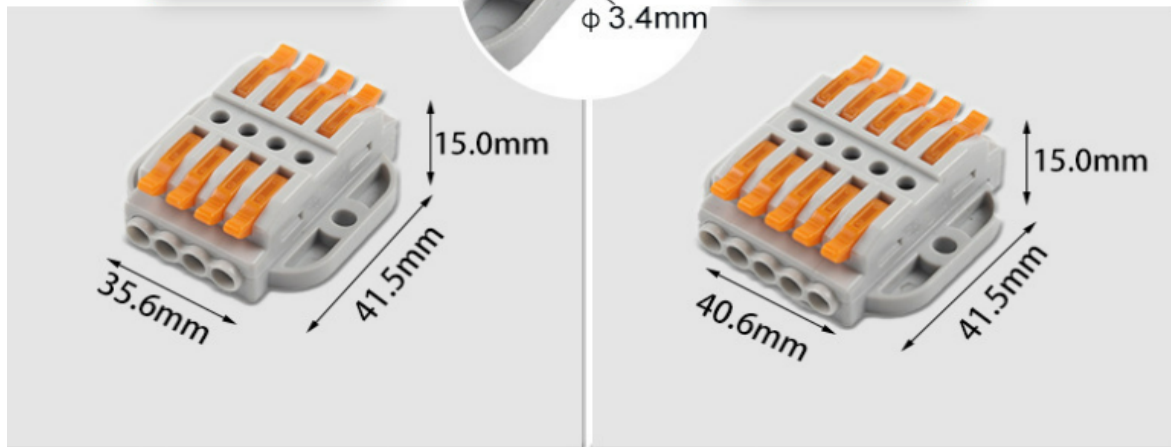

**PCT-22-2**

**PCT-22-3**



**PCT-22-4**

**PCT-22-5**

**Technical:**

Voltage:250V 32A

Withstand Volotage: AC 4000V/1 min

Stripping length: 0.08-4Sq.mm

Working temperature: -40°C+80°

Material: Brass+ PA 66

**Part No.:** PCT-22-2  
**PCT-22 - series of push wire connector (terminal)**  
**2 - number of Pins (2 pins)**  
**Housing material: PA66**  
**Material of Pins: Brass**  
**Wire cross-section range: 0.08 - 4.0 sq.mm**

**Factory: Xiamen Fucon IMP.&EXP. CO.,LTD**

未注尺寸公差参照				投影 类型		单位	mm	制图	CHEN	料号	PCT-22	FUCON
X.	±0.35	X.XX	±0.20			X.°	±5°	比例	1:1	审核		
X.X	±0.30	X.XXX	±0.10	X.X°	±2°	图号		核准				