
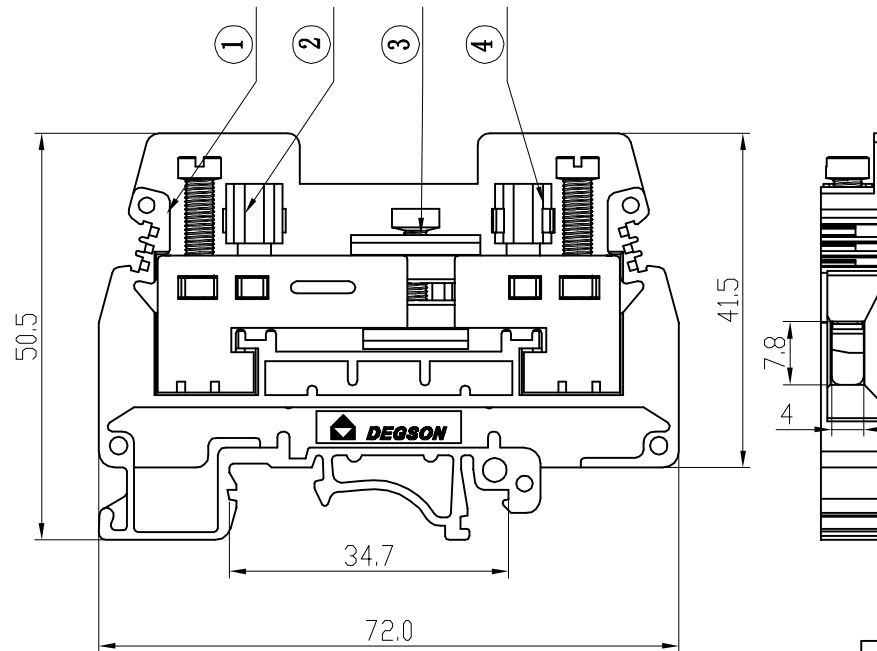



REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		图面整理	Apple	04/07/08*	

Notes:

- Rated voltage/current: UL1059 300V/50A
IEC 450V/41A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC3000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 26~10AWG, 6mm²
- Max. Torque Value: M4.0, 12.24Kgf.cm
- Undimensioned Tolerances:

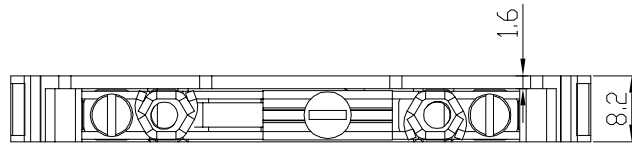

Pitch range in mm		Nominal dimension range in mm				—	
to	over	to	over	to	over	to	over
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

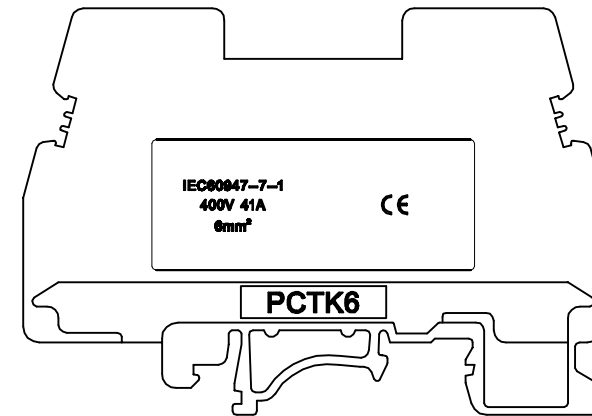

PCTK6-01P-1Y-00AH
PCTK6 - series
1 - single-row
Y - color of housing (1 - grey color)
00AH - no value

2	PCTK6-Right Hardware	6127B00030 (H)	1	Brass	Ni Plated
2	PCTK6-Contact Hardware	6127B00020 (H)	1	Brass	Ni Plated
2	PCTK6-Left Hardware	6127B00010 (H)	1	Brass	Ni Plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	PCTK6-Housing	6127A0Y01A (H)	1	PA66	UL94V-0
TOLERANCES EXCEPT AS NOTED MM (INCH) .0 ± .00 ± .000 ±		DFTD Apple CHKD MFD APPVL		DATE 02/27/08* DATE DATE DATE	
ANGLES ± 1° THIRD ANGLE PROJECTION		G.E. FINISH: SCALE : 1:1		 宁波高正电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD. NAME PCTK6-01P-1Y-00A (H)	
DRAWING NO. PCTK6-E01				SIZE A3	REV T1 04/07/08*
DO NOT SCALE DRAWING				SHEET 1	OF 1