

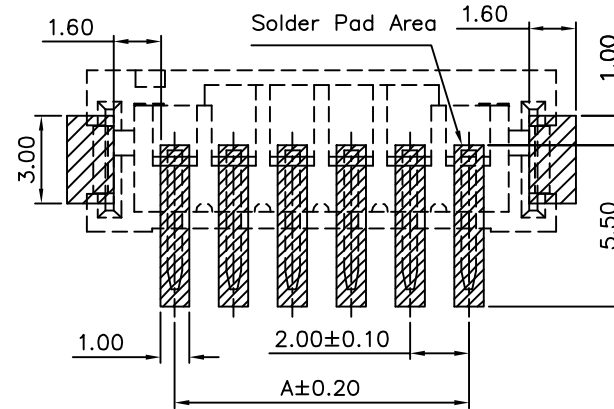
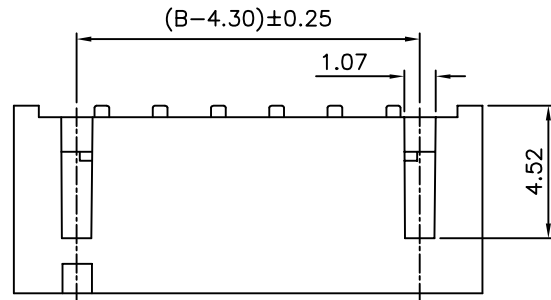


△ SPECIFICATION

Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 Temperature Range: -25°C~+85°C
 Insulator: PA9T(UL94V-0),Nature
 Pin: Brass, Matte Tin Plated Over Nickel
 Latch: Brass, Matte Tin Plated Over Nickel
 RoHS Compliant

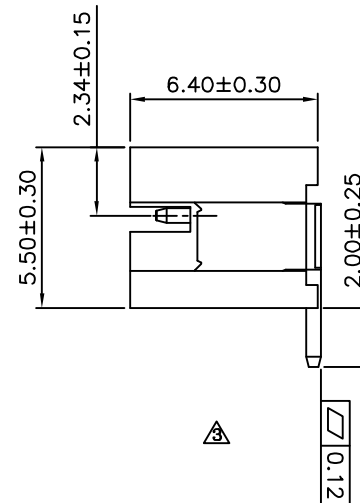


Recommended P.C.B Layout(Top Side)
 P.C.B Thickness=1.20~1.60mm(Tolerance=±0.05) △

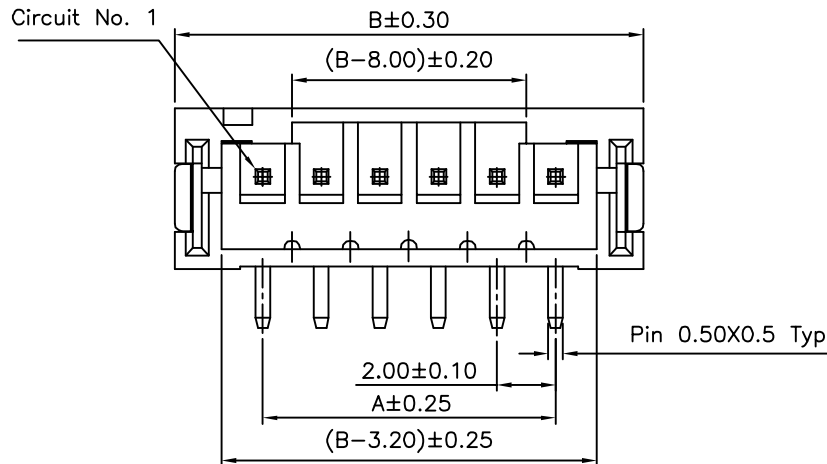

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED		△ B3	Modify Data	HZF	10/10/2013
PART No. PHXXV-R1K-H		CHECKED BY HZF		TOLERANCES ARE		△ B2	Modify Data	HZF	11/19/2012
DRAWING No. PHXXV-R1K-H		DRAWING BY SONG		.X ±0.25 .XX ±0.20 .X* ±2* .XXX ±0.10 .XX* ±1*		△ B1	Modify Data	HZF	05/16/2011
SCALE NONE		REV. B3		UNIT mm		△ B0	Modify P/N: PHXXV-R5H-H --> PHXXV-R1K-H	HZF	09/12/2010
						△ B0	NEW RELEASE	HZF	09/12/2010
						NO. REV.	REVISIONS	CHK	DATE

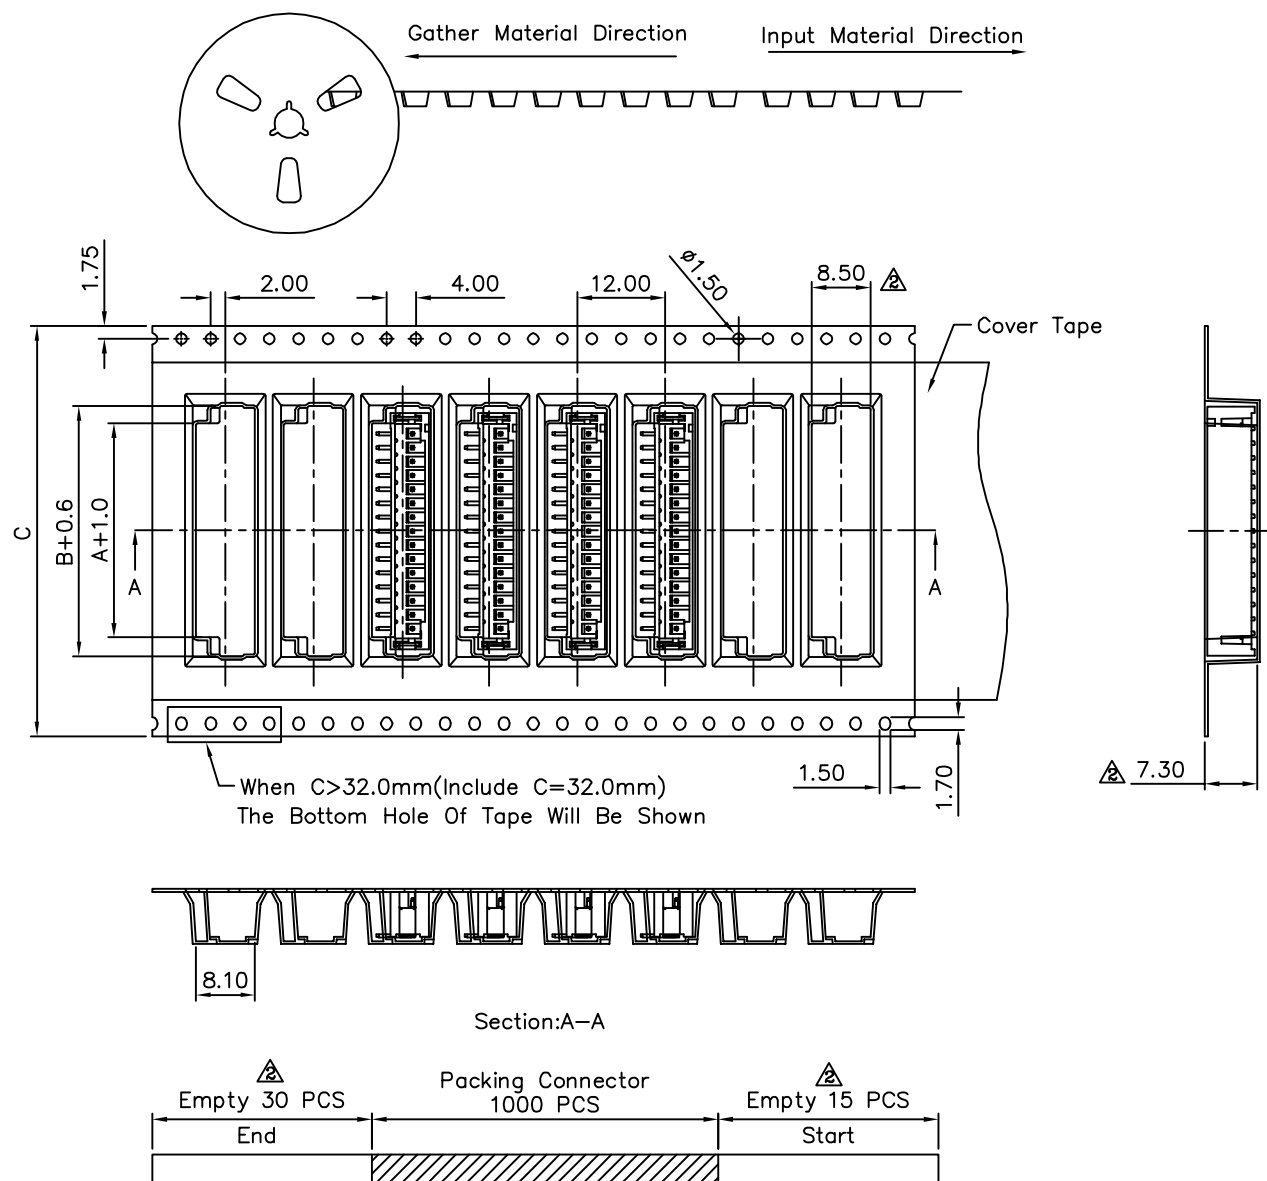

2 SPECIFICATION

Peel Strength Of Cover Tape:30~130g
Peeling Speed:250~300mm/Minute
Peeling Angle:165°~175°
Q'ty:1000 PCS/Reel
RoHS Compliant

Pin	A	B	C
2	2.00	8.00	24.0
3	4.00	10.00	
4	6.00	12.00	
5	8.00	14.00	32.0
6	10.00	16.00	
7	12.00	18.00	
8	14.00	20.00	44.0
9	16.00	22.00	
10	18.00	24.00	
11	20.00	26.00	56.0
12	22.00	28.00	
13	24.00	30.00	
14	26.00	32.00	68.0
15	28.00	34.00	
16	30.00	36.00	