


SPECIFICATION
 Rating:DC 30V,0.5A
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.(250V DC)
 Withstand Voltage:500V AC
 Insertion And Extraction Force:3~20N
 Life Test:5000 Cycles
 RoHS Compliant

- PJ W D XX X 13 120 - R1K - H
 (1)(2)(3)(4) (5) (6) (7) (8) (9)
- (1) PJ:3.5 Earphone Jack
 - (2) W:SMT Right Angle
 - (3) D:Dent Type
 - (4) XX:No. Of Position
 - (5) X:Without Post
 - (6) 13:1.3mm=Dest Height
 - (7) 120:12.0mm Total Length
 - (8) R1k:Tape & Reel 1000 PCS/Reel
 - (9) H:RoHS Compliant

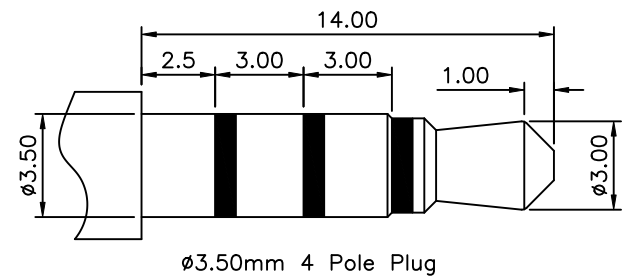

Recommended P.C.B. Layout(Top View)

Model No.	PJWD06X13120-R1K-H	PJWD05X13120-R1K-H	PJWD04X13120-R1K-H	PJWD03X13120-R1K-H
Schematic				

No.	Description	Q'ty	Material	Remark
①	Contact Foot #1	1	Bronze	Gold Plated Over Nickel
②	Contact Foot #2	1	Bronze	Gold Plated Over Nickel
③	Contact Foot #3	1	Bronze	Gold Plated Over Nickel
④	Contact Foot #4	1	Bronze	Gold Plated Over Nickel
⑤	Contact Foot #5	1	Bronze	Gold Plated Over Nickel
⑥	Contact Foot #6	1	Bronze	Gold Plated Over Nickel
⑦	Housing	1	PA9T	--

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
PART No. PJWDXX13120-R1K-H	MEI	.X ±0.15
DRAWING No. PJWDXX13120-R1K-H	CHECKED BY HZF	.XX ±0.15
SCALE NONE	DRAWING BY CYP	ANG. ±1.5°
REV.	AO	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	03/10/2018
		REVISIONS		