


**Panel Mounting Series / PM..N series**



**PM6N**

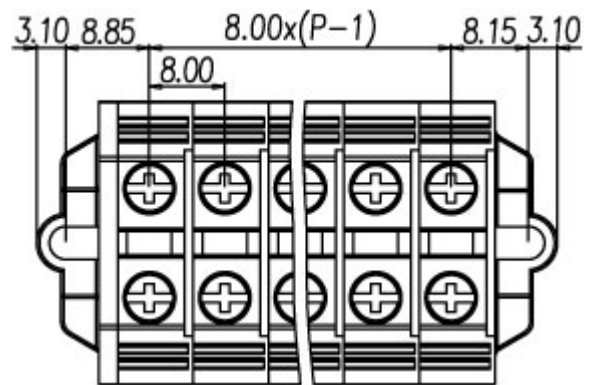

Approval		
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	65A	41A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	20~6 / 1.5~6	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	20~6 / 1.5~6	
Rated impulse withstand voltage	8KV	
Torque (N-m)	1.18	
Screw	M4	
Wire strip length	9~11mm	
Insulating material	PA	
TxHxW (mm)	8x29.8x30	
Optional color	Cat. No.	
	PM6N-XXP-OR	
	PM6N-XXP-YG	

	Accessories	Cat. No.
End cover		PM6NC
Insertion bridge	2 way	CSC-602S
	3 way	CSC-603S
	4 way	CSC-604S
	10 way	CSC-610S
Marking label		TM28
Tool		

	Pole	Cat. No.
	01P	PM6N-01P
	02P	PM6N-02P
	03P	PM6N-03P
	:	:
	12P	PM6N-12P

