
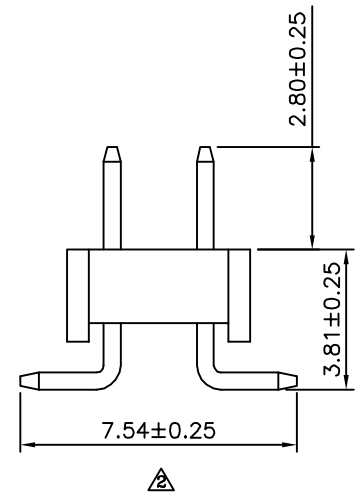


Recommended P.C.B. Layout

**△ SPECIFICATION**  
 Current:1A  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Dielectric Strength:1000V AC Minute  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 △ Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~100 Contacts  
 RoHS Compliant

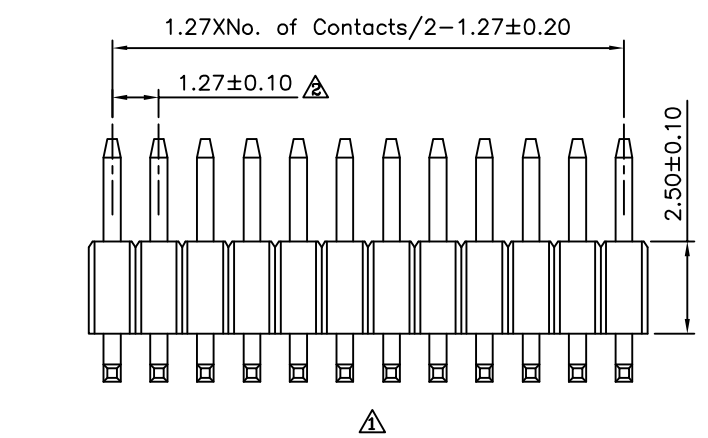

**△ P V X 38 - 2 X XX - H**  
 (1) (2) (3) (4) (5) (6) (7)

(1) P:1.27X2.54 Pin Header  
 (2) V:SMT Straight  
 (3) X:Without Post  
 (4) 38:SMT Height 3.81mm  
 (5) 2:Dual Row  
 (6) XX:No. Of Position/Per Row  
 (7) H:RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
PART No. PVX38-2XXX-H		CHECKED BY HZF		
DRAWING No. PVX38-2XXX-H		DRAWING BY SONG		
SCALE	NONE	REV.	B2	
UNIT mm		REV. B2		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	07/09/2014
△ B1		Modify P/N:PVX38-2XXXG-H --> PVX38-2XXX-H	HZF	01/06/2011
△ B0		NEW RELEASE	HZF	10/02/2009