
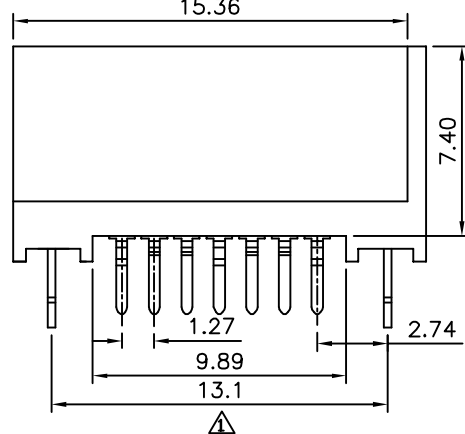
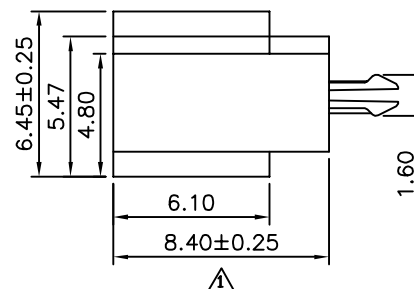
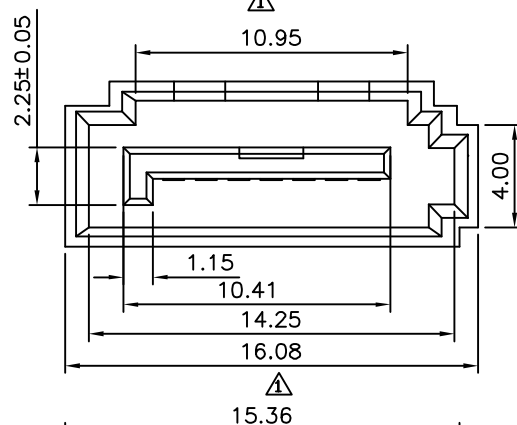
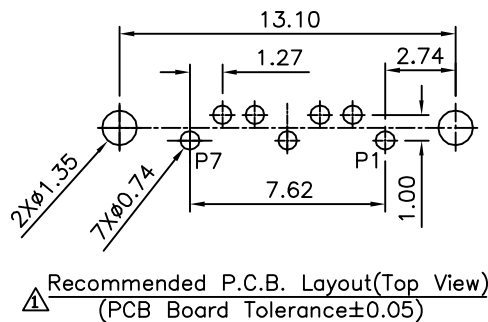


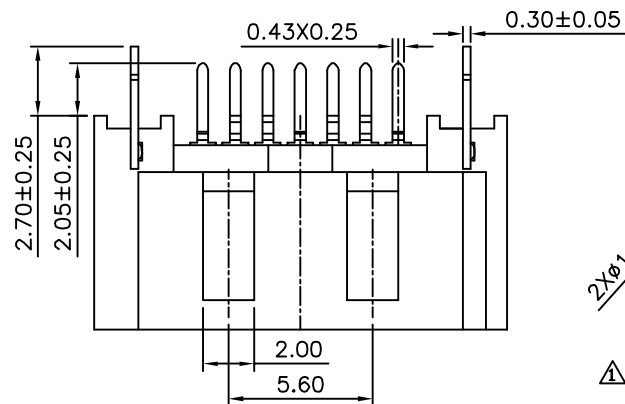

SPECIFICATION

- ⚠ Current Rating:1.5A
Operation Voltage:100V AC Max.
Dielectric Withstand Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Housing:LCP+30%G.F.(UL94V-0),Black
Contact:Brass
Boardlock:Brass,Tin Plated On Solder Tails,
Over Nickel
RoHS Compliant

- ⚠ SATA 07 PD Z - Q A - X - H H
(1) (2) (3) (4) (5) (6) (7) (8) (9)
(1) SATA:Serial ATA Series
(2) 07:No. Of Position
(3) PD:Male DIP Straight
(4) Z:With Boardlock
(5) Q:Box Type
(6) A:Parallel Type
(7) X:Contact Finish
Blank:Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel
3:Gold Plated 15u" On Contact Area,Tin
Plated On Solder Tails,Over Nickel
(8) H:Withstand High Temperature Soldering
(9) H:RoHS Compliant

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI	
PART No. SATA07PDZ-QA-X-HH		CHECKED BY HZF	
DRAWING No. SATA07PDZ-QA-X-HH		DRAWING BY CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X. ±0.25	△ X.* ±2°		
.X ±0.20	△ .X* ±1.5°		
.XX ±0.15	.XX* ±1°		
.XXX ±0.10	.XXX* ±0.5°		
UNIT mm			

NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	09/09/2015	A
△ A0	NEW RELEASE	HZF	11/25/2011	