



File No.	697GC07806	SHEET	1/1

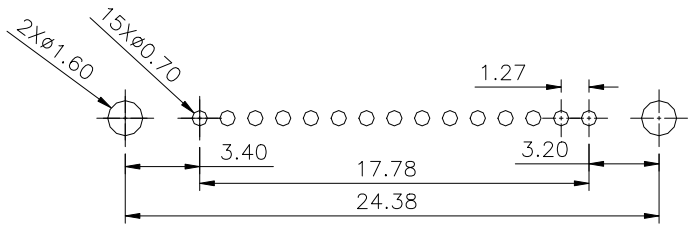


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

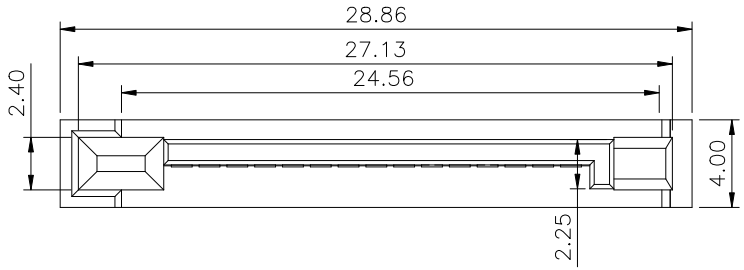

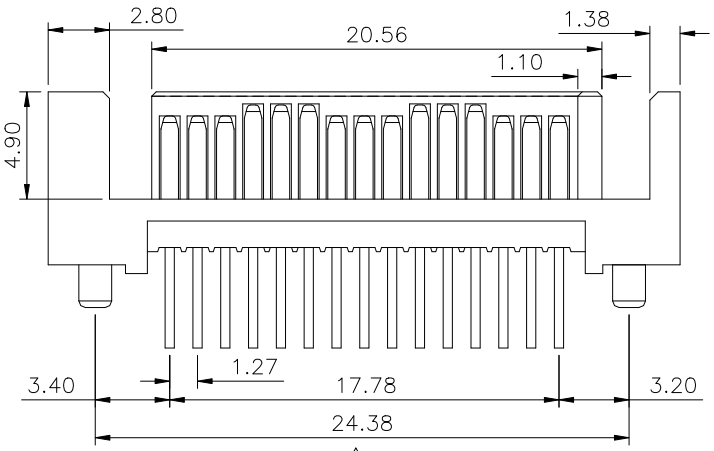



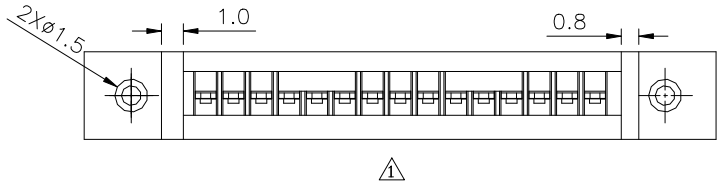

SPECIFICATION

Current Rating:1.5A
Withstand Voltage:500V AC
Operation Voltage:100V AC Max.
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−25°C~+85°C
Housing:LCP+30%G.F.(UL94V−0),Black
1 Contact:C2680R,Gold Plated On Contact Area
Tin Plated On Solder Tails,Over Nickel
RoHS Compliant

SATA	15	P	D	P	−	H	H
(1)	(2)	(3)	(4)	(5)		(6)	(7)

(1) SATA:Serial ATA Series
(2) 15:No. Of Position
(3) P:Male
(4) D:DIP Straight
(5) P:With Post
(6) H:Withstand High Temperature Soldering
(7) H:RoHS Compliant

AUK
A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No.	SATA15PDP−HH	CHECKED BY	HZF
DRAWING No.	SATA15PDP−HH	DRAWING BY	CYP
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.30 1 X.° ±2°
.X ±0.25 .X° ±1.5°
.XX ±0.20 .XX° ±1°
.XXX ±0.15 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	03/07/2016
0	A0	NEW RELEASE	HZF	08/19/2013