




File No. 692EH15217 SHEET 1/2 ⚠1

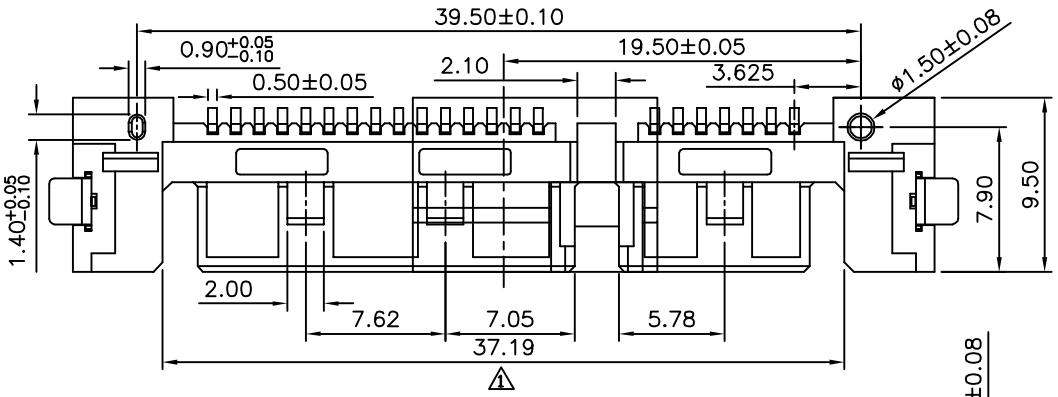


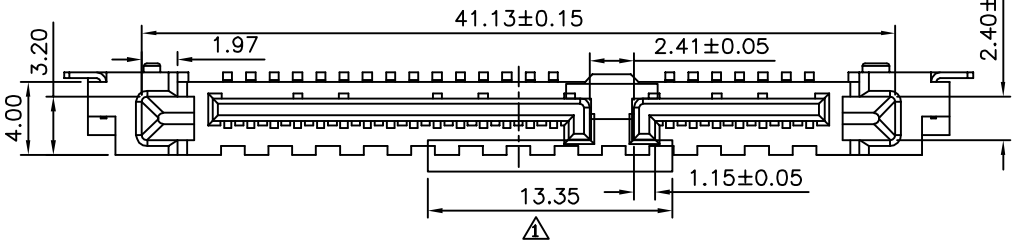

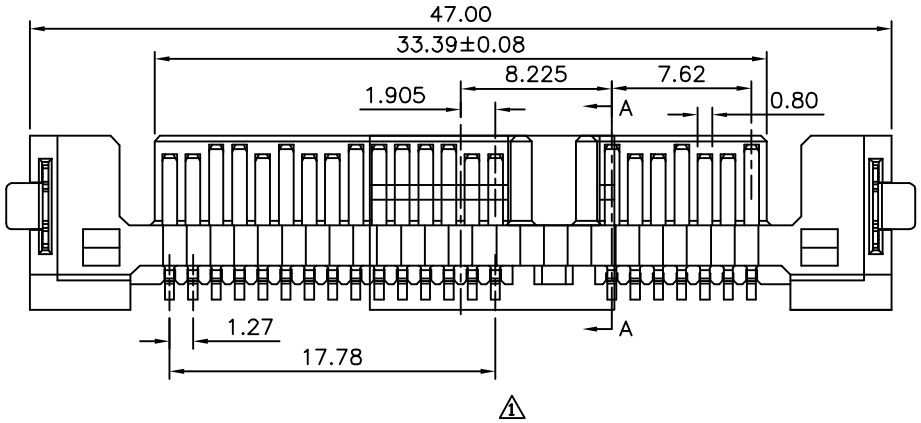


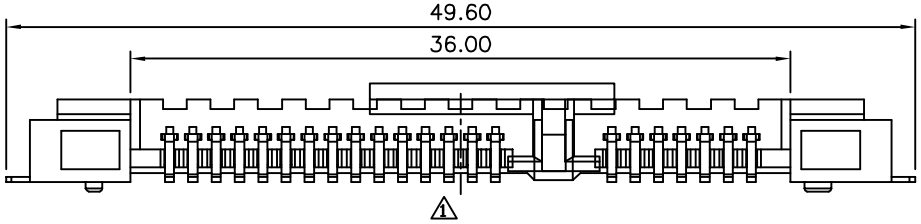





⚠1 Section A−A

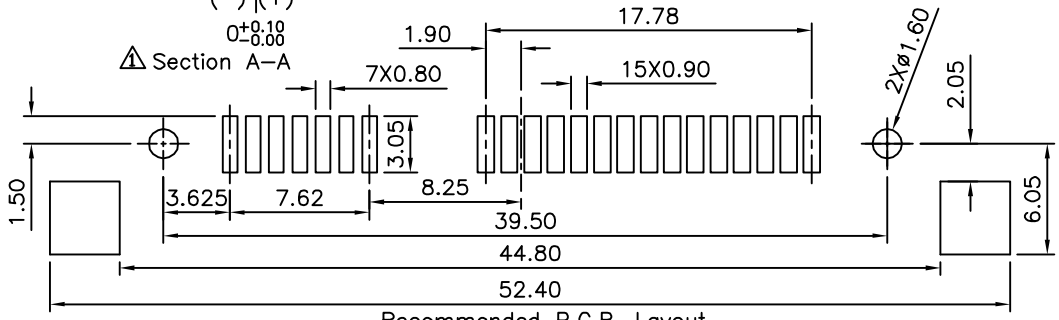

Recommended P.C.B. Layout

⚠1 SPECIFICATION

Current Rating:1.5 Ampere Per Contact
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Dielectric Withstanding Voltage:500V AC
Operation Temperature:−20°C~+85°C
Housing:LCP+30%G.F.(UL94V−0)
Contact:C2680R−H
Forklock:C2680R−H,Gold Plated Over Nickel
RoHS Compliant

⚠1 SATA (1) 22 (2) P (3) W (4) B (5) P (6) C (7) − X (8) − R8H5 (9) − H (10)

(1) SATA:Serial ATA Series
(2) 22:7+15 Pin
(3) P:Male
(4) W:SMT Right Angle
(5) B:Bottom Contact
(6) P:With Post
(7) C:With Cap
(8) X:Contact Finish
Blank:Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
3:Gold Plated 15u" On Contact Area,Tin Plated On Solder Tails,Over Nickel
(9) R8H5:Tape & Reel 850 PCS/Reel
(10) H:RoHS Compliant


A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.


CATEGORY		APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
PART No. ⚠1	SATA22PWBPC−X−R8H5−H	CHECKED BY	HZF	.X ±0.30	
DRAWING No.	SATA22PWBPC−X−R8H5−H	DRAWING BY	SONG	.XX ±0.25	
SCALE	NONE	REV.	A1	ANG. ±3°	
				UNIT mm	


NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify P/N:SATA22PWBP−SXX−H --> SATA22PWBPC−X−R8H5−H	HZF	08/15/2014
⚠0	A0	NEW RELEASE	HZF	01/28/2010


File No.	692EH15217	SHEET	2/2 ⚠1


SPECIFICATION
Q'ty:850 PCS/Reel
RoHS Compliant

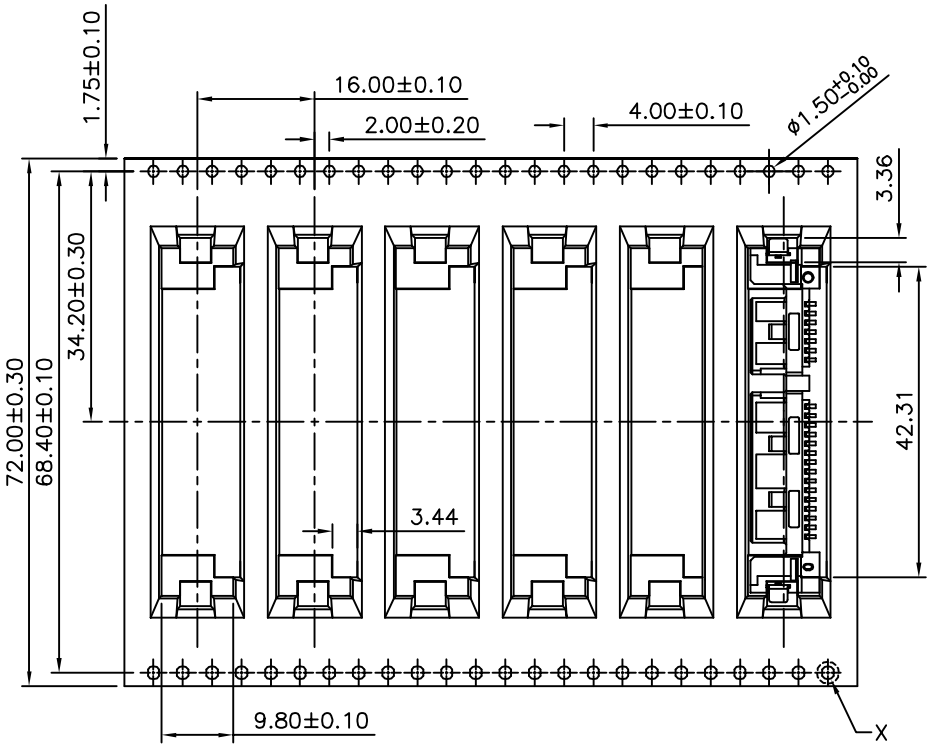


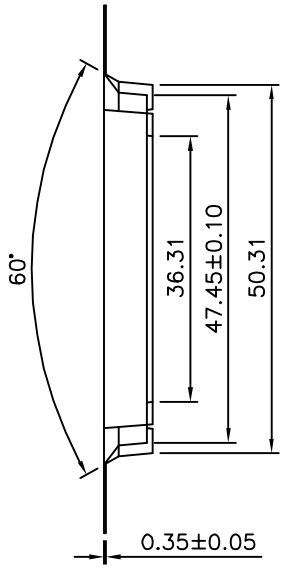


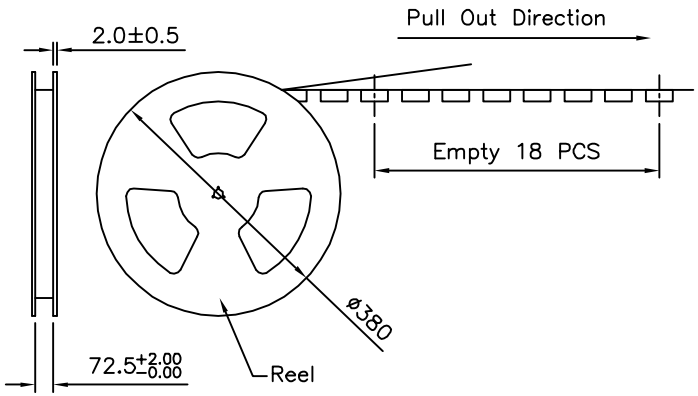

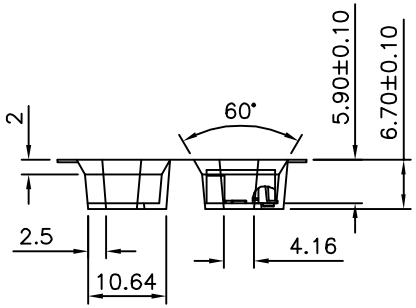





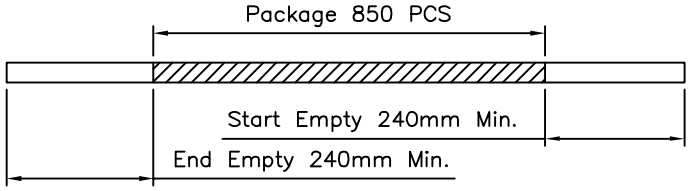

AUK
A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No. ⚠1 SATA22PWBPC-X-R8H5-H		CHECKED BY	HZF
DRAWING No. SATA22PWBPC-X-R8H5-H		DRAWING BY	SONG
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.15
.XX ±0.10
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify P/N:SATA22PWBP-SXX-H --> SATA22PWBPC-X-R8H5-H	HZF	08/15/2014
⚠0	A0	NEW RELEASE	HZF	01/28/2010