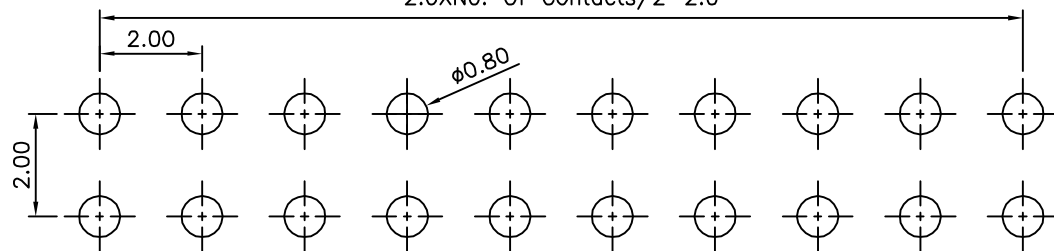
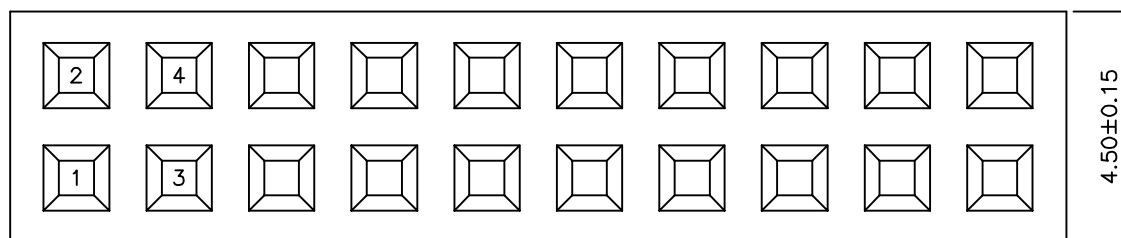
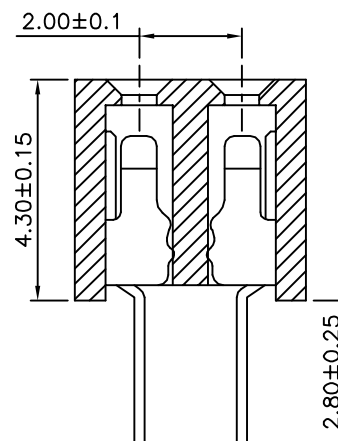
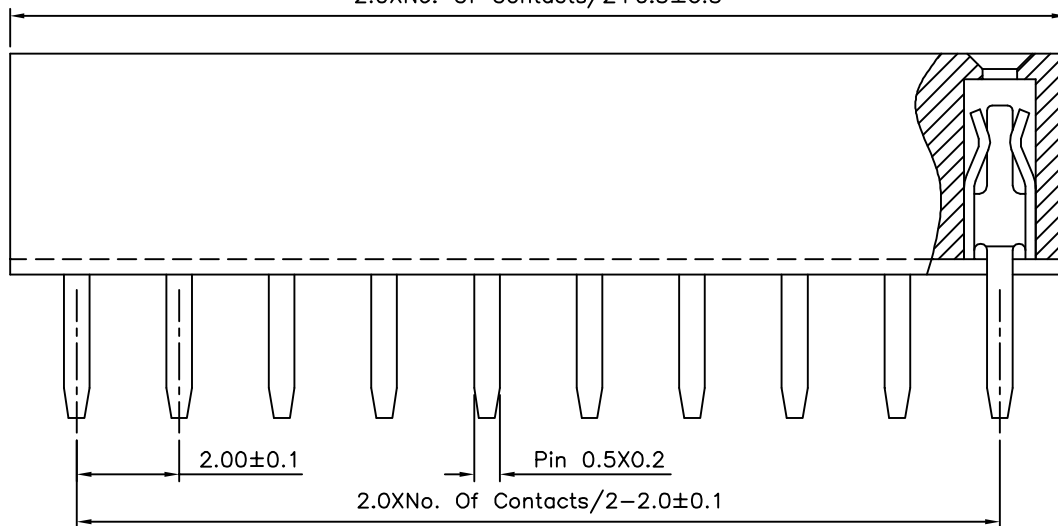


$2.0 \times \text{No. Of Contacts} / 2 - 2.0$ 

Recommended P.C.B. Layout

 $2.0 \times \text{No. Of Contacts} / 2 + 0.5 \pm 0.3$ 

SPECIFICATION

Current Rating: 1.5 Amps

Withstand Voltage: 500V AC

Contact Resistance: 20 Milliohms Max.

Insulation Resistance: 1000 Megaohms Min.

Operation Temperature Range: -40°C ~ +105°C

Insulator: PA6T(UL94V-0), Black

⚠ Contact: Phosphor Bronze, Gold Plated Over Nickel
RoHS Compliant

S	D	2	X	XX	-	H	H
(1)	(2)	(3)	(4)	(5)	(6)		

(1) S: 2.0mm Female Header

(2) D: DIP Straight

(3) 2: Dual Row

(4) XX: No. Of Position/Per Row

(5) H: Withstand High Temperature Soldering

(6) H: RoHS Compliant

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.

CHECKED BY

HZF

DRAWING No.

DRAWING BY

SONG

SD2XXX-HH

SCALE

NONE

REV.

A1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

A1

Modify Spec.

HZF

04/17/2014

A0

NEW RELEASE

HZF

12/11/2013