


△ SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:50V AC/DC
 Temperature Range:-25°C~+85°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Withstanding Voltage:500V AC/Minute
 Material:PBT+15%G.F.(UL94V-0),Nature
 RoHS Compliant

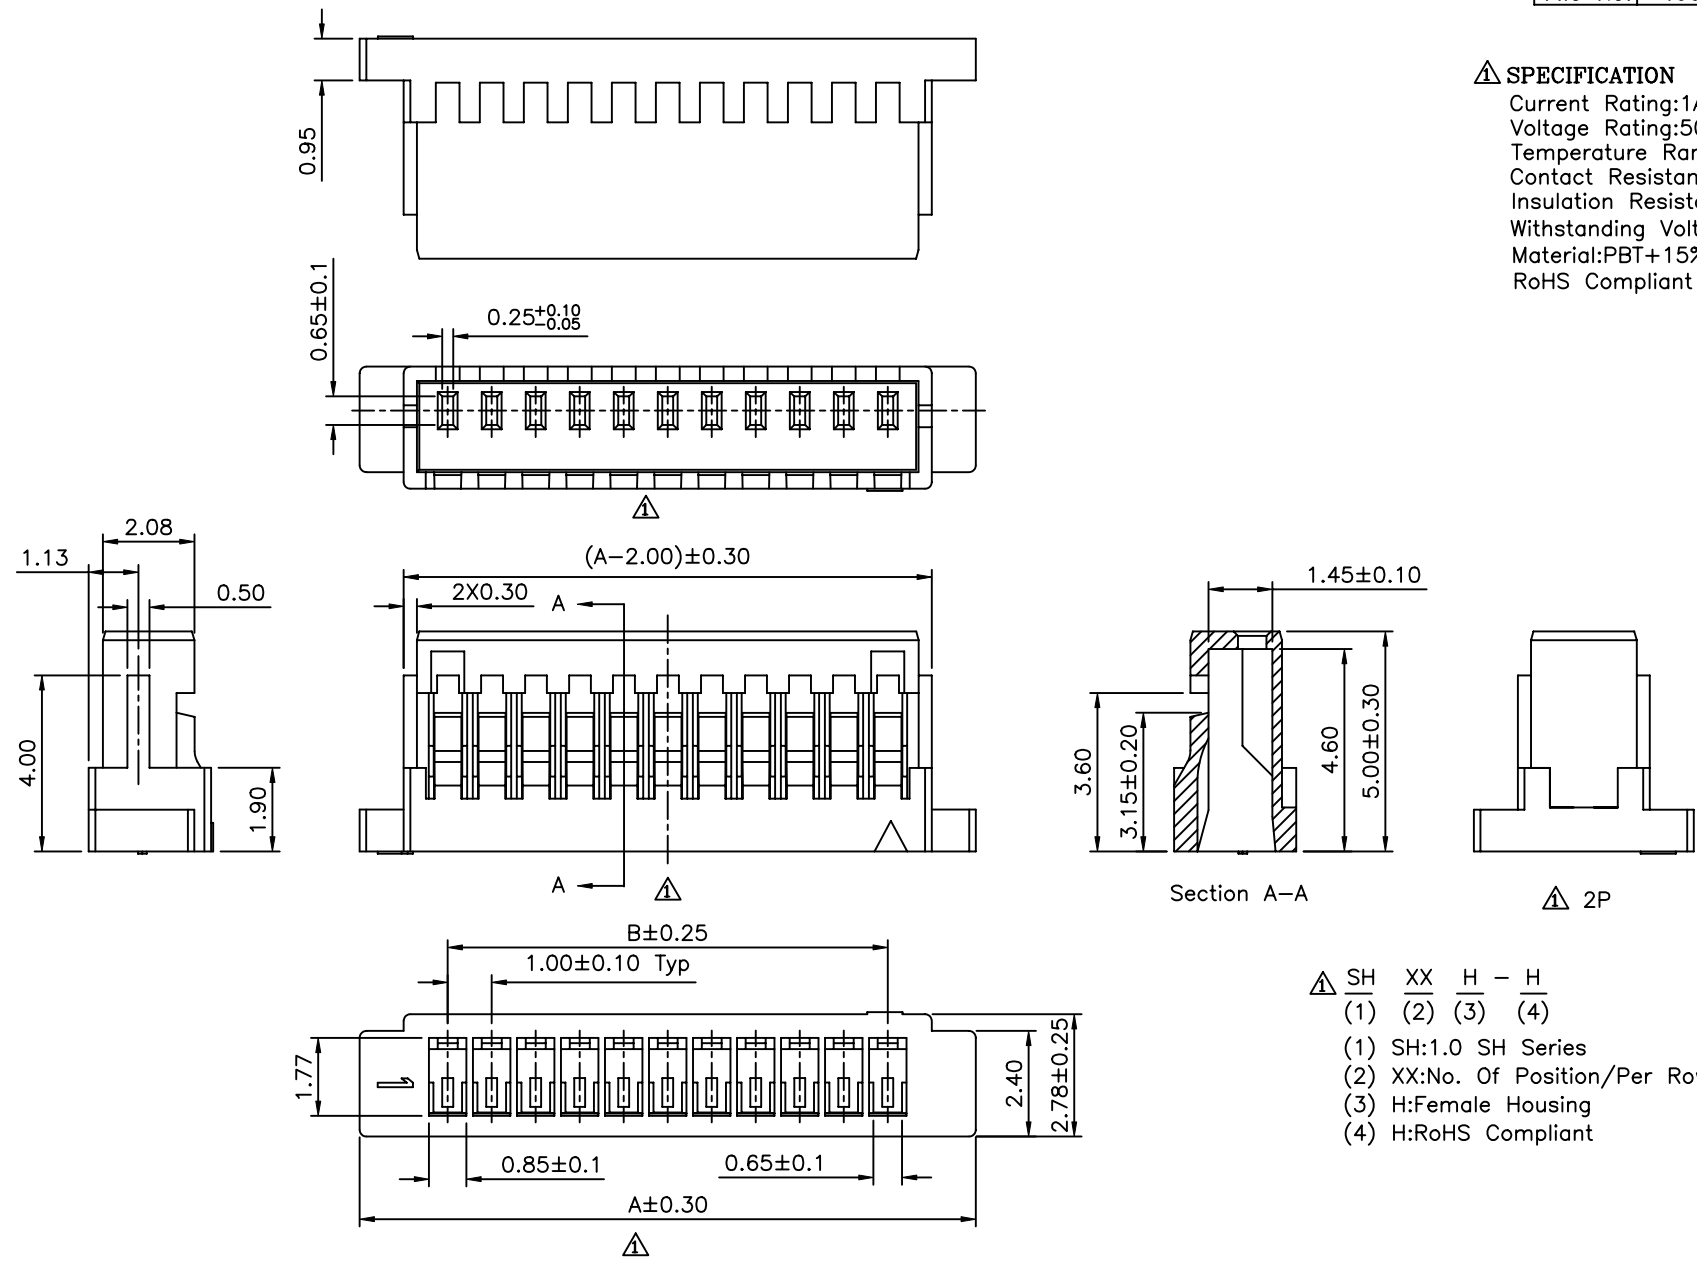

Pin	A	B
2	5.00	1.00
3	6.00	2.00
4	7.00	3.00
5	8.00	4.00
6	9.00	5.00
7	10.00	6.00
8	11.00	7.00
9	12.00	8.00
10	13.00	9.00
11	14.00	10.00
12	15.00	11.00
13	16.00	12.00
14	17.00	13.00
15	18.00	14.00
16	19.00	15.00
17	20.00	16.00
18	21.00	17.00
19	22.00	18.00
20	23.00	19.00

△ SH XX H - H
 (1) (2) (3) (4)
 (1) SH:1.0 SH Series
 (2) XX:No. Of Position/Per Row
 (3) H:Female Housing
 (4) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .X' ±2' .XX ±0.20 .XX' ±1' .XXX ±0.10				
PART No. SHXXH-H		MEI						
DRAWING No. SHXXH-H		CHECKED BY HZF						
SCALE NONE		DRAWING BY QQJ						
REV.	A1	UNIT mm	REV.	A1	NO. REV.	REVISIONS	CHK	DATE
					△ A1	Modify Data	HZF	03/02/2010
					△ A0	NEW RELEASE	HZF	07/10/2006