


△ SPECIFICATION

Withstand Voltage:1000V AC/Mimute
 Contact Resistance:3.0 Milliohms Max.(Center Contact)
 2.0 Milliohms Max.(Outer Contact)
 Insulator Resistance:5000 Megaohms Min. At 500V DC
 Temperature Range:-40°C~+85°C
 RoHS Compliant

△ SMA - J R 50 W - BR - 19 - H


- (1) (2) (3) (4) (5) (6) (7) (8)
- (1) SMA:SMA Connector
 (2) J:Jack
 (3) R:DIP Right Angle
 (4) 50:50 Ohms
 (5) W:With Washer & Nut
 (6) BR:Brass Body
 (7) 19:Length=19.4mm
 (8) H:RoHS Compliant

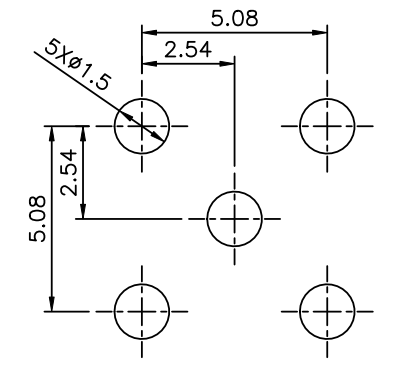

Recommended P.C.B. Layout

⑦	Nut	1	Brass	Gold Plated Over Nickel
⑥	Washer	1	Brass	Gold Plated Over Nickel
⑤	Insulator	1	Teflon	—
④	Body	1	Brass	Gold Plated Over Nickel
③	Center Pin	1	Phosphor Bronze	Gold Plated Over Nickel
②	Insulator	1	Teflon	—
①	Body	1	Brass	Gold Plated Over Nickel
△ No.	Description	Q'ty	Material	Remark

△

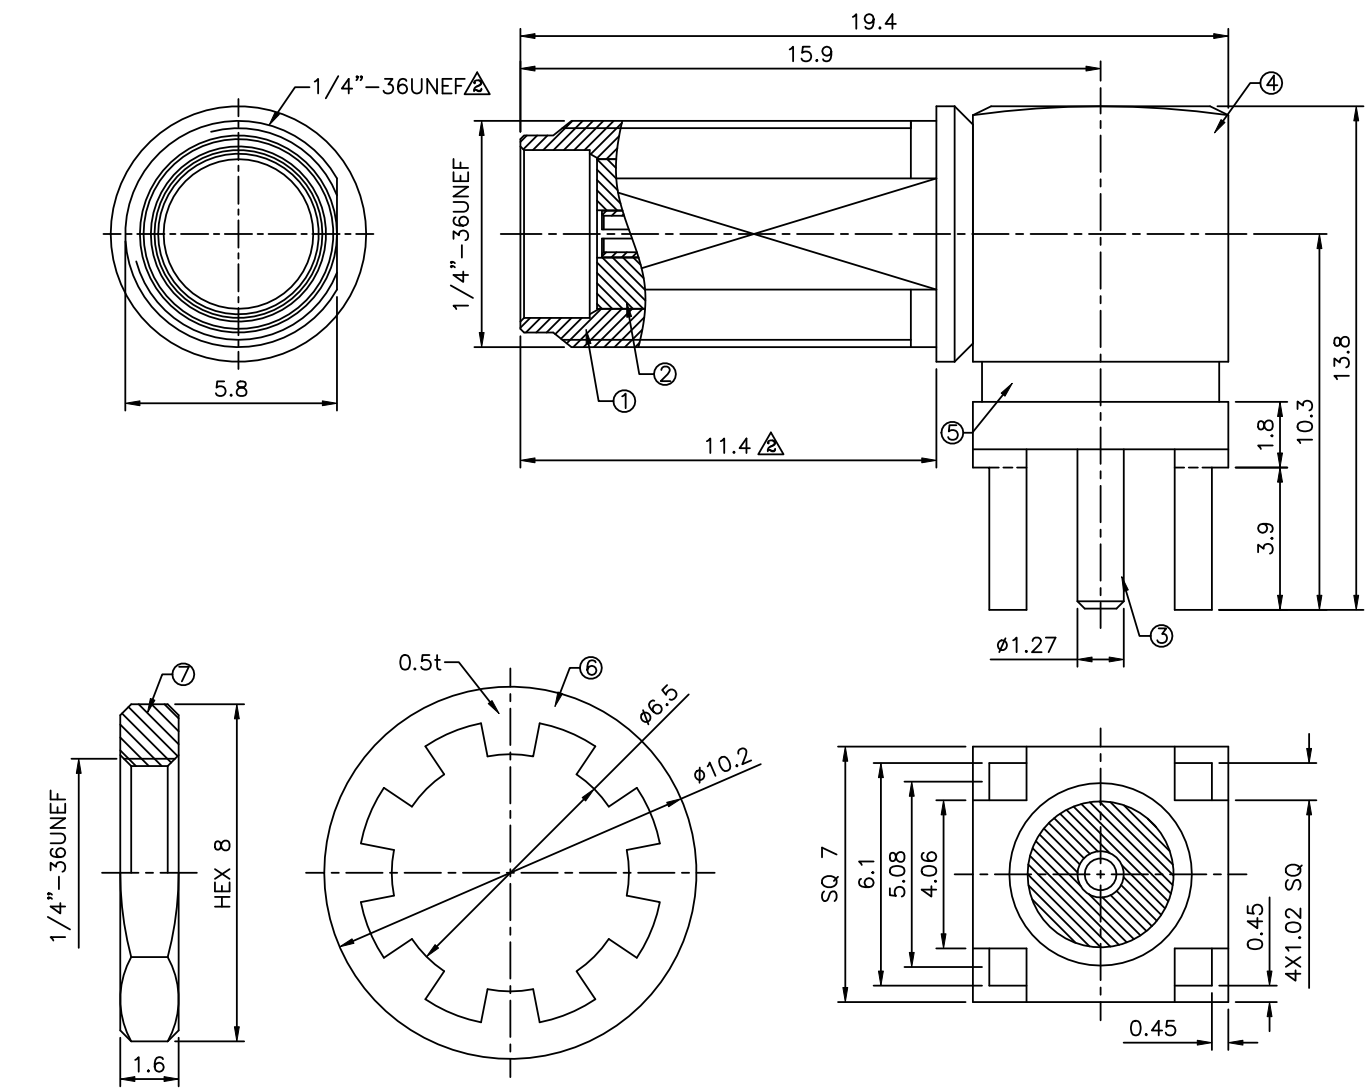

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.2 .X ±0.2 .XX ±0.2	
PART No. 		MEI			
SMA-JR50W-BR-19-H		CHECKED BY			
DRAWING No.		DRAWING BY			
SMA-JR50W-BR-19-H		CYP			
SCALE	NONE	REV.	A2	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/02/2017
△ A1		Modify P/N:SMA-JR50W-BR-H -->SMA-JR50W-BR-19-H	HZF	02/24/2012
△ A0		NEW RELEASE	HZF	10/19/2010