

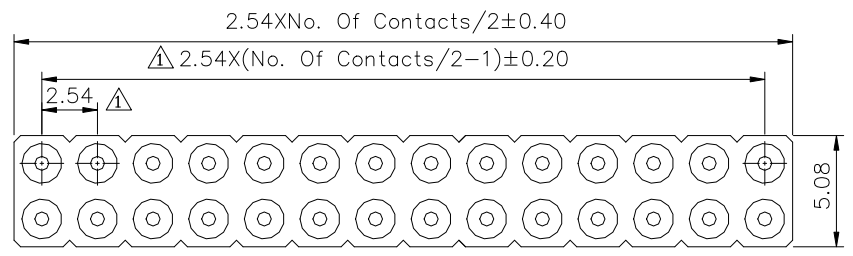


△△ SPECIFICATION
 Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megohms Min. At 100V
 Operation Voltage: 60V AC/DC
 Operation Temperature: -55°C~+105°C
 △ Contact: Brass, Gold Flash Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant

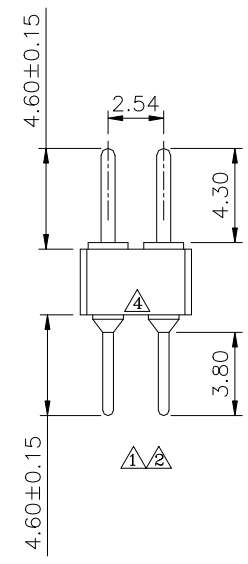

△ SPE 2 X XX G - H H
 (1) (2) (3) (4) (5) (6)
 (1) SPE: 2.54mm Swiss Round Pin Adaptor Type
 (2) 2: Dual Row
 (3) XX: No. Of Position
 (4) G: Gold Flash Over All, Over Nickel
 (5) H: Withstand High Temperature Soldering
 (6) H: RoHS Compliant

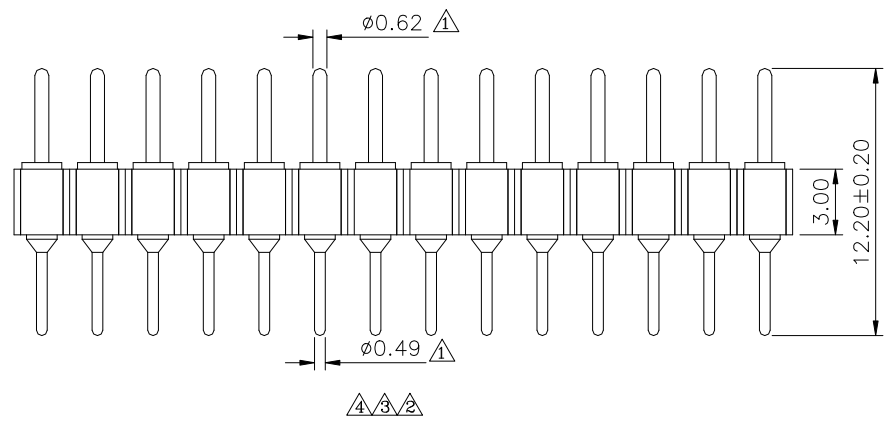

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.50 X ±0.30 XX ±0.20 .XXX ±0.10 ANG. ±5°	△ A4	Modify Data	HZF	01/21/2016	
PART No. △ SPE2XXXG-HH		CHECKED BY			△ A3	Modify Data	HZF	02/11/2014	
DRAWING No. SPE2XXXG-HH		DRAWING BY			△ A2	Modify P/N: SPE2XXXG-H --> SPE2XXXG-HH	HZF	03/17/2011	
SCALE	NONE	REV.	A4		△ A1	Modify Data	HZF	10/22/2010	
				UNIT	mm	△ A0	NEW RELEASE	BECKY	07/20/2005
				NO. REV.	REVISIONS		CHK	DATE	