
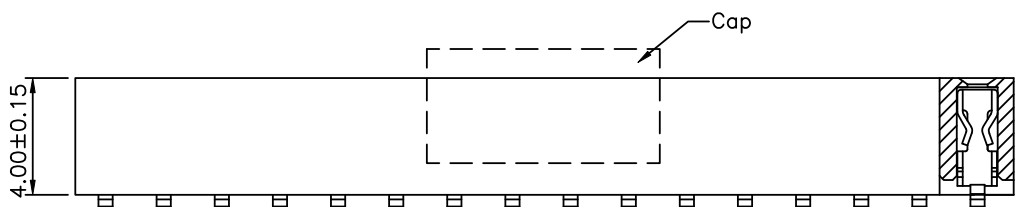


Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

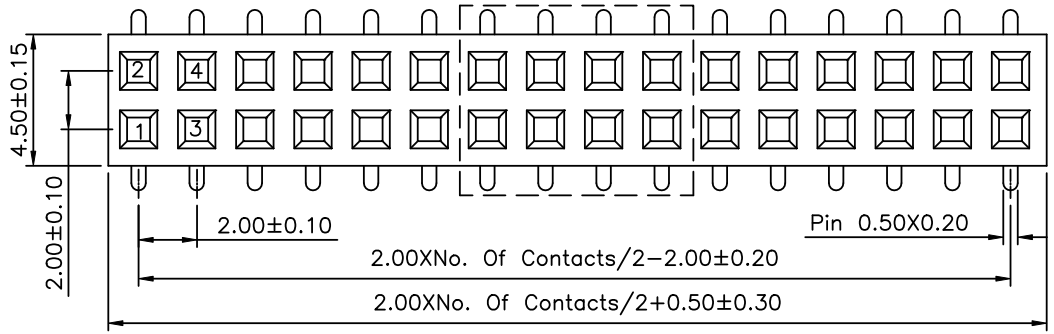


SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

S V X 43 - 2 X XX C - RXXX - H
(1) (2) (3) (4) (5) (6) (7) (8) (9)

- (1) S:2.0mm Female Header
- (2) V:SMT Straight
- (3) X:Without Post
- (4) 43:4.3mm Total Height
- (5) 2: Dual Row
- (6) XX:No. Of Position/Per Row
- (7) C:With Cap
- (8) RXXX:Tape & Reel
- (9) H:RoHS Compliant



AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
PART No. SVX43-2XXXC-RXXX-H		MEI		
DRAWING No. SVX43-2XXXC-RXXX-H		CHECKED BY HZF		
SCALE		DRAWING BY CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.REV.	A0	NEW RELEASE	HZF	06/01/2016
		REVISIONS	CHK	DATE