
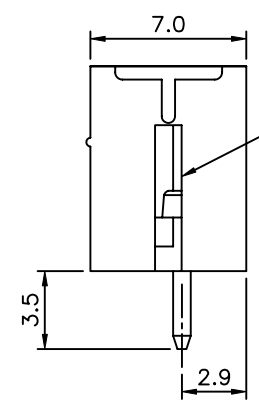



P.C.B. Layout

**SPECIFICATION**

Current Rating:8A  
 Voltage Rating:250V AC  
 Insulation Resistance:500 Megaohms At DC 500V  
 Withstanding Voltage:AC 1200V(1Minute)  
 Using Temperature Range:-40°C To +105°C  
 Soldering Temperature:+250°C,5Seconds Max.  
 Solder Pin:Brass,Tin Plated  
 Insulator Body(Housing):Polyamide(Glass Filled)  
 (UL94V-0),Green  
 RoHS Compliant

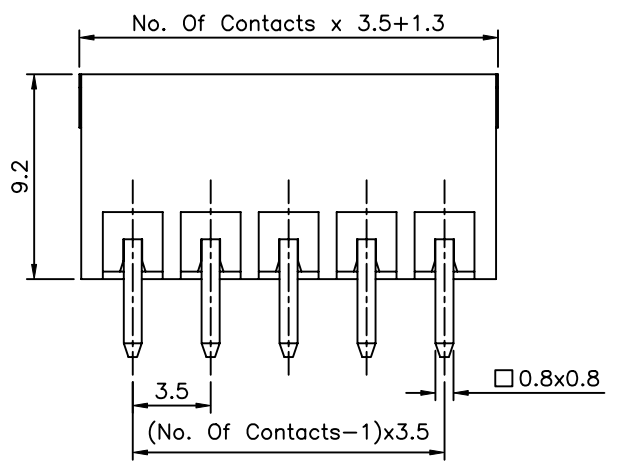

2P To 6P Open Type  
 Above 7P (Including 7P) Coles Type

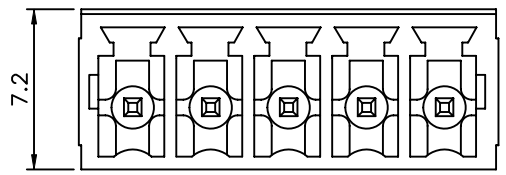

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X* ±1*						
PART No. TB35XXPDB-H		MEI								
DRAWING No. TB35XXPDB-H		CHECKED BY HZF								
		DRAWING BY LXX								
SCALE	NONE	REV.	A0	UNIT mm			NO. REV.	A0 NEW RELEASE	HZF	04/07/2009
							REVISIONS	CHK	DATE	