
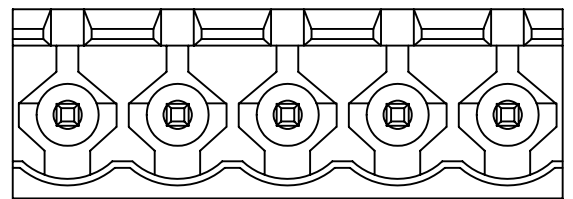
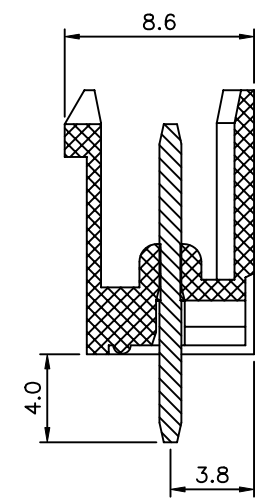


Recommended P.C.B. Layout

SPECIFICATION

Voltage Rating:250V AC
 Current Rating:10A
 Withstanding Voltage:1500V AC(1 Min)
 Insulation Resistance:500 Megaohms Min.
 At DC 500V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5 Seconds Max.
 Solder Pin:Brass,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

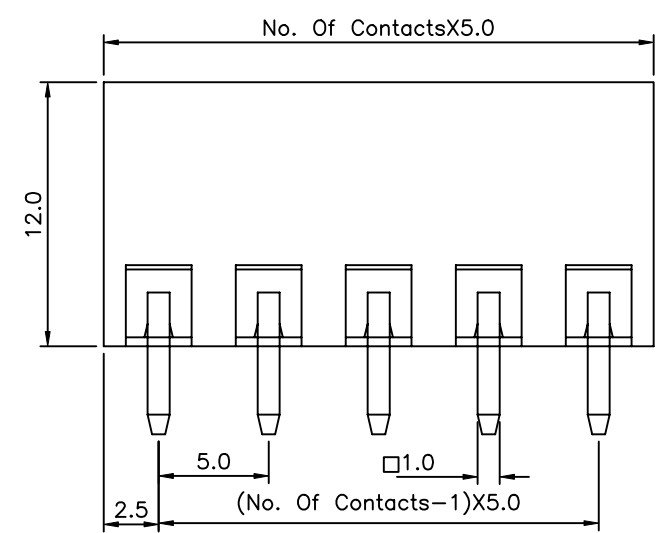

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ₁ ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°						
PART No. TBHXXD-H		MEI								
DRAWING No. TBHXXD-H		CHECKED BY HZF								
		DRAWING BY QQJ								
SCALE	NONE	REV.	A0	UNIT mm		NO. REV.	A0	NEW RELEASE	HZF	08/12/2009
						REVISIONS		CHK	DATE	