
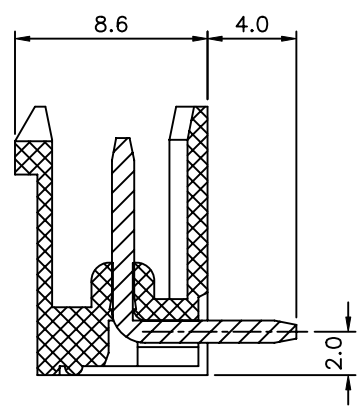
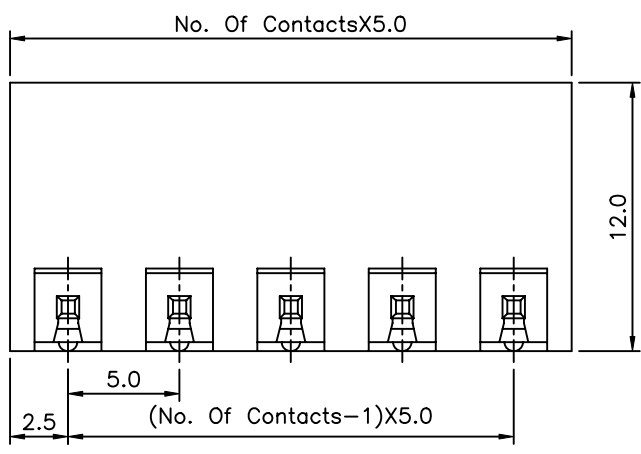


Recommended P.C.B. Layout

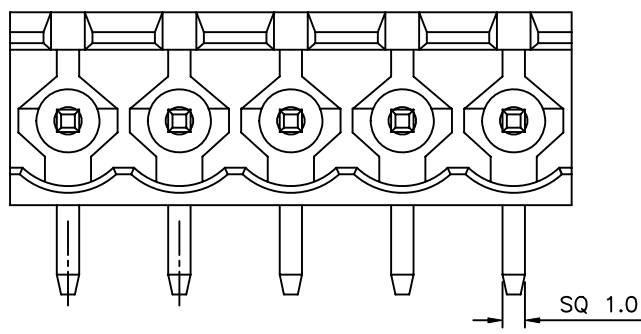

△ SPECIFICATION
 Current Rating:10A
 Voltage Rating:250V AC
 Withstand Voltage:2500V AC(1 Minute)
 Insulation Resistance:5000 Megaohms At DC 1000V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5 Seconds Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
 Contact:Copper Alloy,Tin Plated
 RoHS Compliant

△ TBH XX R - XX - H
 (1) (2) (3) (4) (5)

- (1) TBH:5.0mm Terminal Block
- (2) XX:No. Of Position/Per Row
- (3) R:DIP Right Angle
- (4) XX:Insulator Color
 Blank:Green
 BL:Blue
 BK:Black
- (5) H:RoHS compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. △ TBHXXR-XX-H		EMILY	
DRAWING No. TBHXXR-XX-H		CHECKED BY HZF	
SCALE		DRAWING BY WSS	
NONE	REV.	A1	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X° ±1°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify P/N:TBHXXR-H --> TBHXXR-XX-H	HZF	04/20/2011
△ A0		NEW RELEASE	HZF	05/13/2009