
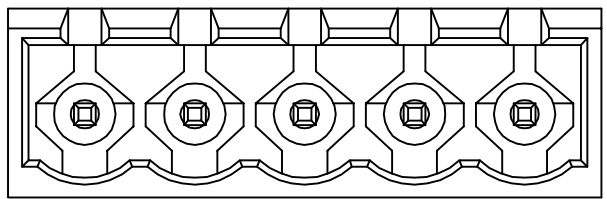
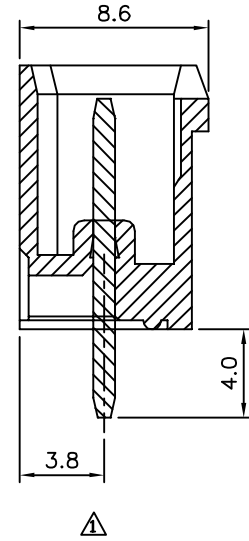


Recommended P.C.B. Layout

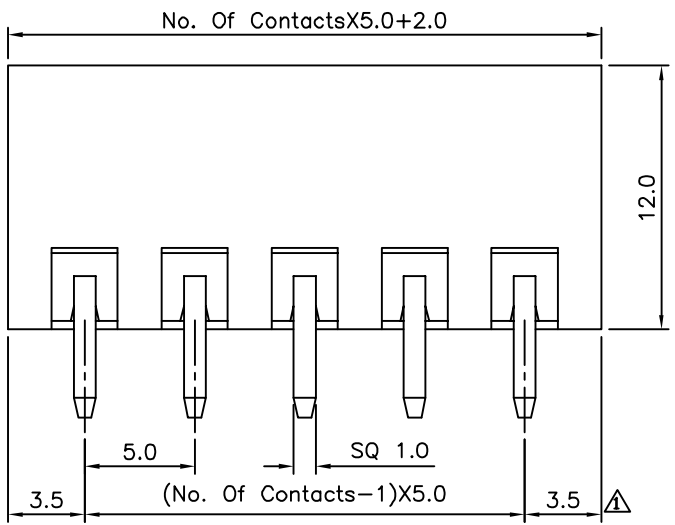

△ SPECIFICATION
 Voltage Rating:300V AC
 Current Rating:16A
 Withstanding Voltage:2500V AC(1Minute)
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:+250°C,5Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
 RoHS Compliant

△ TBH XX D B - XX - H
 (1) (2) (3) (4) (5) (6)
 (1) TBH:5.0mm Terminal Block Pluggable
 Rising Clamp Type
 (2) XX:No. Of position
 (3) D:DIP Straight
 (4) B:Close End
 (5) XX:Insulator Color
 Blank:Green
 BL:Blue
 BK:Black
 (6) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X° ±1°	UNIT	
PART No. TBHXXDB-XX-H		CHECKED BY HZF			mm	
DRAWING No. TBHXXDB-XX-H		DRAWING BY SONG				
SCALE	NONE	REV.	A1			

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify P/N:TBHXXDB-H --> TBHXXDB-XX-H	HZF	01/31/2012
△ A0		NEW RELEASE	HZF	06/27/2010