

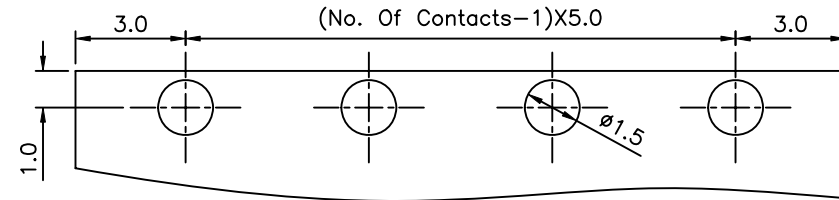
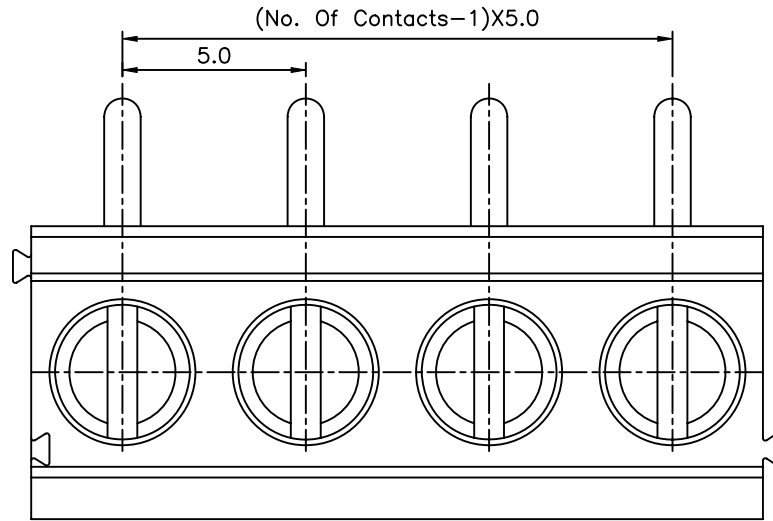


SPECIFICATION

Current Rating: 8 Amp/Way Max.
 Voltage Rating: 300V AC
 Withstanding Voltage: 1500V AC/Minute Test Time=60 Seconds/PCS
 Insulation Resistance: 5000 Megohms/1000V
 Contact Resistance: 20 Milliohms Max.
 Wire Range: 14~26AWG
 Torque: 4.0 kgf.cm/M2.5
 Operation Temperature: -33°C~+120°C
 Soldering Reliability: Test Temperature=250°C±10°C 5 Seconds Max.
 Contact(Metal Housing): Brass(CuZn)
 Terminal Screw: Steel, Galvanized With Cr3+ Plated
 Wire Guard: Stainless Steel
 Surface Of Solder Tail: Tin Plated
 Insulator Body(Housing): Polyamide(G.F.)(UL94V-0)
 RoHS Compliant

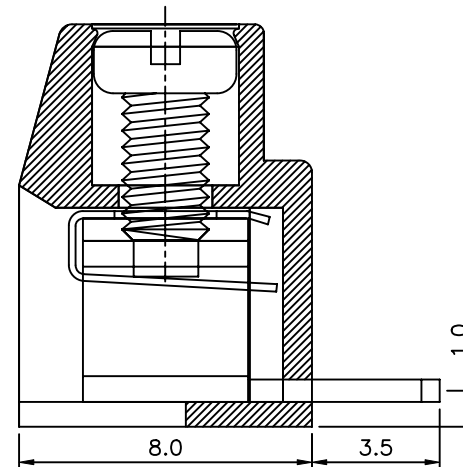

Recommended P.C.B. Layout

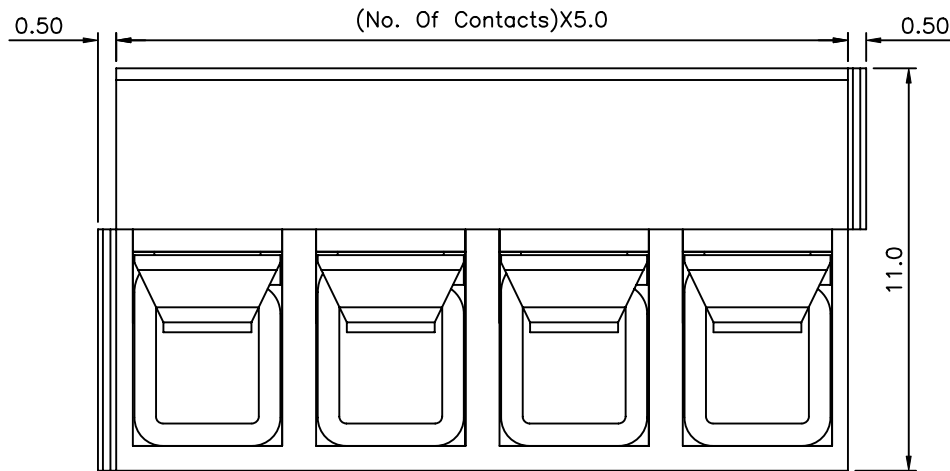

TBN XX C R - XX - H
 (1) (2) (3) (4) (5) (6)

- (1) TBN:5.0mm Terminal Block Pluggable Wire Protector Pin Type
- (2) XX:No. Of Position
- (3) C:Height=11mm
- (4) R:DIP Right Angle
- (5) XX:Insulator Color
 Blank:Blue
 GR:Green
 GE:Grey
 BK:Black
- (6) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°						
PART No. TBNXXCR-XX-H		MEI								
DRAWING No. TBNXXCR-XX-H		HZF								
SCALE NONE		WZL								
REV.	A0	UNIT mm	⊕		△ A0	NEW RELEASE		HZF	03/17/2010	
NO.	REV.	REVISIONS		CHK	DATE					