

Product Datasheet



The global certified TLD-700-C is a dual stage extremely wide input smart LED driver. 10kV surge protection level, 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports not only traditional 4-in-1 control, but also DALI2.0 and other protocols. NFC and cable programming are both available for users. All around protections including digital OTP (internal and external by NTC) with auto-recovery secure 24hour non-stop operation for luminaires.

- Horticultural
- Stadium
- Flood
- Harbor
- UV
- Fishing



- Features..... 2
- Model Lis 2
- Technical Data 3
- Safety/EMC Compliance..... 4
- Dimming 4
- Programming 6
- Lifetime vs. Case Temperature..... 8
- Power Factor vs. Load 8
- THD vs. Load 9
- Efficiency vs. Load (16A Model) 9
- Inrush Current 10
- Dielectric Strength..... 10
- Tc Point..... 10
- Packaging Information 11
- Mechanical Design 13
- Appendix – Operation Range 21
- Revision History..... 24

■ Features

- Absolute Supply Voltage: 200-528Vac or 250-740Vdc
- Great Surge Immunity 10kV
- 96% Efficiency Max.
- Customized Endcap
- Low Inrush Current
- Active Daisy Chain and Master Mode
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- Airset™ NFC Programmability
- +/-2% Output Current Accuracy
- Isolated 0-10V/PWM/Time/DALI2.0 Dimmable
- Dim Off with 1.5W Standby Power
- 12V 300mA Auxiliary Power to Power Controllers and Fans (Optional)
- UL Class P, ENEC/CB/CCC SELV Output
- Global Certified Model Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Model Lis

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	Certification
TLD-700-C16A-XYZ	180-528Vac	700 W	30-56Vdc	12.5A	16A	UL/FCC/CB/ RCM/ EAC/CE/ RoHs
TLD-700-C860-XYZ	180-528Vac	700 W	55-113Vdc	6A	8.6A	
TLD-700-C600-XYZ	180-528Vac	700 W	80-161Vdc	4.2A	6A	
TLD-700-C420-XYZ	180-528Vac	700 W	100-219Vdc	3.2A	4.2A	

XY=	Dimming Method	Programmable	12Vaux	Dim-off
NN	-	-	-	-
DN	0-10V	Cable	-	No Dim-off as default status, programmed to have Dim-off
EN	0-10V	Cable	300mA	√
TR	Time/Set Current	NFC Wireless	-	-
DR	0-10V	NFC Wireless	-	No Dim-off as default status, programmed to have Dim-off
ER	0-10V/PWM/Time	NFC Wireless	300mA	√
AR	DALI2.0	NFC Wireless	-	√
XYZ=EVA003	0-10V	Cable	300mA	√
XYZ=EVA004	0-10V	Cable	300mA	√

Z = U, UL cable with ground wire (green) S, VDE cable/Class I D, VDE cable/Class II

Note: See the **Output Operation Range Section** for programmable model details

■ Technical Data

Input Voltage	180-528Vac or 250-740Vdc
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	2.9Amax@277Vac & Full-Load, 1.8Amax@480Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	1mA max @277Vac 60Hz, UL8750,0.75mA max @220Vac 50Hz, IEC61347-1
Input Under Voltage	Shut down and auto-restart
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±2%Io for programmable model, ±5%Io for non-programmable model
Ripple Current	Ip-p:5%Io max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	110% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	$\geq 320,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimensions	9.33x4.92x1.93 by inch (body), 10.3x4.92x1.93 by inch (endcaps included) 237 x 125 x 49 by mm (body), 262 x 125 x 49 by mm (endcaps included)
Net Weight	2600g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.

■ Safety/EMC Compliance

Safety Standard	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment


■ Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	100uA	150uA	200uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		
DALI Interface Standard	IEC62386, part 101,102,207		
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA


- Dimming Curve

a. Without dim-off

0-10V Dimming Curve

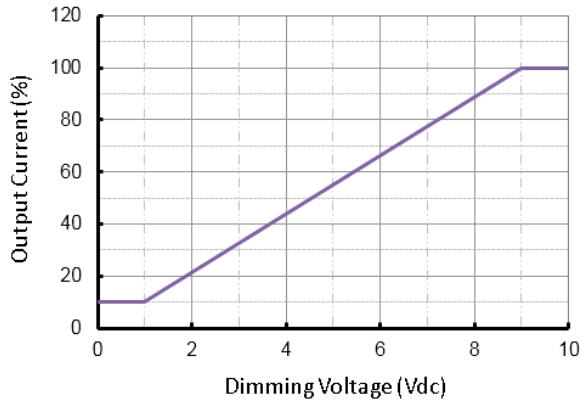


PWM Dimming Curve

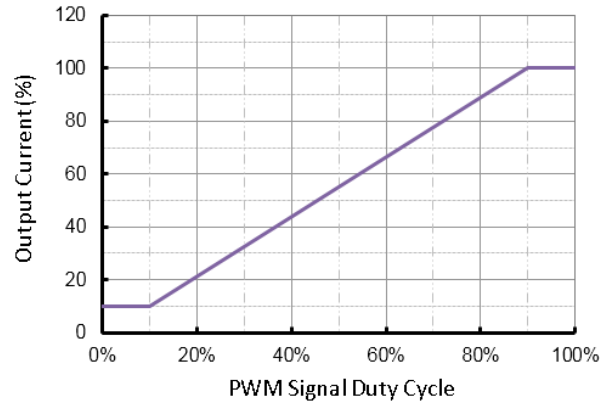


b. With dim-off


0-10V Dimming Curve

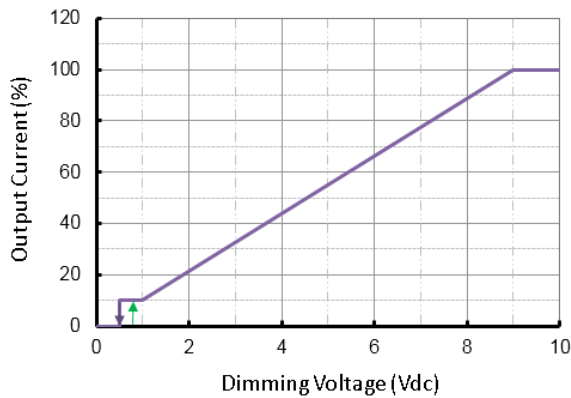

PWM Dimming Curve

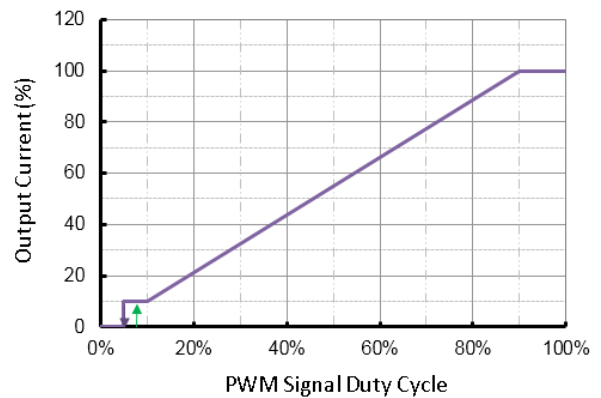

- Dimming Wiring


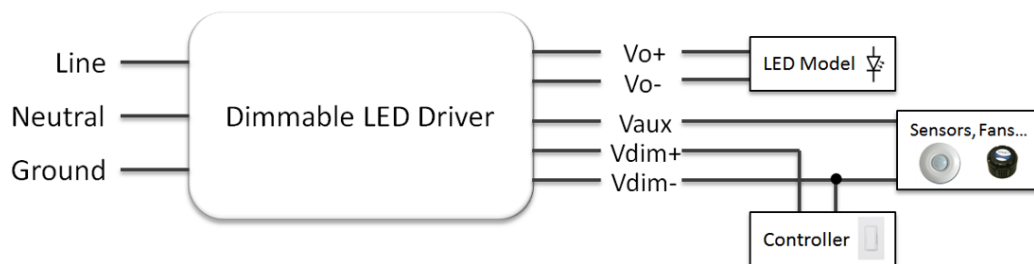


■ Programming

- NFC Programming by PC/Laptop



- Download PC Software at <https://www.upowertek.com/download-2/>
- Click Upowertek Programming Utility.exe
- The GUI start and notify you the programming mode (cable programming or NFC programming)
- Click "NFC" button if it's not NFC programming mode.

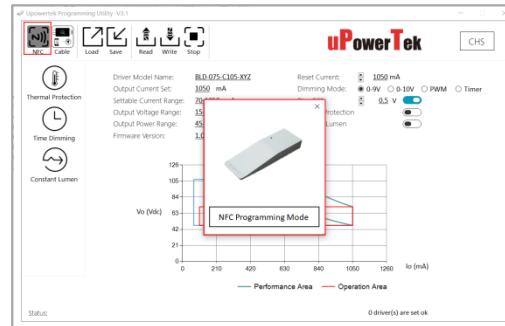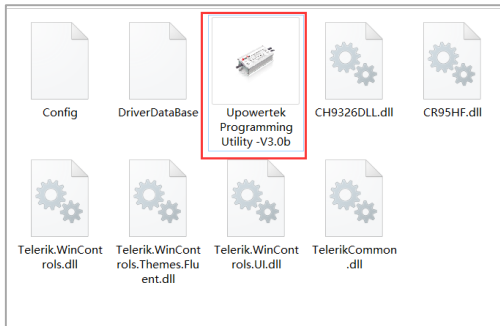

- NFC Programming by Smartphone


- Download Android APP at <https://www.upowertek.com/download-2/>
- Only available on Android cellphone (iPhone is not supported)
- The cellphone should have NFC function and make sure it is enabled.



- Turn on NFC switch of cellphone, then open the APP by icon below.





uPowerTek
Airset

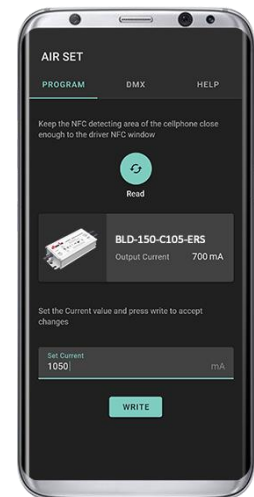

- Cable Programming



- Download PC Software at <https://www.upowertek.com/download-2/>
- Click Upowertek Programming Utility.exe
- The GUI start and notify you the programming mode (cable programming or NFC programming)

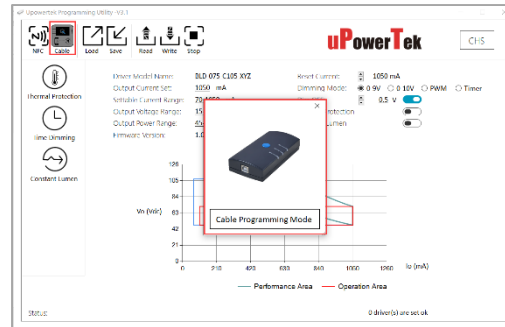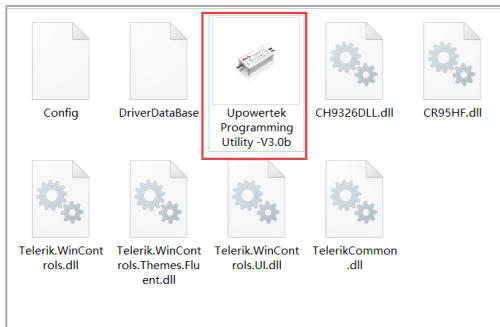


- Click "Cable" button if it's not cable programming mode.
- Connect the Vdim+ and Vdim- wires to the right ones (the same color) of the programmer.

- Please contact with us for product user manual and more information such as:


- Output Lumen Compensation
- Luminaire Thermal Protection by External NTC (with extra cable)
- Dimming Curve Customization (dim off threshold, minimum dimming level, maximum dimming voltage etc.)
- Adjustable Startup Time
- Time Dimming (adaptive mid-night, percentage, etc.)
- Customized Control Protocol

■ Lifetime vs. Case Temperature

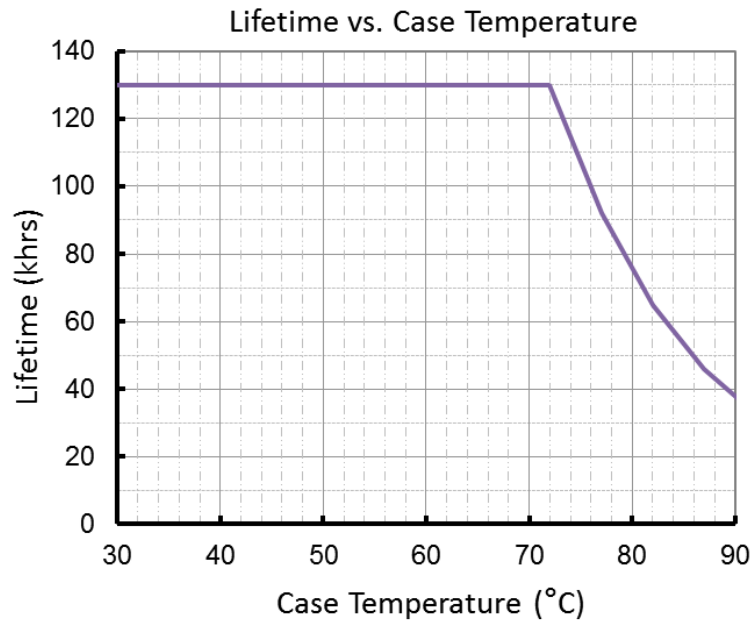


(End of Life: Maximum Failure Rate=10%)


■ Power Factor vs. Load

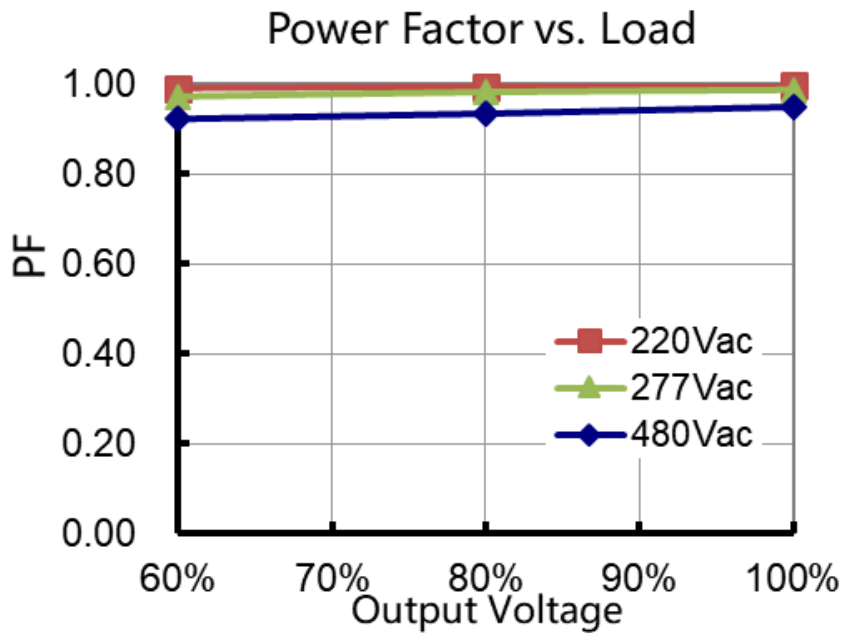


THD vs. Load

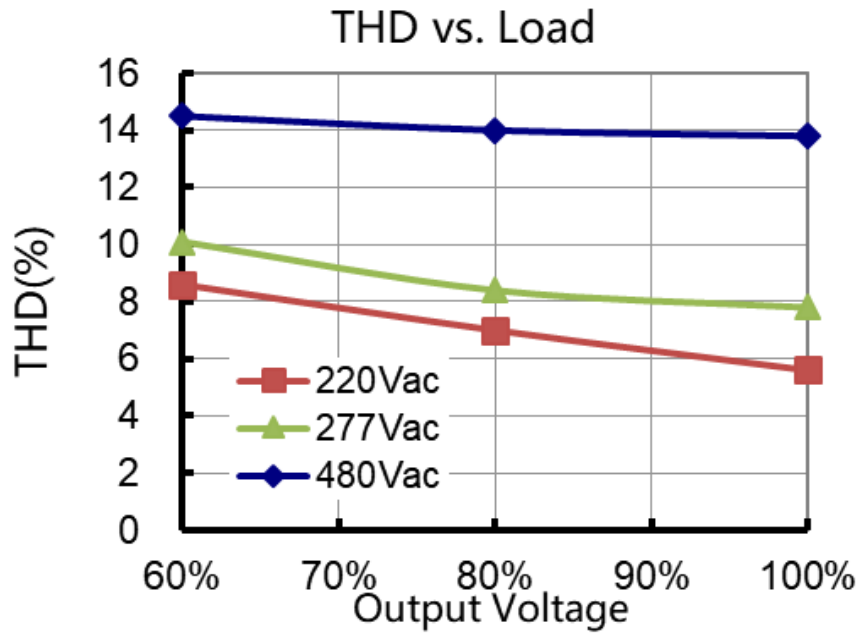

Efficiency vs. Load (16A Model)

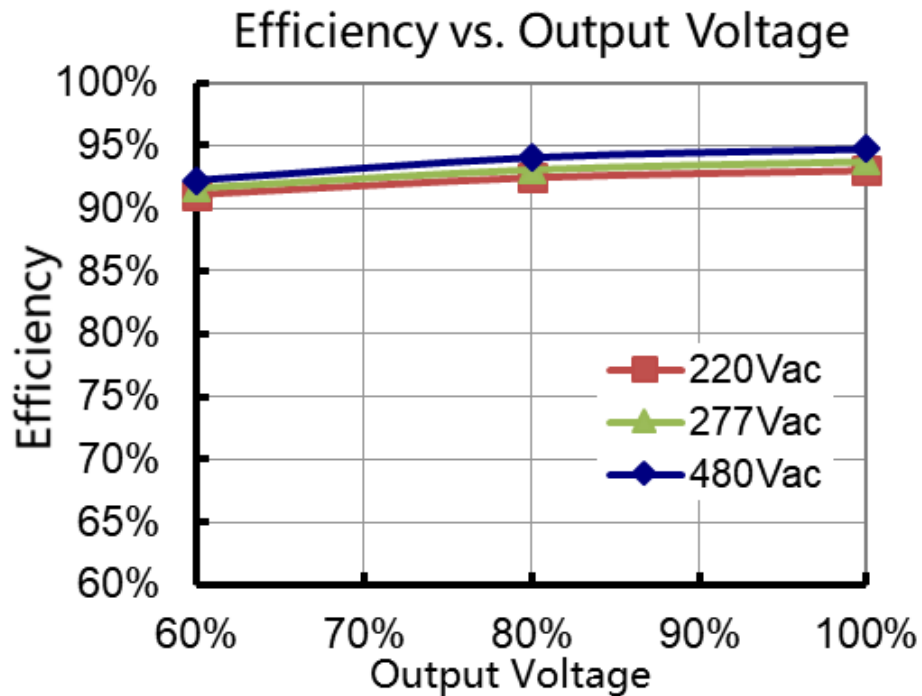

Inrush Current

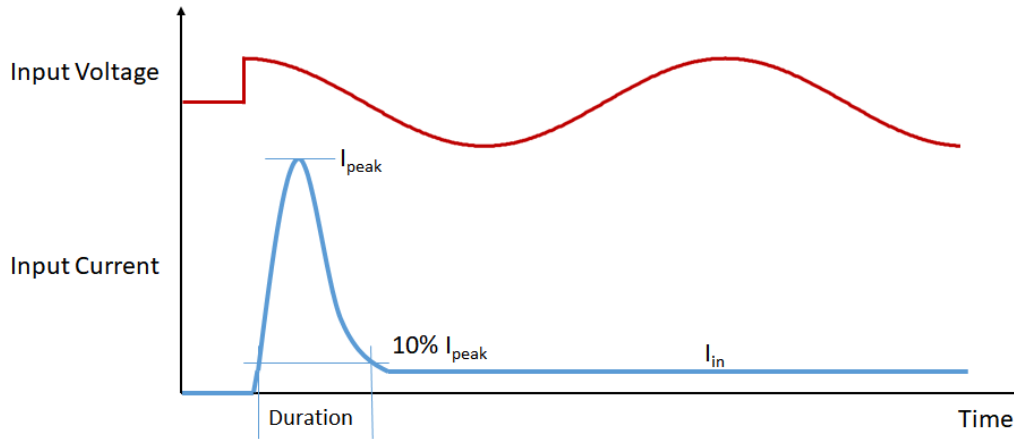


Input Voltage	I_{peak}	Duration
277Vac	7.1A	19.3mS
380Vac	10.5A	14.1mS
480Vac	13.3A	15.4mS

Please contact with us for MCB calculation and waveforms.

Dielectric Strength


Unit: Vac	Input	Output	Dimming	Case
Input	-	3920	3920	1960
Output	3920	-	1960	1960
Dimming	3920	1960	-	1960
Case	1960	1960	1960	-

Tc Point

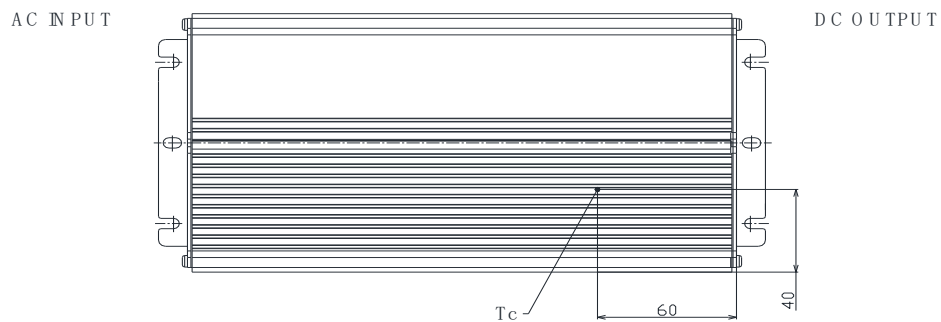

■ Packaging Information

Typical Carton Dimension(L×W×H)	490×370×140 mm
Positioning plate	2pcs/carton
Shield Board	1pcs/carton
LED Drivers	4pcs/carton

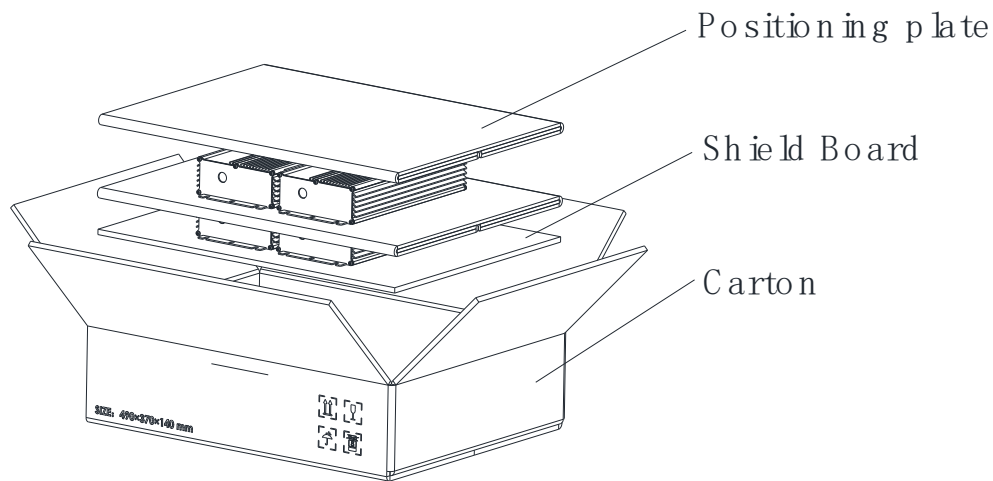


■ Accessory List

Cable	Drawing	Included in
2026030901	<p>560mm cable molded with M19 mating connector</p> <p>LLT-M19-20002M30082</p>	-EVA003
2026032701	<p>LLT-M19-20002M30082</p> <p>LLT-M19-20002F30082</p>	-EVA003


Cable	Drawing	Included in
2026011602	<p>210mm cable molded with M12 mating connector</p> <p>1 PURPLE (Vdim+) 3 PINK (Vdim-) 2 BLACK&WHITE (Vaux/+12V)</p> <p>LLT-M12-10003M3002</p>	-EVA004
2026032702	<p>710mm cable molded with M19 mating connector</p> <p>LLT-M19-20002M30082</p>	-EVA004

Mechanical Design


TLD-700-Cxxx-NN/TRU (UL Cable)

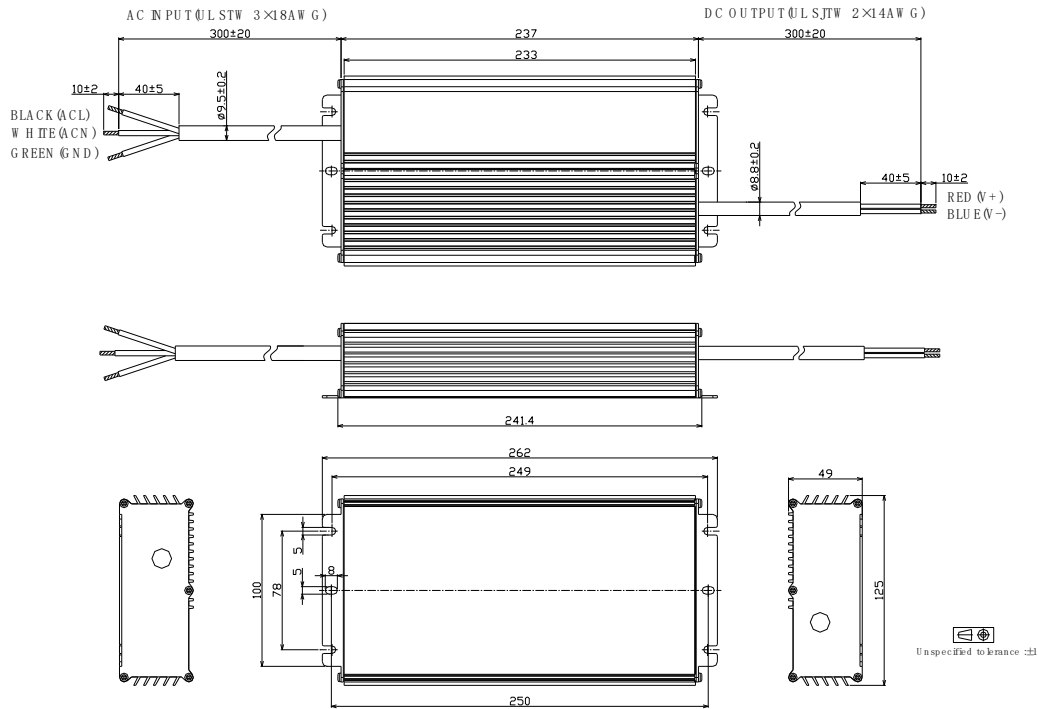


TLD-700-Cxxx-DN/DRU (UL Cable)

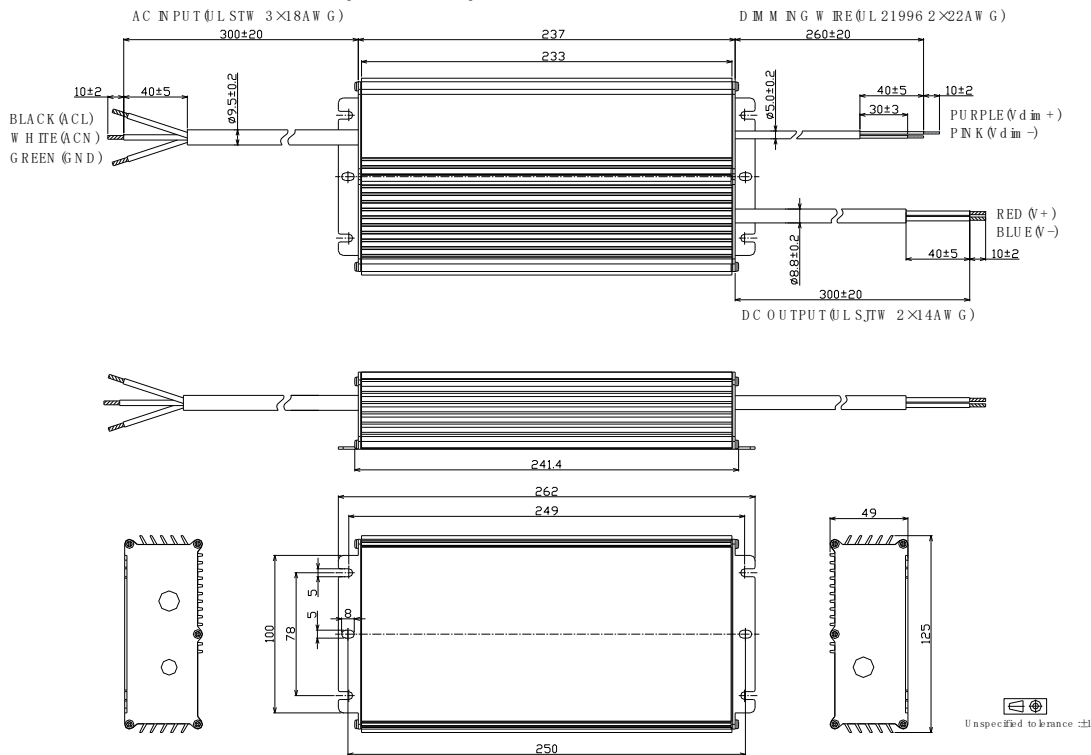


- TLD-700-Cxxx-ERU (UL Cable)

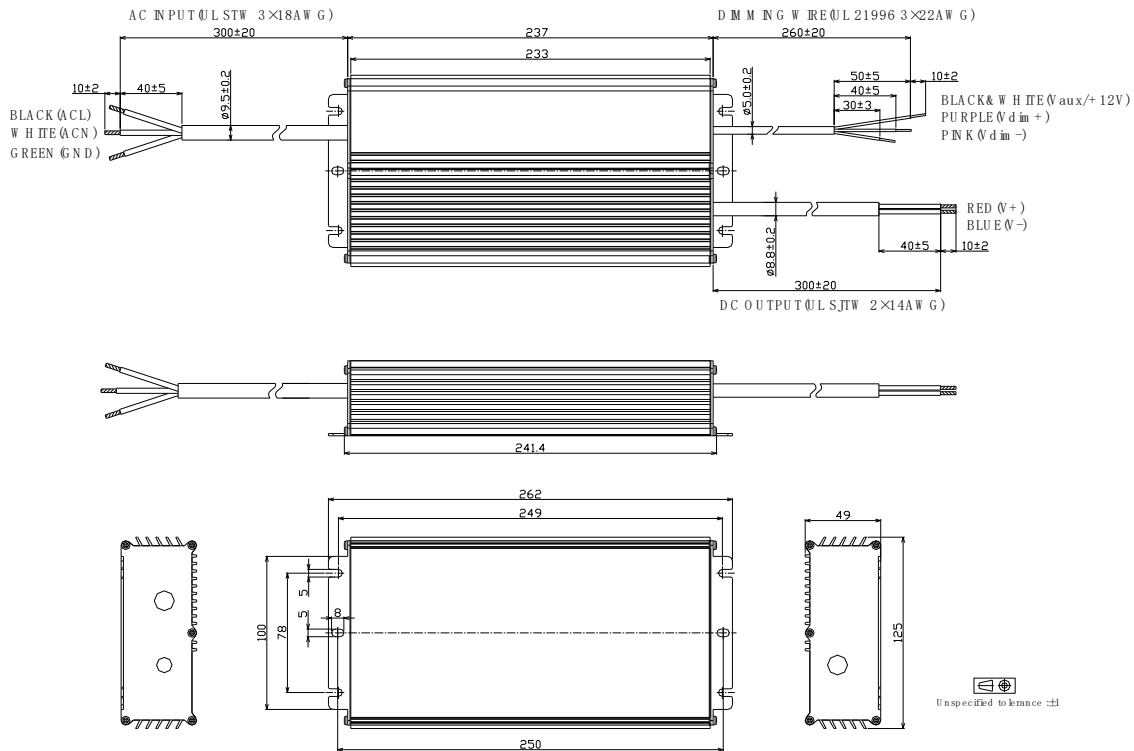


- TLD-700-Cxxx-ARU (UL Cable)

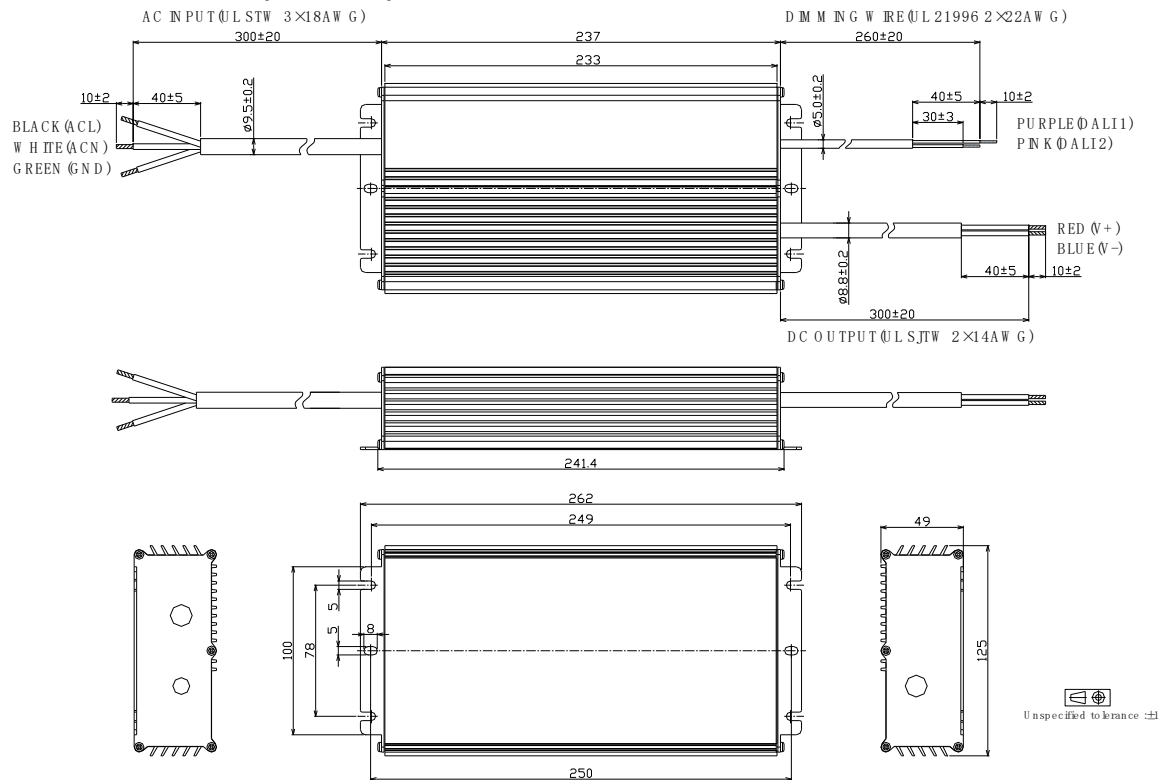


- TLD-700-Cxxx-MRU (UL Cable)

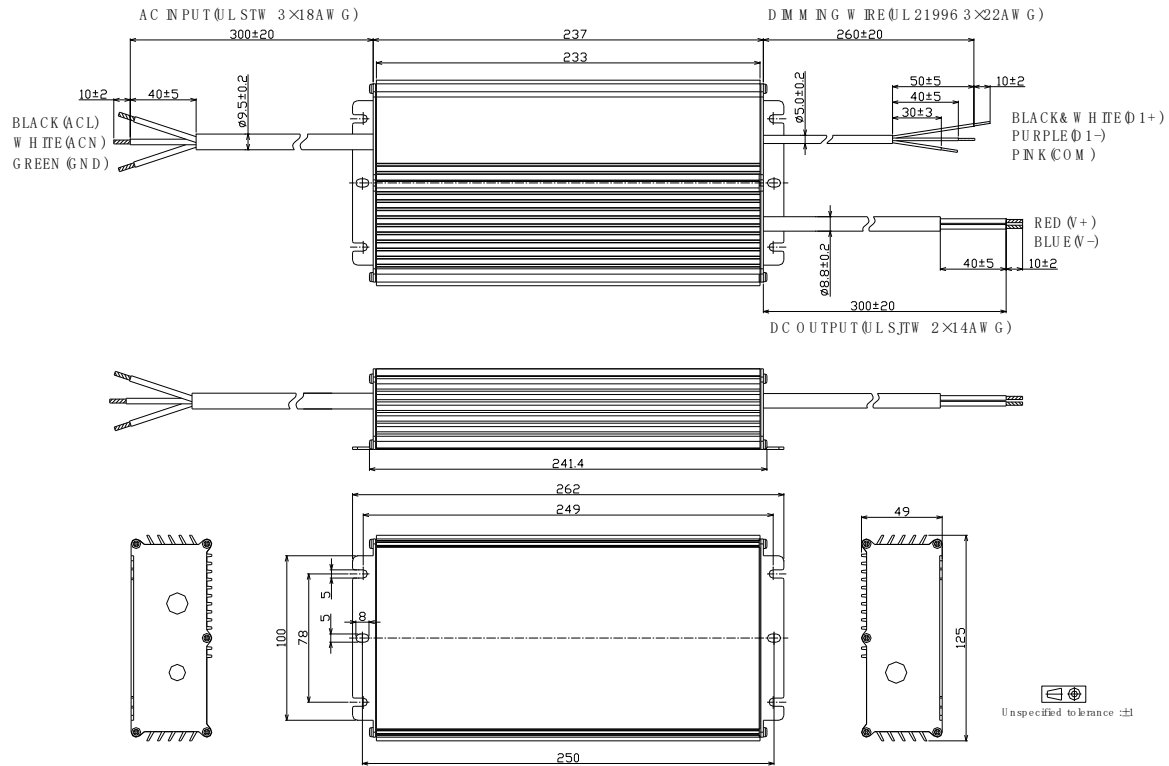


- TLD-700-Cxxx-NN/TRS (VDE CABLE, MODELS WITH HIGHER THAN 60V OUTPUT VOLTAGE)

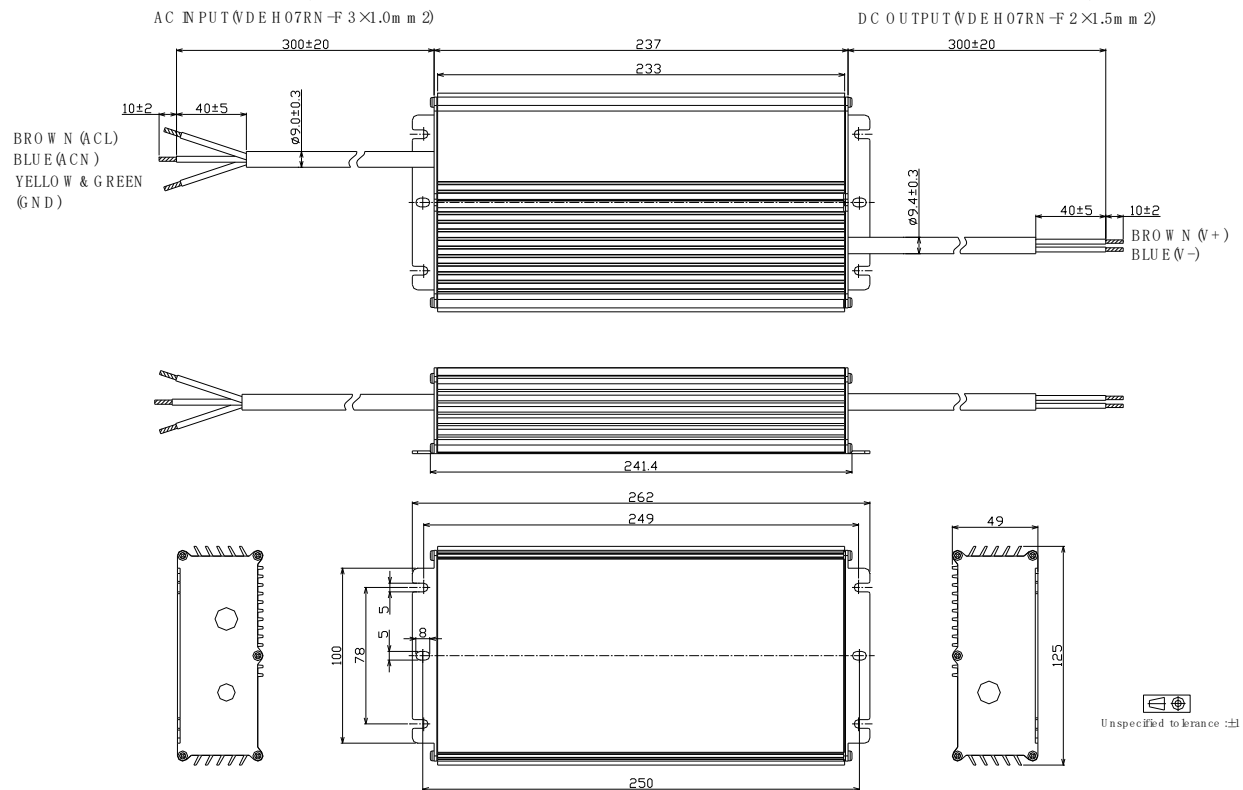

- TLD-700-Cxxx-DN/DRS (VDE CABLE, MODELS WITH HIGHER THAN 60V OUTPUT VOLTAGE)

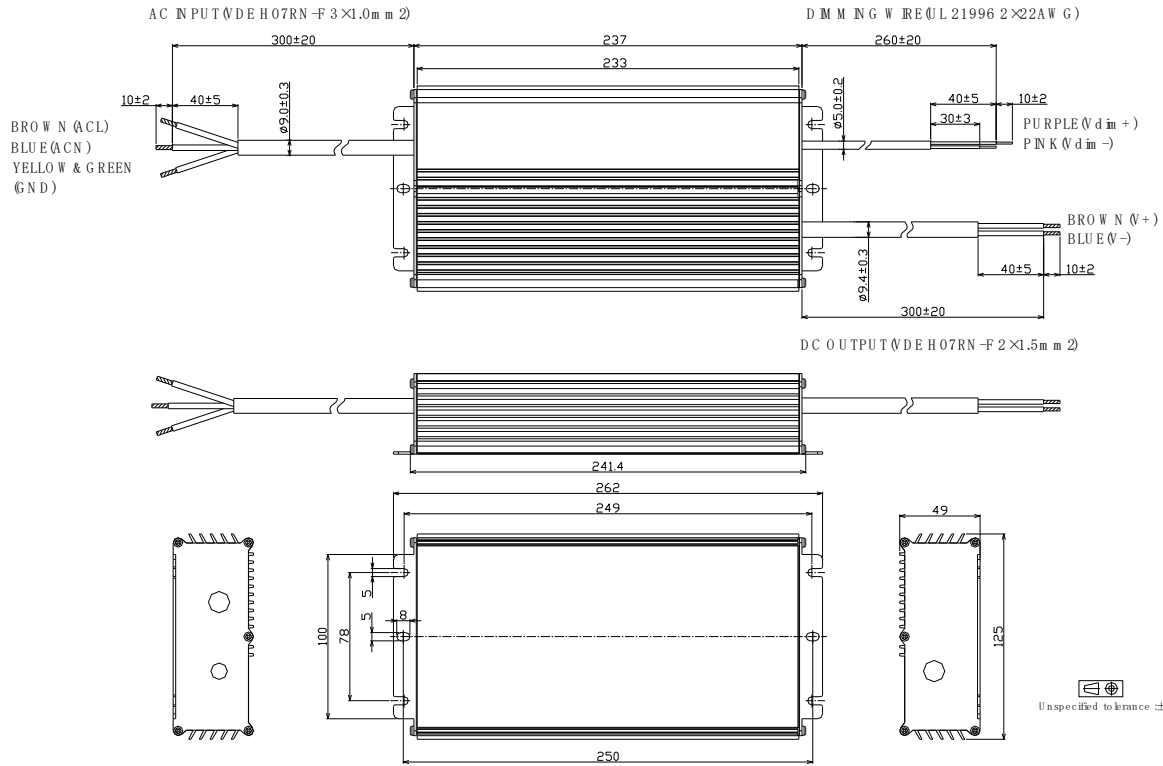


- TLD-700-Cxxx-EN/ERS (VDE CABLE, MODELS WITH HIGHER THAN 60V OUTPUT VOLTAGE)

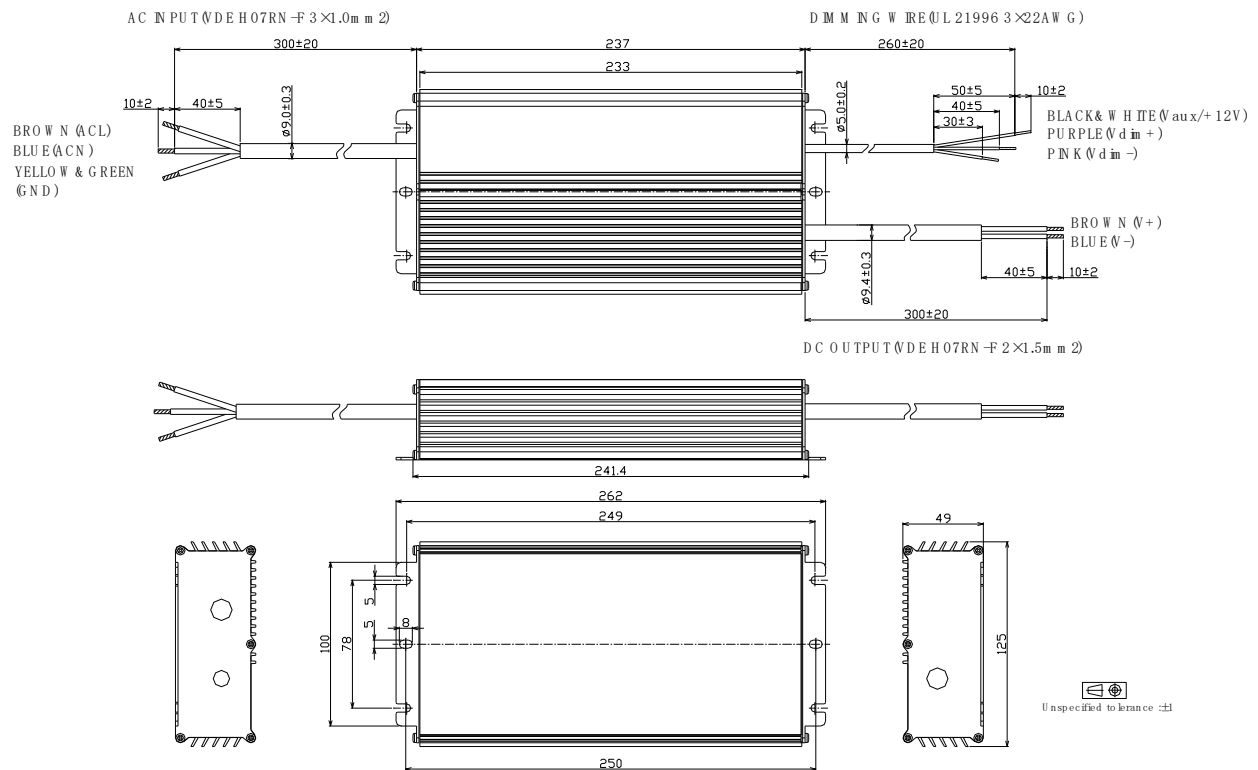


700W, 200-480Vac Input, Long Life High Quality Driver

- **TLD-700-Cxxx-NN/TRS (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)**

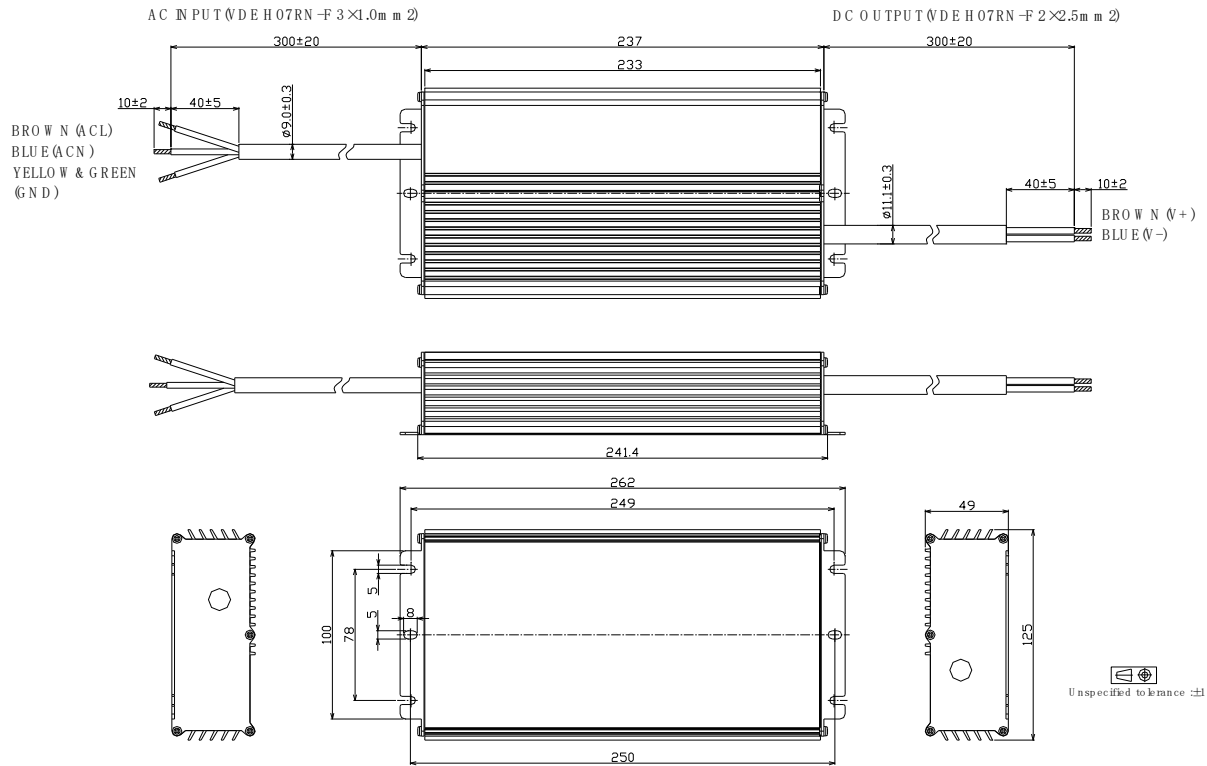


- **TLD-700-Cxxx-DN/DRS (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)**

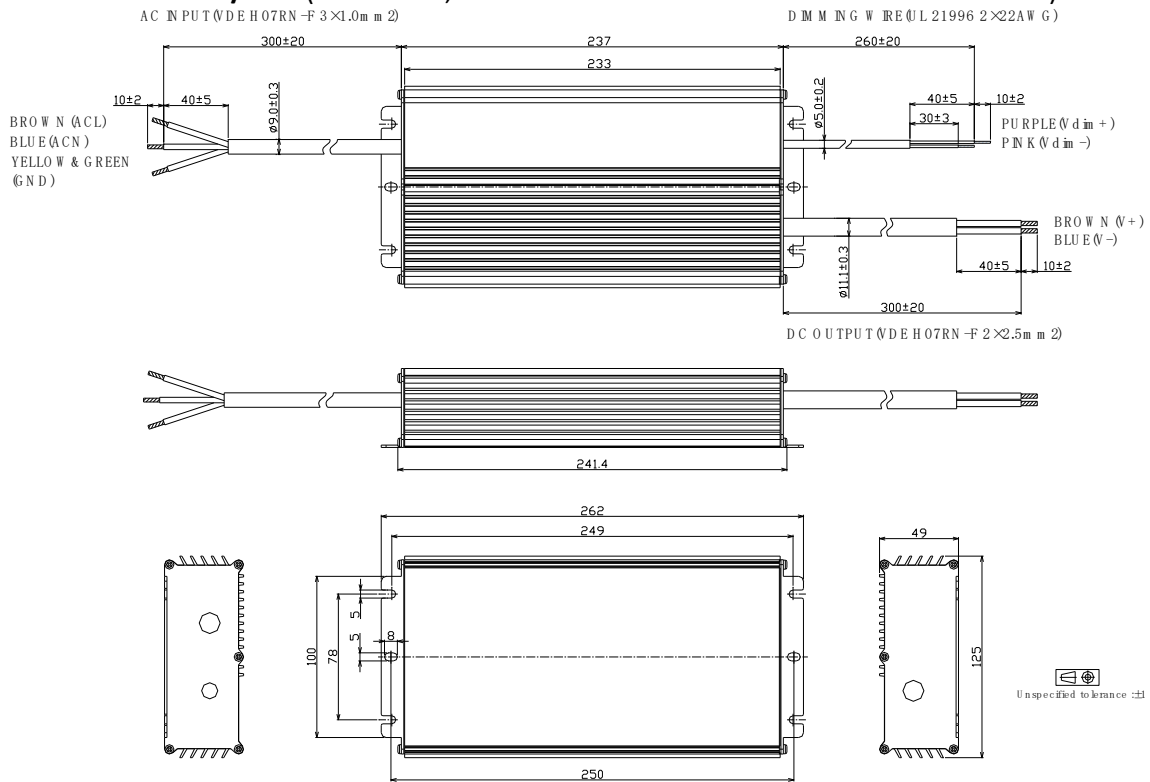


700W, 200-480Vac Input, Long Life High Quality Driver

- TLD-700-Cxxx-EN/ERS (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

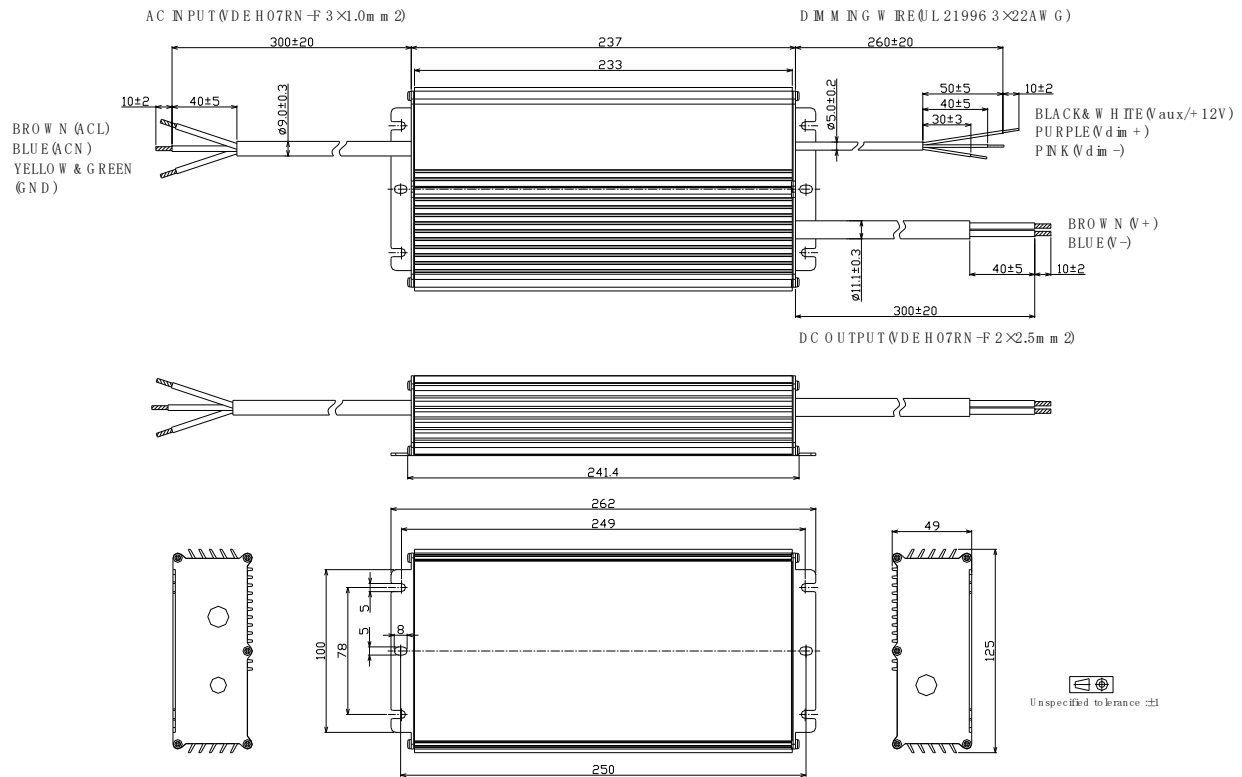


- TLD-700-Cxxx-ARS (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

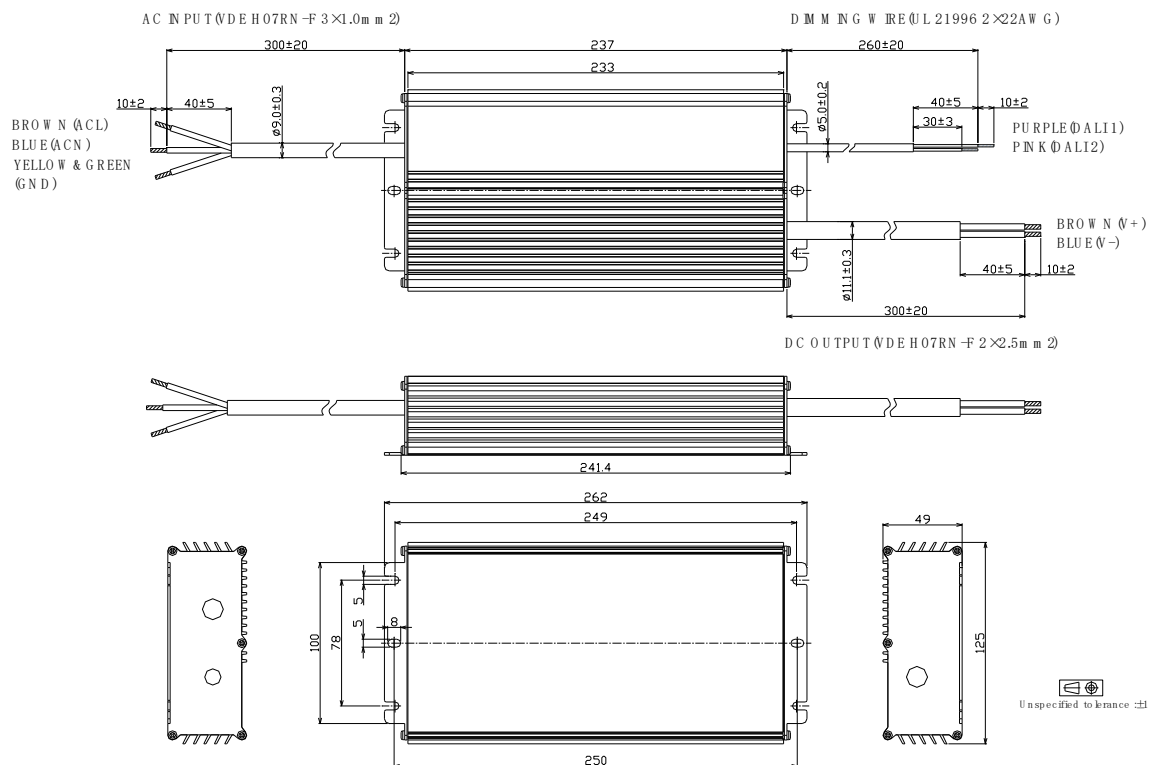

700W, 200-480Vac Input, Long Life High Quality Driver

- Customized Functional End Cap Version

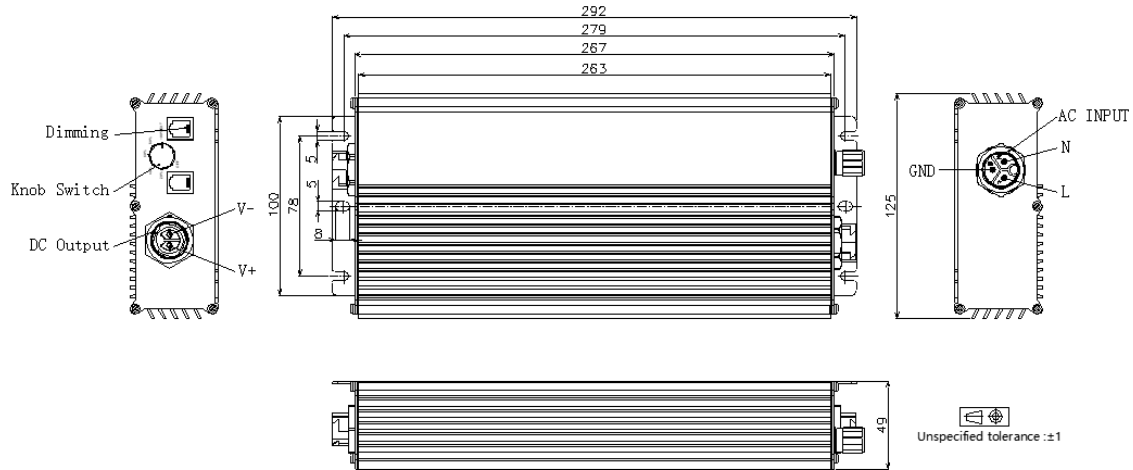


- Add suffix #abcd00 to the end of part number to indicate different configuration. Please refer to product application note AN06 or contact with us for more like **active daisy chain, master mode and button dimming** etc.

Item	Value Definition	Description
Input	a	F: M19 waterproof connector P: C14 plug N: Same cable as standard version
Output	b	F: M19 waterproof connector, 2 pin N: Same cable as standard version
Dimming	c	F: M12 waterproof connector R: RJxx (xx=25,14,12,11) connector x 2 S: 3.5mm multi-media plug N: Same cable as standard version
Knob	d	K: Knob with steps B: Knob without steps N: No knob


- RJ25 Pin Description (can be customized according to control system)

Pin	Description
1,6	12V Aux-power
2,5	Dim+
3,4	Dim-/RTN



- Knob Description

Position	Description
100%/EXT	If there is no external control, 100% output. If there is external control, output is controlled by external signal.
Off,20%,40%,60%,80%	External signal invalid.



- Output Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C16A	16000	700	30	44	1600
	15000	700	30	47	1500
	14500	700	30	49	1450
	14000	700	30	51	1400
	13500	700	32	53	1350
	13000	700	33	55	1300
	12500	700	34	56	1250
	12000	672	34	56	1250

	1250	71	34	56	1250

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C860	8600	700	49	81	860
	8500	700	49	82	850
	8400	700	50	83	840
	8200	700	51	85	820
	8000	700	53	88	800
	7800	700	54	90	780
	7600	700	55	92	760
	7400	700	57	95	740
	7200	700	58	97	720
	7000	700	60	100	700
	6800	700	62	103	680
	6600	700	64	106	660
	6400	700	66	109	640
	6200	700	68	113	620
	6000	700	70	117	600
	5800	677	70	117	600
	5600	653	70	117	600

	600	70	70	117	600

700W, 200-480Vac Input, Long Life High Quality Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C600	6000	700	70	117	600
	5800	700	72	121	580
	5600	700	75	125	560
	5400	700	78	130	540
	5200	700	81	135	520
	5000	700	84	140	500
	4800	700	88	146	480
	4600	700	91	152	460
	4400	700	95	159	440
	4200	700	100	167	420
	4000	667	100	167	420
	3800	633	100	167	420
	3600	600	100	167	420

	420	70	100	167	420

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C420	4200	700	100	167	420
	4100	700	102	171	410
	4000	700	105	175	400
	3900	700	108	179	390
	3800	700	111	184	380
	3700	700	114	189	370
	3600	700	117	194	360
	3500	700	120	200	350
	3400	700	124	206	340
	3300	700	127	212	330
	3200	700	131	219	320
	3100	678	131	219	320
	3000	656	131	219	320
	2900	634	131	219	320
	2800	613	131	219	320
	2700	591	131	219	320

	320	70	131	219	320

■ Revision History

Revision	Date	Contents
G	2022-03-22	<ol style="list-style-type: none">1. Index page added2. Reduced dimming interface sourcing current3. DALI 2.0 compatibility added4. Programming instruction added5. Inrush current data added6. Tc point position indication added7. Dielectric strength level added8. Packaging information added9. Mechanical design change with dimming cable color10. Revision history added