


Normal Geometric Tolerancing			
	$\parallel$	$\perp$	
0 to 100	0.2	0 to 10	0.2
over 100 to 150	0.3	over 10	0.3
over 150	0.5		
Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0~30	±0.25
30<U<=53	±0.25	30~53	±0.30
53<U<=70	±0.30	53~70	±0.35
70<U<=90	±0.35	70~90	±0.44
90<U<=115	±0.44	90~115	±0.55
115<U<=150	±0.55	115~150	±0.70
150<U<=200	±0.70	150~200	±0.85
200<U<=250	±0.85	200~250	±1.00
250<U<=320	±1.00	250~320	±1.20

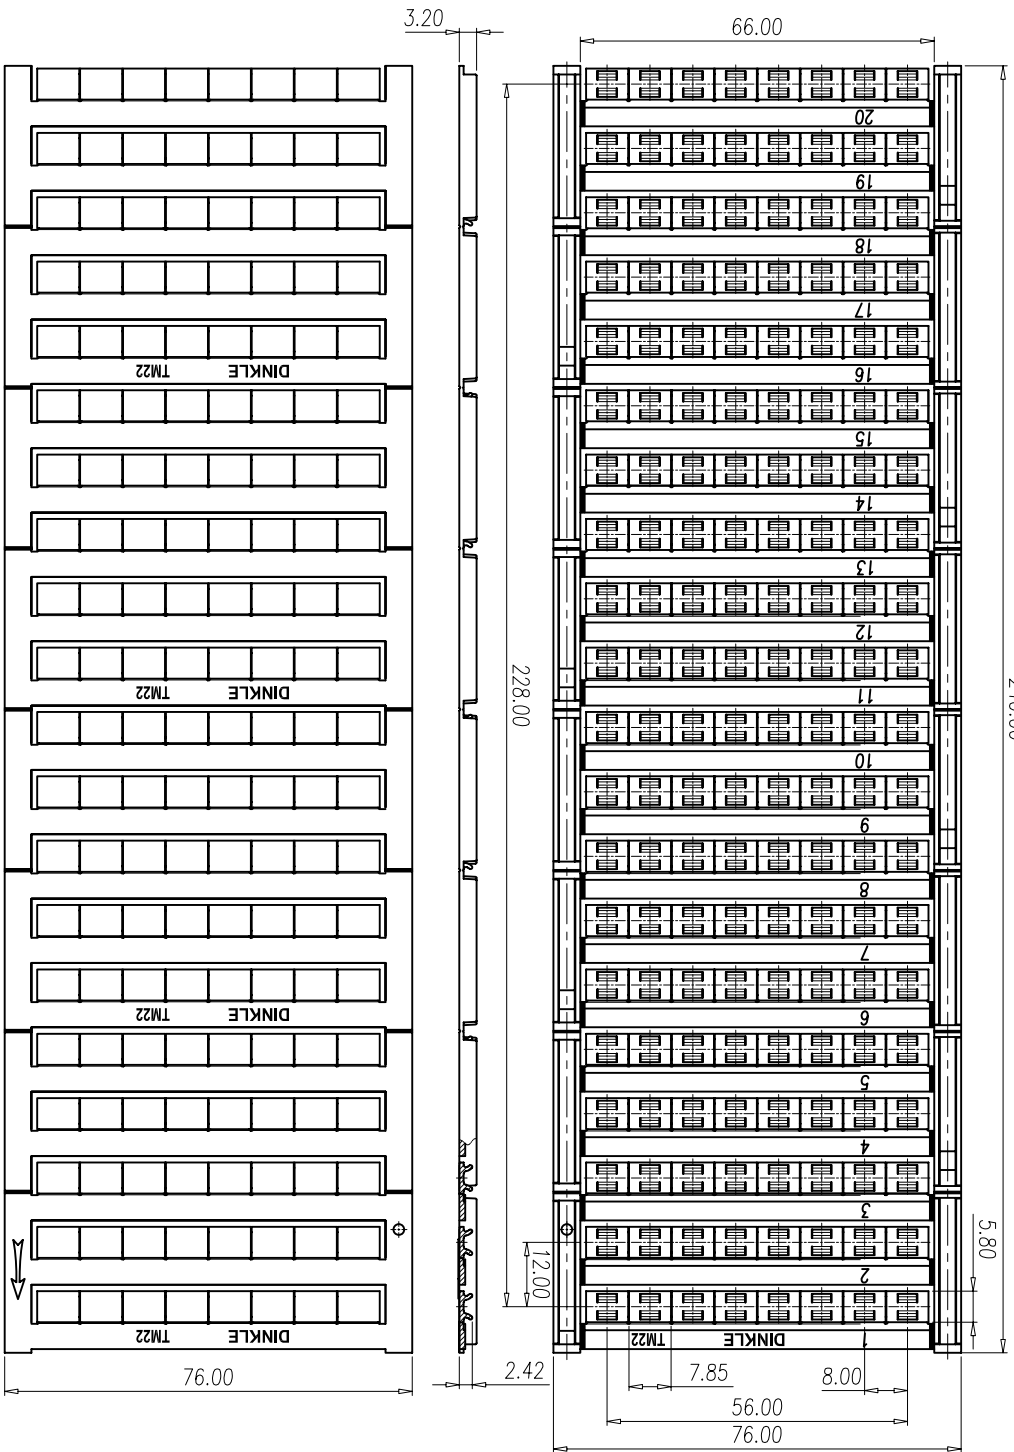

NOTES:

1. RoHS Compliance

REV.	CONTENT	CHK.	DATE	DWG. W K	DATE	CHK.	DATE	APP.	NAME	DWG NO.
					10.05.31				TM22	SP-03-TM220000