



Mechanical:


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010-01-09	

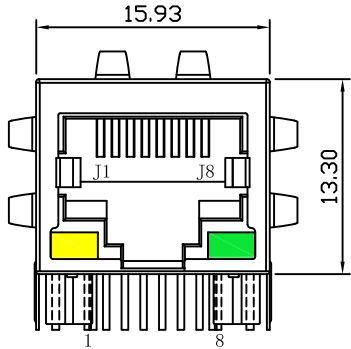



Front Side View

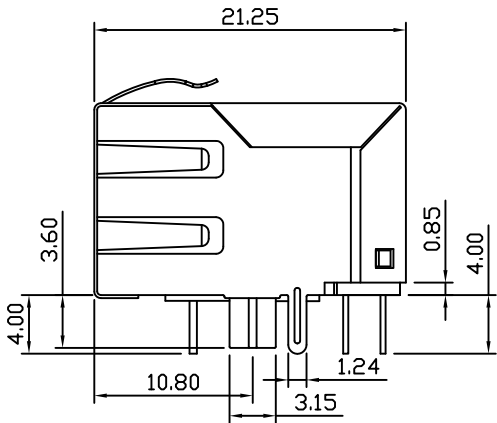


Left Side View

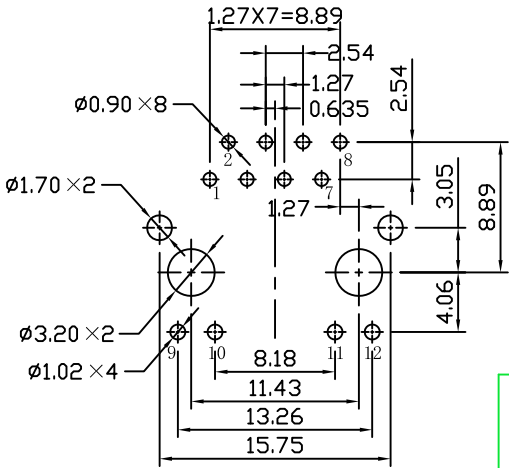

Suggested PCB Layout

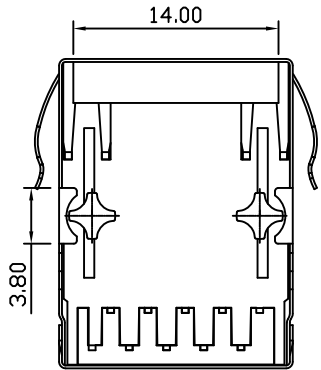

Bottom Side View



Top Side View


NOTES:

1. Designed to support application, such as SOHO (ADSL modems), LAN-on-Motherboard (LOM), hub and Switches.
2. Meets IEEE 802.3 specification
3. Connector Materials:
Housing: Thermoplastic PBT+30%G.F UL94V-0
Contact: Phosphor Bronze C5210R-EH Thickness=0.35mm
Pins: Brass C2680R-H Thickness=0.35mm
Shield: SUS 201-1/2H Thickness=0.2mm
Contact plating: Gold 6 micro-inches min. In contact area.
4. Wave solder tip temperature: 265°C Max, 5 Sec Max.
5. UL Certification: File Number E321120

X:X ±0.25	APPD:	Trxcom Huizhou Trxcom Electronics Co., Ltd.		
X:XX ±0.20	CHKD:			
X:XXX ±0.05	DR: SEA	TITLE: RJ45 Connector with 10/100 Base-T Integrated Magnetics		
ANGLES ±1°	UNIT: mm	PART NO.: TRJ4011GDNL		
	SCALE: 2/1	SHEET: 1/4	REV: A	DWG NO.: TRC10010901

Schematic:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010-01-09	

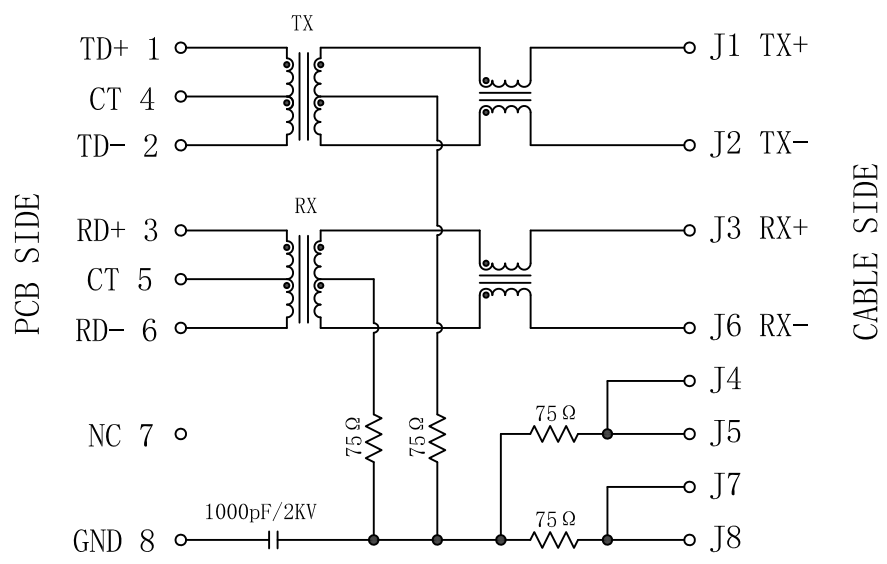

ELECTRICAL SPECIFICATIONS @25°C

- Turn Ratio($\pm 3\%$):
TX=1CT : 1CT RX=1CT : 1CT
- Inductance OCL: 350uH MIN
@100KHz 0.1V 8mA DC Bias
- Insertion Loss:
-1.0dB MAX @1-65MHz
- Return Loss:
-20dB MIN @1-10MHz
-16dB MIN @10-30MHz
-12dB MIN @30-60MHz
-10dB MIN @60-100MHz
- Cross talk:
-40dB MIN @1-30MHz
-35dB MIN @30-60MHz
-30dB MIN @60-100MHz
- Common Mode Rejection:
-30dB MIN @1-50MHz
-20dB MIN @50-150MHz
- Hipot Test: 1500Vrms
- Operating Temperature Range: -40°C TO +85°C.



Emitting Color	λ_p (nm)	VF@IF=20mA	IR @VR=5V
GREEN	565	1.8~2.6V	10 μ A max
YELLOW	585	1.8~2.6V	10 μ A max

X:X	± 0.25	APPD:	Trxcom Huizhou Trxcom Electronics Co.,Ltd.	
X:XX	± 0.20	CHKD:		
X:XXX	± 0.05	DR: SEA	TITLE: RJ45 Connector with 10/100 Base-T Integrated Magnetics	
ANGLES	$\pm 1^\circ$	UNIT: mm	PART NO.: TRJ4011GDNL	
	SCALE: 2/1	SHEET: 2/4	REV: A	DWG NO.: TRC10010901


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010-01-09	

REV: A

TEMP(℃): 25

HUM(%): 65 RH

SUGGESTED PROFILE OF WAVE SOLDER FOR ROHS PRODUCT

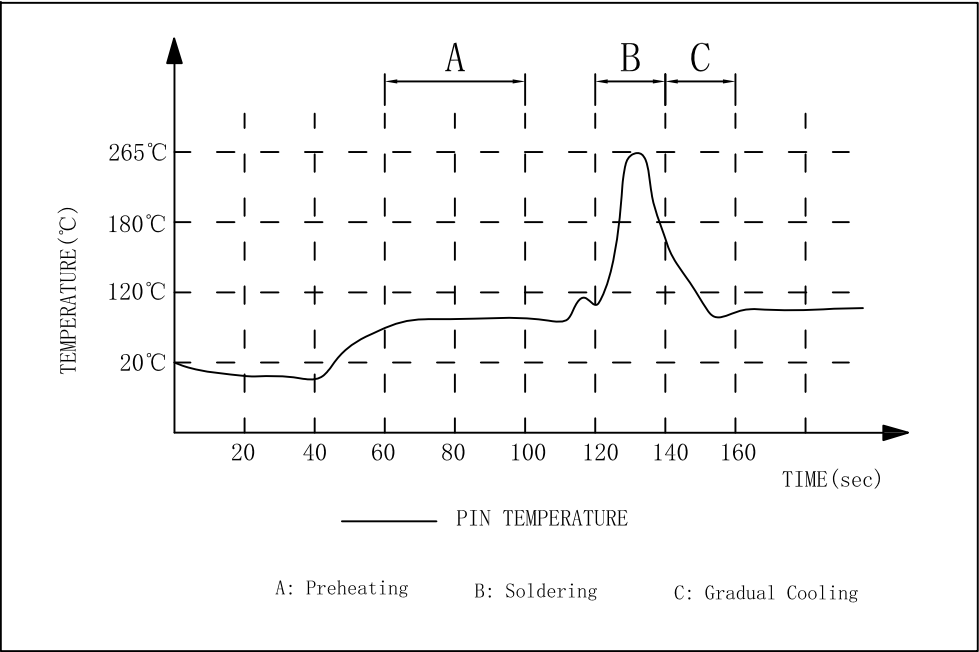


- (1) Tip Temperature: 265℃ max
- (2) Tip Temperature time: 5sec max
- Note: The melting point of Tin: 219℃


X:X ±0.25	APPD:	Trxcom Huizhou Trxcom Electronics Co.,Ltd.		
X:XX ±0.20	CHKD:			
X:XXX ±0.05	DR: SEA	TITLE: 1*4 RJ45 Connector with 10/100 Base-T Integrated Magnetics		
ANGLES ±1°	UNIT: mm	PART NO.: TRJ4011GDNL		
	SCALE: 2/1	SHEET: 3/4	REV: A	DWG NO.: TRC10010901

Packaging:

REV.	ECN NO.	DESCRIPTION	DATE	APPD.
A	REL		2010-01-09	

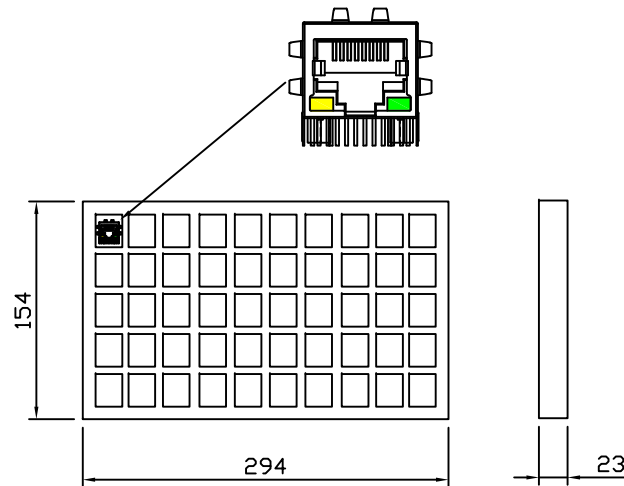

24Tray →

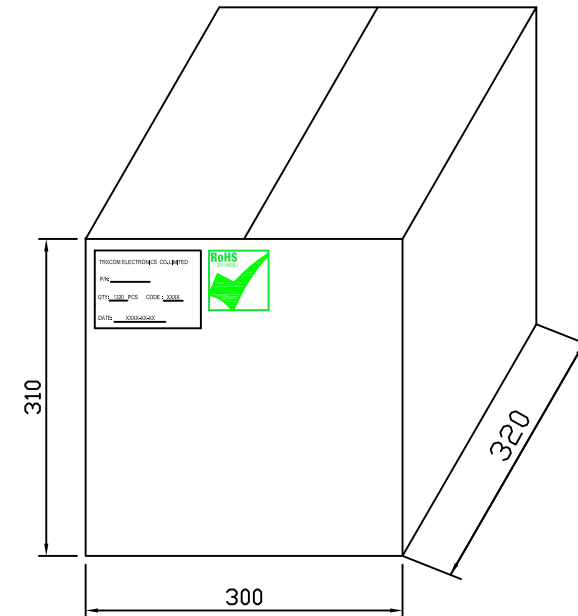

- ◆ Packaging unit :50pcs/tray
- ◆ Packaging material:PVC
- ◆ Outer carton unit:1200pcs/24tray/box
- ◆ Net Weight:8kg
- ◆ Gross Weight:10kg

X:X	±0.25	APPD:	Trxcom Huizhou Trxcom Electronics Co.,Ltd.		
X:XX	±0.20	CHKD:			
X:XXX	±0.05	DR: SEA	TITLE: 1*1 21.3 RJ45 PACKING		
ANGLES	±1°	UNIT: mm	PART NO. : TRJ4011GDNL		
		SCALE: 2/1	SHEET: 4/4	REV: A	DWG NO. : TRC10010901