

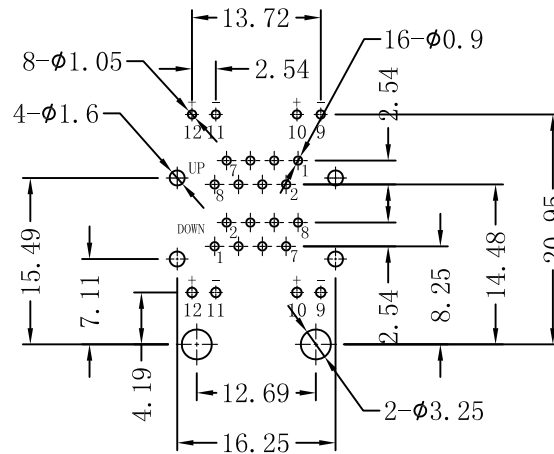

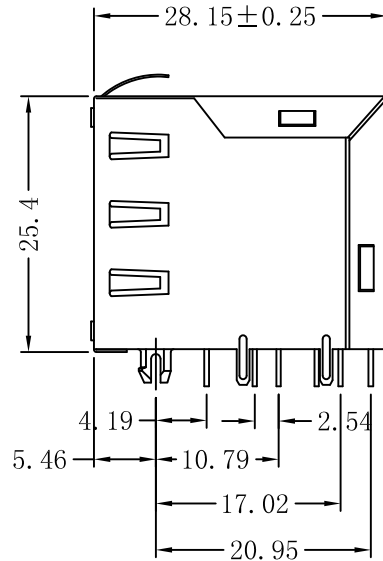
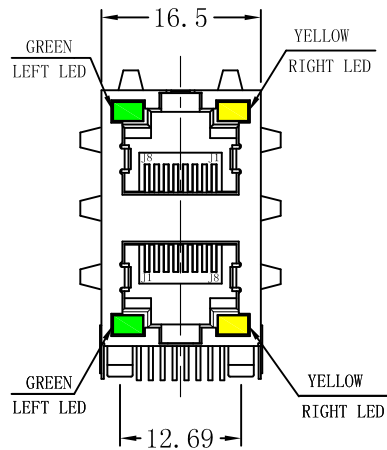


Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		03/03/2009	



SUGGESTED PCB LAYOUT (TOP VIEW)



NOTES:

MATERIAL:

1. HOUSING MATERIAL : GLASS FILLED POL YESTER UL94V-0.
2. CONTACT MATERIAL : PHISPHOR B RONZE $\phi 0.46\text{MM}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. SHIEL : 0.20 THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC.
5. DIELECTRIC WITHSTANDING RESISTANCE: 1000V AC RMS 50Hz. 1MIN
6. UL CERTIFICATION: FILE NUMBER E321120.

MECHANICAL:

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

TRJE106XAHNL

Gold Plating	"X"
1.5u"	1 <input type="checkbox"/>
3u"	2 <input type="checkbox"/>
6u"	3 <input type="checkbox"/>
15u"	4 <input checked="" type="checkbox"/>
30u"	5 <input type="checkbox"/>
50u"	6 <input type="checkbox"/>



X:X	±0.25	APPD:	Trxcom	
X:XX	±0.20	CHKD:	Huizhou Trxcom Electronics Co., ltd	
X:XXX	±0.05	DR: SEA	TITLE: DOUBLE DECK GANG PCB JACK	
ANGLES	±1°	UNIT: mm	PART NO.: TRJE1064AHNL	
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO.: TRC09030202