
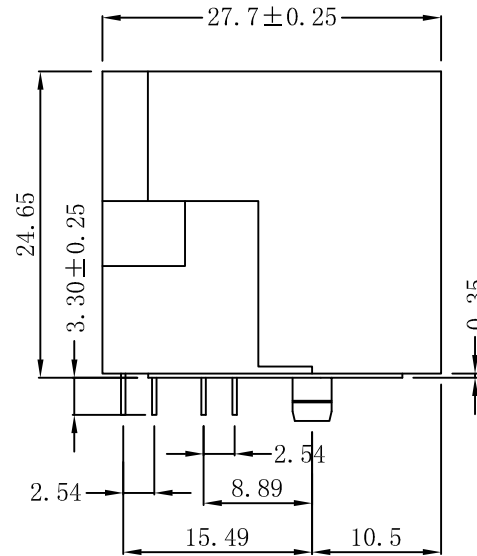


Mechanical :

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2012/01/03	

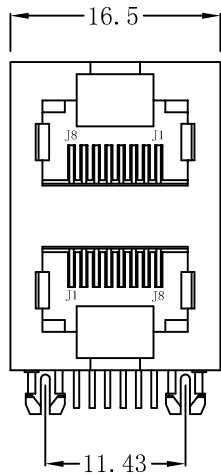

NOTES:

Electrical:



1. Voltage rating : 125 VAC RMS
2. Current Rating : 1.5 AMP
3. Contact resistance : 50 Milliohms Max
4. Insulation resistance : 1000 Megohms Min @500VDC
5. Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. Housing & Insert Material : PBT UL94V-0.
2. Contact Material : Diameter 0.45mm Phosphor Bronze
Gold Plating Over Nickel.
3. Mating/Unmating Force : 2.2KG. F Max.
4. Retention Strength : 7.7KG. F Min Between Jack and Plug.
5. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

1. Storage : -40°C ~ +85°C
2. Operation : -40°C ~ +85°C.
3. UL Certification : File Number E321120.

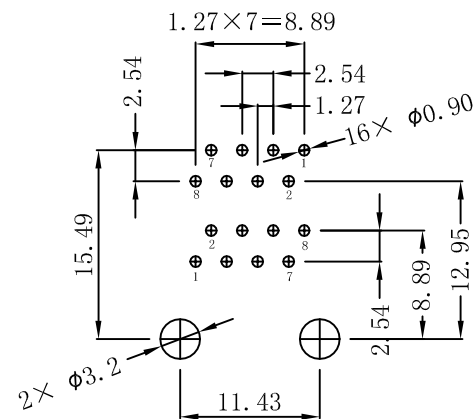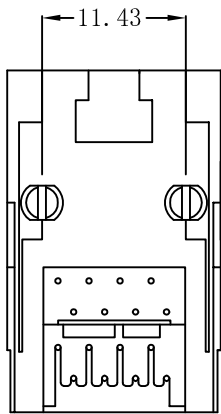

SUGGESTED PCB LAYOUT (TOP VIEW)



X:X	±0.30	APPD:	TRXCOM INT'L TECHNOLOGY CO. LTD
X:XX	±0.25	CHKD:	
X:XXX	±0.05	DR: SEA	TITLE: RJ45 DOUBLE DECK GANG PCB JACK
ANGLES	±1°	UNIT: mm	PART NO. : TRJE17208NNL (TRJE SERIES)
	SCALE: 2/1	SHEET: 1/1	REV: A DWG NO. : TRC12010301