
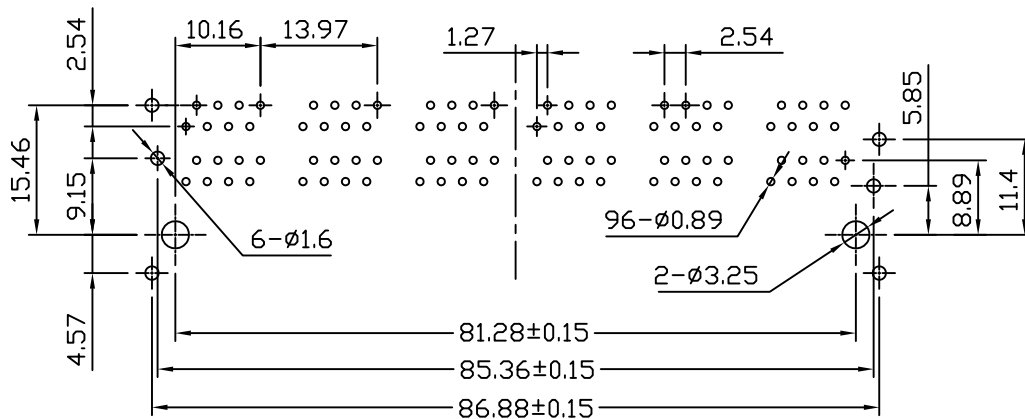
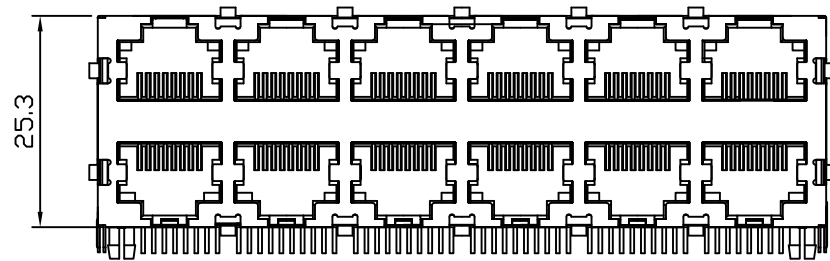
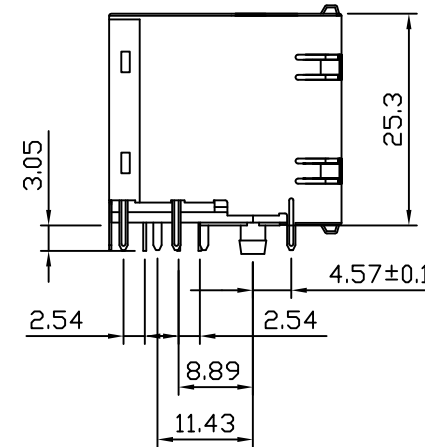


Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		13/03/2009	

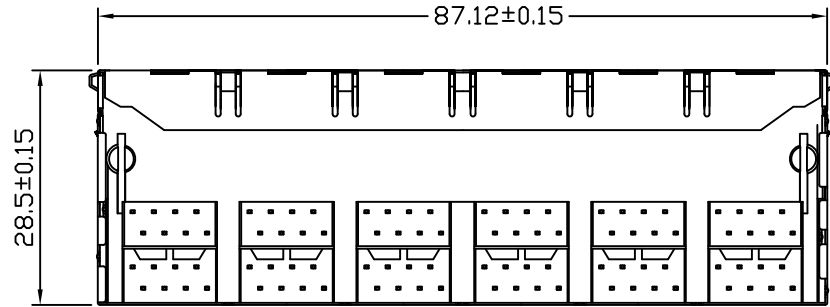

NOTES:

Electrical:

- Voltage rating : 125 VAC RMS
- Current Rating : 1.5 AMP
- Contact resistance : 50 mΩ Max
- Insulation resistance : 500 MΩ Min @500V DC
- Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.



MECHANICAL:

- Housing & Insert Material : PBT UL94V-0.
- Contact Material : Diameter 0.46mm Phosphor Bronze
Gold Plating Over Nickel.
- Shield : 0.20-0.25mm Thickness Brass With tin Plated
- Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

- Storage : -40°C ~ +85°C
- Operation : -40°C ~ +85°C.
- Wave solder temperature : 265°C 5 Sec MAX
- UL Certification : File Number E321120.

X:X ±0.25	APPD:	Trxcom		
X:XX ±0.20	CHKD:	Huizhou Trxcom Electronics Co., ltd		
X:XXX ±0.05	DR: SEA	TITLE: SIDE ENTRY PCB JACK WITH SHIELD		
ANGLES ±1°	UNIT: mm	PART NO.: TRJE309CNL		
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO.: TRC09031306