
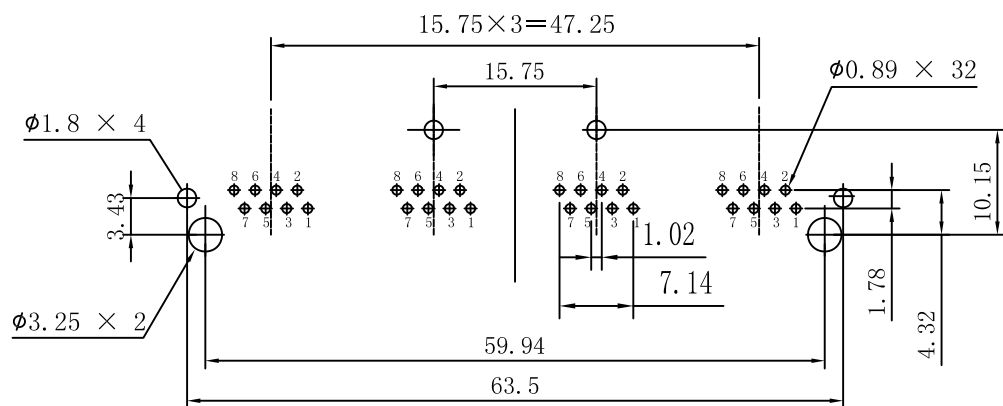
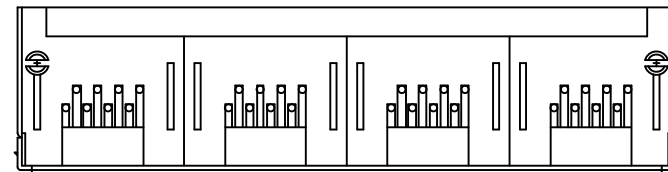



Mechanical:

REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2015-05-26	

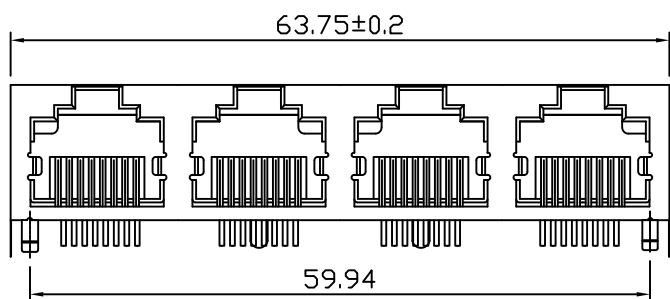

PC Board Layout (TOP VIEW)
Component Side Shown

NOTES:

Electrical:

- 1. Voltage rating : 125 VAC RMS
- 2. Current Rating : 1.5 AMP
- 3. Contact resistance : 50 mΩ Max
- 4. Insulation resistance : 500 MΩ Min @500V DC
- 5. Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. Housing & Insert Material : PBT UL94V-0.
- 2. Contact Material : Diameter 0.46mm Phosphor Bronze
Gold Plating Over Nickel.
- 3. Shield : 0.20-0.25mm Thickness Brass With tin Plated
- 3. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:



- 1. Storage : -40°C ~ +85°C
- 2. Operation : -40°C ~ +85°C.
- 3. Wave solder temperature : 265°C 5 Sec MAX
- 4. UL Certification : File Number E321120.



X:X	±0.25	APPD:	Trxcom	
X:XX	±0.20	CHKD:	Huizhou Trxcom Electronics Co., Ltd.	
X:XXX	±0.05	DR: GRANT	TITLE: 1×4 RJ45 Connector	
ANGLES	±1°	UNIT: mm	PART NO.:	TRJE401DNL
	SCALE: 1/1	SHEET: 1/2	REV: A	DWG NO.: TRC15052641

Packaging:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2015-05-26	

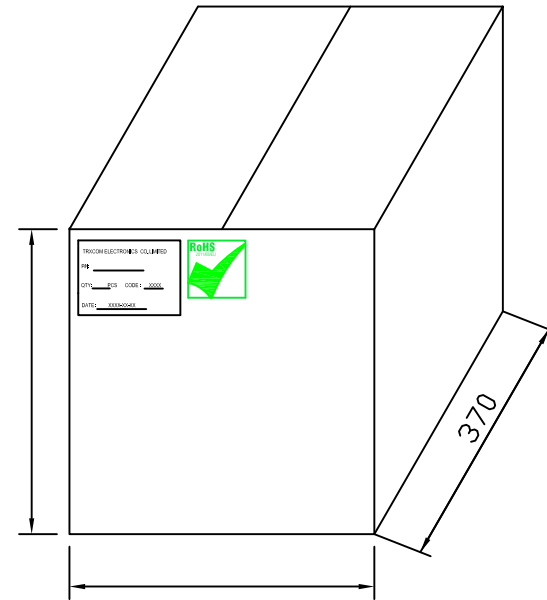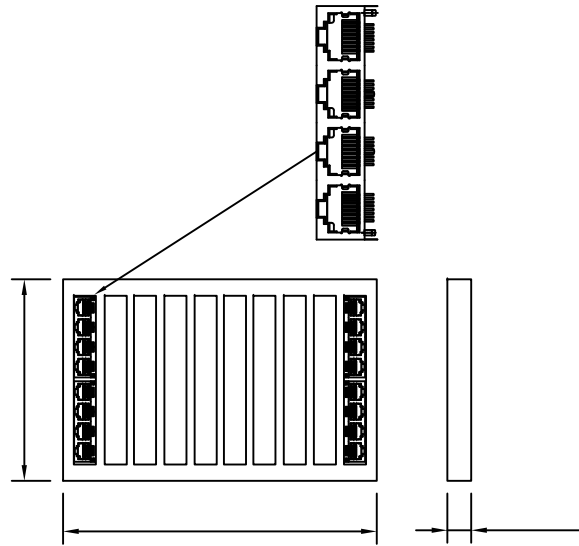

- ◆ Packaging unit :20pcs/tray
- ◆ Packaging material:PVC
- ◆ Outer carton unit:500pcs/25tray/box
- ◆ Net Weight:8kg
- ◆ Gross Weight:9kg

X:X	±0.25	APPD:	Trxcom	
X:XX	±0.20	CHKD:	Huizhou Trxcom Electronics Co.,Ltd.	
X:XXX	±0.05	DR: GRANT	TITLE: 1×4 RJ45 Connector	
ANGLES	±1°	UNIT: mm	PART NO.: TRJE401DNL	
		SCALE: 2/1	SHEET: 2/2	REV: A
				DWG NO.: TRC15052641