

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 600V / 30A
- 2.Torque Value : M3 , 4.43Lb.in
- 3.Wire Range : 30~10AWG

IEC Standard

- 1.Rated Voltage/Current : 800V / 32A
- 2.Torque Value : M3 , 0.5N·m
- 3.Wire Range : 0.2~4.0mm²


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.5mm, Poles : N=02P
- 3.Stripping length : 10mm
- 4.Withstanding Voltage : AC3500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:




Pitch range in mm			Nominal dimension range in mm						-	∩	□
TO	Over	Over	TO	Over	Over	Over	Over	Over	0.1/10		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	150	<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			

7.RoHS Compliance

TSCK4 - 02P - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)



1.00

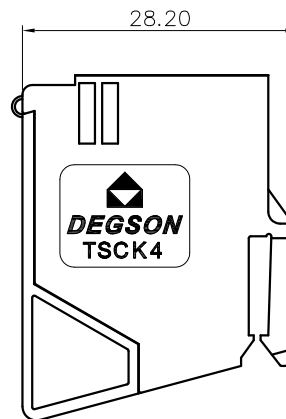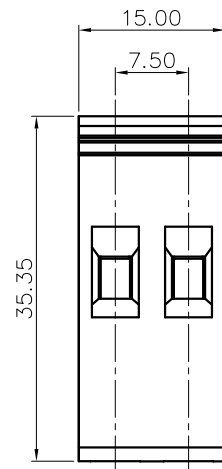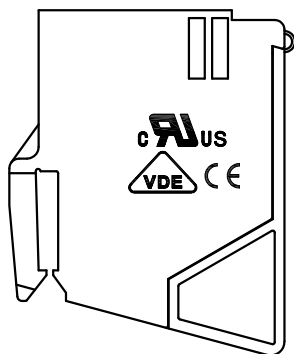

DETACHED LISTS	PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/	NAME: TSCK4-02P-1Y-00A(H)			
	CHKD:	/				
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
			 MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1