



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

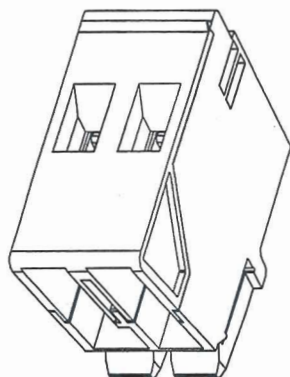

NOTES1:

UL Standard

1. Rated Voltage/Current : 600V / 30A
2. Torque Value : M3 , 4.43Lb.in
3. Wire Range : 30~10AWG

IEC Standard



1. Rated Voltage/Current : 800V / 32A
2. Torque Value : M3 , 0.5N.m
3. Wire Range : 0.2~4.0mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.5mm, Poles : N=02P
3. Stripping length : 10mm
4. Withstanding Voltage : AC3500V/1Min.
5. Operating temperature: -40°C~+105°C
6. Standard color number: PANTONE 158u
7. Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm						
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

8. RoHS Compliance

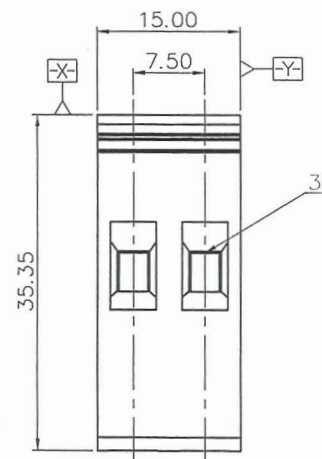

ITEM	NAME OF PART	MATERIAL	NOTES
4	SOLDER PIN	COPPER ALLOY	Sn Plated
3	CAGE	COPPER ALLOY	M3/Ni Plated
2	SCREW	COPPER ALLOY	M3/Ni Plated
1	HOUSING	PA66	UL94V-0

PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: Aaron 10/21/15	CHKD: Am 10/20/15	NAME: TSCK4-02P-15-01A(H)	
DRFT: XHY 07/16/15"		TITLE: CUSTOMER DRAWING	REV TO
THIRD ANGLE PROJECTION		DRAWING NO.: TSCK4-C02	SHEET 1/1
MM (INCH)		DO NOT SCALE DRAWING	SCALE 1/1