



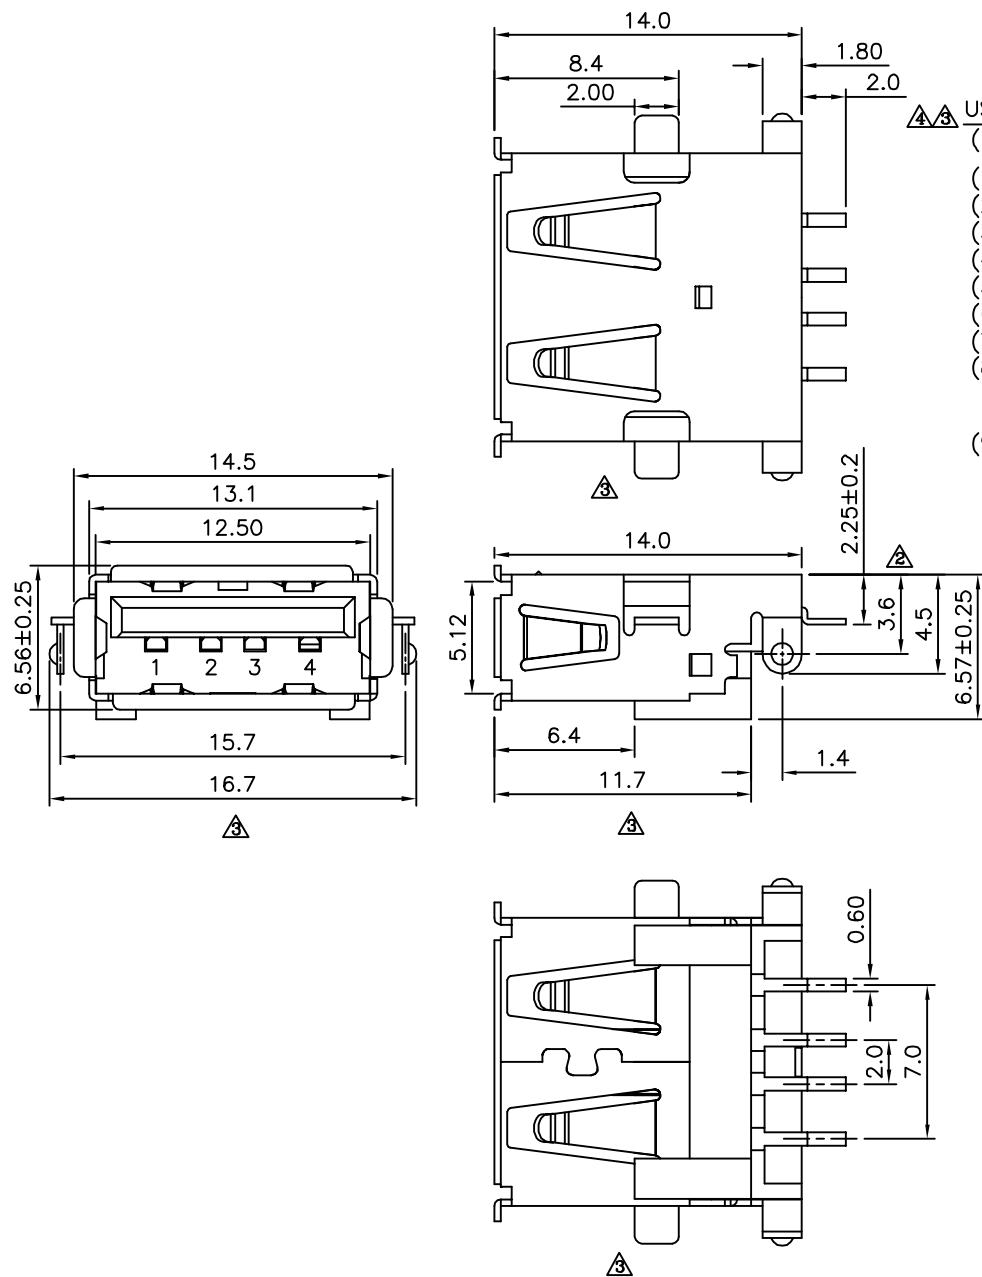

- △△ USB D 1X04 S W - 2 - M - XX - H
(1) (2) (3) (4) (5) (6) (7) (8) (9)
- (1) USB:USB Series
(2) D:Dent Type
(3) 1X04:A Type
(4) S:Female
(5) W:SMT Right Angle
(6) 2:2 Shell Tabs:DIP
(7) M:Metal Shell
(8) XX:Insulator Color
Blank:White
BK:Black
(9) H:RoHS Compliant

△ SPECIFICATION
Rated Voltage And Current:1.5A At 250V AC Min.
Withstand Voltage:750V AC(RMS)
For 1 Minute(Rev. 1.1)
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Durability(Life Test):1500 Cycles
Insertion Force:35N Max.
Extraction Force:10N Min.
RoHS Compliant

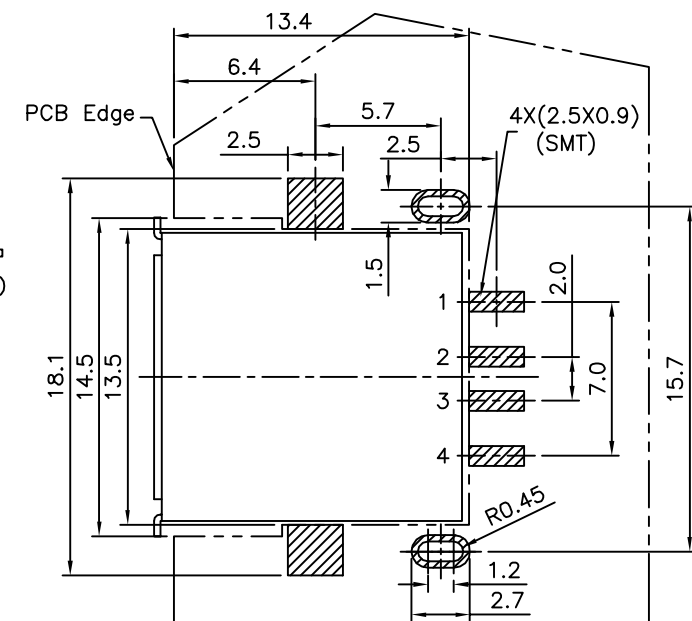

△ Recommended P.C.B. Layout(Top View)

No.	Name	Material	Q'ty	Remark
①	Housing	PA9T+G.F.	1	
②	Terminal	Phosphor Bronze	4	Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
③	Shell	Stainless	1	Nickel Plated

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No. △△
USB1X04SW-2-M-XX-H

CHECKED BY
HZF

DRAWING No.
USB1X04SW-2-M-XX-H

DRAWING BY
SAN

SCALE

NONE

REV.

A4

UNIT
mm

△△

△ A4 Modify P/N:USB1X04SW-2-XX-H
--> USB1X04SW-2-M-XX-H

HZF 03/27/2014

△ A3 Modify Data

HZF 06/20/2013

△ A2 Modify Dim

HZF 07/08/2009

△ A1 Modify P/N:USB1X04SW-2-H
--> USB1X04SW-2-XX-H

HZF 06/05/2009

△ A0 NEW RELEASE

HZF 10/06/2008

NO.REV.

REVISIONS

CHK

DATE